

RF, MICROWAVE, AND MILLIMETER WAVE IC

Selection Guide 2017

Now Including Linear Technology Products



Contents

Introduction	3	RF Mixers	19	High Speed Logic	39
New Product Listing	3	Single, Double, and Triple Balanced Mixers	19	1:2 and 1:4 Fanout Buffers	39
RF/IF Differential Amplifiers	3	I/Q Mixers and Image Reject Mixers	21	2:1 Selectors	39
Low Noise Amplifiers	3	Subharmonic Mixers	21	AND/NAND/OR/NOR	39
Linear and Power Amplifiers	4	I/Q Downconverters/Receivers	22	Clock Dividers	39
Wideband Distributed Amplifiers	4	I/Q Upconverters/Transmitters	22	D-Type Flip Flops	39
GaN Power Amplifiers	4	Mixers with Integrated LO	22	T-Flip Flops	39
Digitally Controlled VGAs	4	I/Q Modulators		XOR/XNORs	40
Baseband Programmable VGA Filters	4	and Demodulators	24	Muxes and Demuxes	40
Digital Step Attenuators	4	I/Q Modulators	24	Data Path Signal Conditioners	40
Voltage Variable Attenuators	4	I/Q Demodulators	24	Track-and-Hold Data	40
Single, Double, and Triple Balanced Mixers	5	I/Q Modulators with Integrated LO	25	Digital Crosspoint Switches	40
I/Q Mixers and Image Reject Mixers	5	I/Q Demodulators with Integrated LO	25		
I/Q Demodulators	5	Integrated Transceivers,		RF Power Detectors	41
I/Q Downconverters/Receivers	5	Transmitters, and Receivers	26	TruPwr rms Responding Detectors	41
IF Subsystem Transmitters and Receivers	5	Microwave and Millimeter Wave		Non-rms Responding RF Detectors	41
Fractional-N/Integer-N PLLs	5	Integrated Transmitters/Receivers	26	Envelope and Peak Detectors	42
Integer-N PLLs	6	PLL/Synthesizers	30	SDLVAs	42
Wideband Fractional-N/Integer-N PLLs		Integer-N PLLs	30	RF Switches	43
with Integrated VCO	6	Fractional-N/Integer-N PLLs	30	SPST	43
Phase Frequency Detectors	6	Integer-N PLLs with Integrated VCO	31	SPDT	43
Envelope and Peak Detectors	6	Narrow-Band RF Fractional-N/Integer-N		SP3T, SP4T, SP6T, SP8T	43
SPDT Switches	6	PLLs with VCO	31	Bypass, Diversity, Matrix, and Transfer	44
SP3T, SP4T, SP6T, SP8T Switches	6	Narrow-Band Fractional-N/Integer-N		Phase Shifters and	
Digital Phase Shifters	6	PLLs with Integrated VCO	32	Vector Modulators	46
		Wideband Fractional-N/Integer-N PLLs		Analog Phase Shifters	46
		with Integrated VCO	32	Digital Phase Shifters	46
				Vector Modulators	46
				Analog Multipliers	46
A Letter from ADI's RF and		Voltage Controlled Oscillators	34	Timing ICs and Clocks	47
Microwave Group's Management	7	Low Current VCOs	34	Clock Dividers and Distribution	47
RF Amplifiers	8	High Performance VCOs	34	Multiooutput Clock Generators	47
RF/IF Differential Amplifiers	8	Higher Power and Frequency VCOs	35	Clock Generators and Synchronizers	48
Low Noise Amplifiers	9	Ultrawideband VCOs	35	Clock Buffers	49
Gain Blocks and Driver Amplifiers	10	Frequency Dividers, Multipliers,		RF Design Tools	50
Wideband Distributed Amplifiers	11	and Detectors	37	ADIsimRF	50
Linear and Power Amplifiers	12	Frequency Dividers, Prescalers,		ADIsimPLL	50
GaN Power Amplifiers	13	and Counters	37	ADIsimFrequencyPlanner	50
Active Bias Controllers	13	Frequency Multipliers—Active	37	ADIsimCLK	50
		Frequency Multipliers—Passive	38	Virtual Eval	50
		Phase Frequency Detectors	38	Why ADI?	51
Variable Gain Amplifiers	15	Tunable Harmonic		Index	52
Analog Controlled VGAs	15	Low-Pass Filters	38		
Digitally Controlled VGAs	15			Design Resources	56
Baseband Programmable VGA Filters	15			Circuits from the Lab Reference Designs	56
Attenuators	16			EngineerZone	56
Digital Step Attenuators	16			Software-Defined Radio Rapid	
Voltage Variable Attenuators	16			Prototyping and Development Platforms	56
Fixed Attenuators	16				

New: recently released parts that are also available for samples.


Upcoming: parts planned for release. Samples may be available—for sample availability, please contact your local ADI salesperson.

Export Control License Disclaimer: The Export Control Classification Number (ECCN) information shown for each part in the selection guide is for informational purposes only and is not a representation or warranty regarding the proper classification. All information is provided as is and is subject to change without notice.

Introduction

1000+ Ways to Drive RF and Microwave Performance

A unique combination of design skills. Deep systems knowhow. A diverse range of process technologies. That is what's behind the industry's broadest portfolio of RF ICs, covering the entire RF signal chain from dc to beyond 100 GHz. With over 1000 high performance RF ICs, and a broad range of single chip and module package options, Analog Devices offers a wide variety of RF function blocks, as well as highly integrated solutions for the communication, T&M instrumentation, and military markets. These products are supported by a full complement of RF design and development resources, including [free design tools](#), FMC rapid prototyping platforms, [Circuits from the Lab® reference designs](#), and [EngineerZone® technical forums](#).

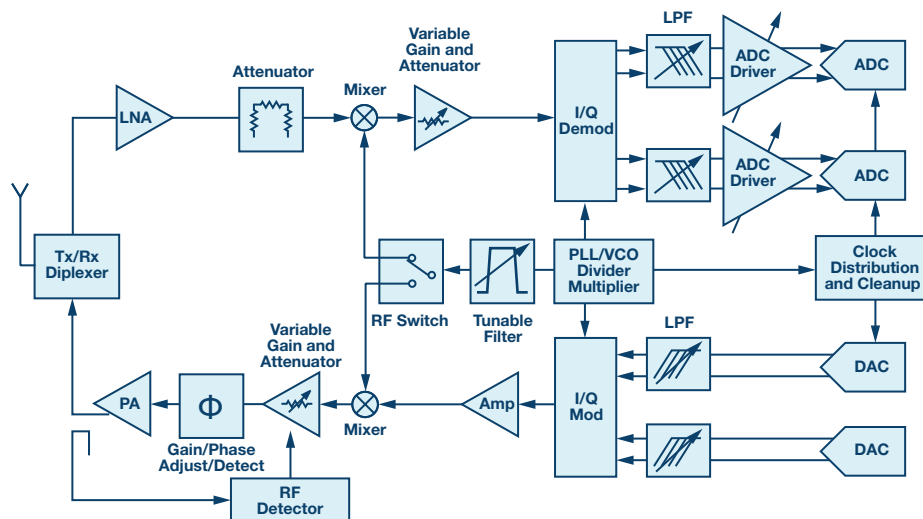

New Product Listing

RF/IF Differential Amplifiers

Part Number	Description	Frequency (MHz)	Gain Range (dB)	Output IP3 (dBm)	2 nd /3 rd Harmonic (dBc)	Noise Figure at Max Gain (dB)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
LTC6432A-15	High OIP3, low noise to 100 kHz	1400	15.9	50.3	-92.2/-86.5	3.2	5	166	4 × 4 QFN	EAR 99	LTC6432AIUF-15#TRPBF
LTC6432B-15	High OIP3, low noise to 100 kHz	1400	15.9	47	-92.2/-86.5	3.2	5	166	4 × 4 QFN	EAR 99	LTC6432BIUF-15#TRPBF
ADL5205	Parallel and serial control, dual, 1 dB step	1700	-9 to +26	48.5	-75/-87.5	6.6	3.3, 5	175	6 × 6 LFCSP	5A991.b	ADL5205ACPZ-R7
ADL5567	Dual	4300	20	49.8	-94/-103	7.1	3.3, 5	148	4 × 4 LFCSP	EAR 99	ADL5567ACPZN-R7
LTC6419	Dual resistor programmable gain with wide CM voltage range	10000	0 to 52	33.5	-85/-85	6.9	3, 5	104	4 × 3 LQFN	EAR 99	LTC6419IV#PBF LTC6419HV#PBF

Low Noise Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC8410	LNA	0.01 to 10	19.5	21.5	33	1.4	Internal	5	65	2 × 2 LFCSP	EAR 99	HMC8410LP2FE
HMC8401	LNA	0.01 to 28	14.5	16.5	26	1.5	Internal	7.5	60	Die	EAR 99	HMC8401
HMC7950	LNA	2 to 28	15	16	26	2	Internal	5	64	3 × 3 LCC	EAR 99	HMC7950LS6
HMC8402	LNA	2 to 30	13.5	21.5	26	2	Internal	7	68	Die	3A001.b.2.d	HMC8402
HMC392A	LNA	3.5 to 7	17.2	19.5	32.5	1.7	Internal	5	59	Die	EAR 99	HMC392A
HMC392A	LNA	3.5 to 8	17	19	34.5	1.8	Internal	5	61	4 × 4 LFCSP	EAR 99	HMC392ALC4
HMC717A	LNA	4.8 to 6	14.5	18	29.5	1.3	External	5	68	3 × 3 LFCSP	EAR 99	HMC717ALP3E
ADL5721	LNA	5.9 to 8.5	25.9	-10.6	4	1.6	Internal	3.3	86.5	2 × 2 LFCSP	EAR 99	ADL5721ACPZN-R7
ADL5723	LNA	10.1 to 11.7	24.5	-10	2.2	2.2	Internal	3.3	109.1	2 × 2 LFCSP	EAR 99	ADL5723ACPZN-R7
ADL5724	LNA	12.7 to 15.4	26.4	-8	2	2.1	Internal	3.3	109.7	2 × 2 LFCSP	EAR 99	ADL5724ACPZN-R7
ADL5725	LNA	17.7 to 19.7	27.8	-11.5	-1.5	2.4	Internal	3.3	108	2 × 2 LFCSP	EAR 99	ADL5725ACPZN-R7
ADL5726	LNA	21.2 to 23.6	24.7	-8	1	3.3	Internal	3.3	92.4	2 × 2 LFCSP	EAR 99	ADL5726ACPZN-R7
HMC8325	LNA	71 to 86	21	13	22	3.6	Internal	3	50	Die	3A001.b.2.g	HMC8325

Linear and Power Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Match	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC952A	Power amp	9 to 14	33	36	43	—	Internal	6	1400	5 × 5 LFCSP	EAR 99	HMC952ALP5GE
HMC1121	Power amp	5.5 to 7.5	27	36	44	—	Internal	7.5	2200	6 × 6 LFCSP	3A001.b.2.d	HMC1121LP6GE
HMC1132	Power amp	27 to 32	22	30.5	35	—	Internal	6	600	5 × 5 LFCSP	3A001.b.2.d	HMC1132
HMC7229	Power amp	33 to 37	24.5	31.5	39.5	—	Internal	6	1200	Die	3A001.b.2.d	HMC7229

Wideband Distributed Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Match	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC637A	Distributed	0 to 6	13	29	44	5	Internal	12	400	Die	EAR 99	HMC637A
HMC930A	Distributed	0 to 40	13	22	33.5	4.5	Internal	10	175	Die	3A001.b.2.d	HMC930A
HMC5805A	Distributed	0 to 40	13.5	24.5	29	4.5	Internal	10	175	6 × 6 LFCSP	3A001.b.2.d	HMC5805ALS6

GaN Power Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P4dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Match	P _{SAT} (dBm)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC8500	>10 W, GaN PA	0.01 to 2.8	16	40	49	4.5	Internal	41	28	100	5 × 5 QFN	EAR 99	HMC8500LPD5DE
HMC1114	10 W, GaN PA	2.7 to 3.8	25.5	41	44	14	Internal	41.5	28	150	5 × 5 LFCSP	3A001.b.2.a.4	HMC1114LP5DE

Digitally Controlled VGAs

Part Number	Description	Frequency (GHz)	Gain Range (dB)	Step (dB)	Output IP3 (dBm)	Noise Figure (dB)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC625B	Gain block/VGA/driver amp parallel/serial control	0 to 5	−13.5 to +18	0.5	33	6	5	87.5	5 × 5 LFCSP	EAR 99	HMC625BLP5E

Baseband Programmable VGA Filters

Part Number	Description	Bandwidth (MHz)	Gain Range (dB)	Output IP3 (dBm)	Noise Figure (dB)	V _S (V)	I _S (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADRF6520	Dual, with selectable LPF for E-band	LF to 1250	−6 to +54	27 dBV	11	3.3	420	5 × 5 LFCSP	5A991.b	ADRF6520ACPZ-R7

Digital Step Attenuators

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Atten Range (dB)	Step (dB)	Input IP3 (dBm)	P0.1 dB (dBm)	Control Input (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC291S	2-bit DSA	0.7 to 4	0.9	0.7 to 12.7	4	54	26	—	SOT-26	EAR 99	HMC291SE
HMC629A	4-bit	0 to 6	2.5	3 to 45	3	50	—	0/+5	4 × 4 LFCSP	EAR 99	HMC629ALP4E
HMC470A	5-bit	0 to 3	1.7	1.3 to 32.3	1	48	27	0/+5	3 × 3 LFCSP	EAR 99	HMC470ALP3E
HMC424A	6-bit	0.1 to 3	3	3 to 34.5	0.5	42	23	0/−5	MSOP	EAR99	HMC424AG16
HMC424A	6-bit	0.1 to 13	3.3	3.3 to 34.3	0.5	42	23	0/−5	5 × 5 QFN	EAR99	HMC424ALH5
HMC539A	5-bit	0 to 4	1	0.7 to 8.45	0.25	50	28	0/+5	3 × 3 LFCSP	EAR 99	HMC539ALP3E
HMC1019A	5-bit DSA	0.1 to 30	4	0.5 to 15.5	0.5	45	25	0/+5	4 × 4 LFCSP	EAR 99	HMC1019ALP4E
HMC1018A	5-bit DSA	0.1 to 30	5.5	4.5 to 35.5	1	42	22	0/+5	4 × 4 LFCSP	EAR 99	HMC1018ALP4E
HMC1119	7-bit serial/parallel DSA	0.1 to 6	1.5	1.3 to 33.5	0.25	54	30	+3.3 to +5	4 × 4 LFCSP	EAR 99	HMC1119LP4ME
HMC941A	5-bit	0.1 to 33	4	2.5 to 18	0.5	43	24	0/+5	4 × 4 LFCSP	EAR 99	HMC941ALP4E
HMC941A	5-bit	0.1 to 30	4	2.5 to 18	0.5	43	24	0/+5	Die	EAR 99	HMC941A
HMC939A	5-bit	0.1 to 33	5.5	1 to 31	1	43	23	0/+5	4 × 4 LFCSP	EAR 99	HMC939ALP4E
HMC939A	5-bit	0.1 to 40	4.2	4 to 34	1	43	23	0/+5	Die	EAR 99	HMC939A
HMC1119	7-bit	0.1 to 6	1.5	1.3 to 33.5	0.25	54	30	+3.3 to +5	4 × 4 LFCSP	EAR 99	HMC1119LP4ME

Voltage Variable Attenuators

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Atten Range (dB)	Input IP3 (dBm)	Control Input (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC973A	Analog VVA	0.5 to 6	3.5	3.5 to 29.5	35	0 to 5	3 × 3 LFCSP	EAR99	HMC973ALP3E

Single, Double, and Triple Balanced Mixers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	IP3 Input Typ (dBm)	LO/RF Isolation (dB)	LO/IF Isolation (dB)	NF Typ (dB)	P1dB Input Typ (dBm)	LO Drive Nominal (dBm)	Package (mm)	ECCN Code	Ordering Part Number
HMC219B	Passive	2.5 to 7	2.5 to 7	0 to 3	−9	18	40	35	9	11	13	MSOP	EAR 99	HMC219BMS8GE
HMC557A	Passive	2.5 to 7	2.5 to 7	0 to 3	−7	22	47	34	7	10	15	4 × 4 LFCSP	EAR 99	HMC557ALC4
HMC787A	Passive	3 to 10	3 to 10	0 to 4	−9	24	43	26	9	17	13	3 × 3 LFCSP	EAR 99	HMC787ALC3B
HMC558A	Passive	5.5 to 14	5.5 to 14	0 to 6	−7.5	21	45	45	7.5	11.5	15	3 × 3 LFCSP	EAR 99	HMC558ALC3B
HMC412B	Passive	9 to 15	9 to 15	0 to 2.5	−8.4	18	44	41	8.4	11	13	MSOP	EAR 99	HMC412BMS8GE
LTC5553	Passive with LO buffer	3 to 20	1 to 20	0.5 to 9	−11.6	21.5	33	20	12.8	16	0	3 × 2 QFN	EAR 99	LTC5553IUDB#TRPBF

I/Q Mixers and Image Reject Mixers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	Image Rejection (dB)	LO/RF Isolation (dB)	LO/IF Isolation (dB)	P1dB Input Typ (dBm)	LO Drive Nominal (dBm)	Package (mm)	ECCN Code	Ordering Part Number
HMC520A	I/Q and IRM	6 to 10	6 to 10	0 to 3.5	−8	19	23	43	25	10	15	4 × 4 LFCSP	EAR 99	HMC520ALC4
HMC8191	I/Q and IRM	6 to 26	6 to 26	0 to 5	−9	20	25	42	41	12	18	4 × 4 LFCSP	EAR 99	HMC8191LC4

I/Q Demodulators

Part Number	Description	RF Frequency (MHz)	Gain Error (dB)	Phase Error (°)	Noise Figure (dB)	Input P1dB (dBm)	Input IP3 (dBm)	Baseband Bandwidth @ 3 dB (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
LTC5586	Ultrawideband, with VGA, digital cal	0.3 to 6	0.06	0.06	19.5	13	30	1000	5	440	5 × 5 QFN	EAR 99	LTC5586IUH#TRPBF

I/Q Downconverters/Receivers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	Image Rejection (dBc)	NF Typ (dB)	LO Drive Nominal (dBm)	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC8108	I/Q downconverter	9 to 10	9 to 10	0.02 to 1	13	6	20	2	−5	3, 3, 1.5	20, 30, 40	5 × 5 LFCSP	EAR 99	HMC8108LC5
HMC6789B	I/Q downconverter	37 to 44	16.5 to 24	0 to 4	14	−1	14	3.5	3	150, 75	3, 3,	5 × 5 LFCSP	EAR 99	HMC6789BLC5A

IF Subsystem Transmitters and Receivers

Part Number	Description	RF (GHz)	IF (GHz)	Conversion Gain (dB)	RF VGA Dynamic Range (dB)	IF VGA Dynamic Range (dB)	Output IP3 Typ (dBm)	Image Rejection (dBc)	Noise Figure (dB)	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC8100	Intermediate frequency receiver	0.8 to 4	0.08 to 0.2	85	47	49	18	36	5	3.3	600	6 × 6 LFCSP	5A991.b	HMC8100LP6JE
HMC8200	Intermediate frequency transmitter	0.8 to 4	0.2 to 0.7	34	35	—	31	15	6	3.3	540	5 × 5 LFCSP	5A991.b	HMC8200LP5ME

Fractional-N/Integer-N PLLs

Part Number	Description	Frequency (GHz)	Figure of Merit (dBc/Hz)	PFD _{MAX} (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADF4152HV	Fractional-N/integer-N PLLs	0.5 to 5	−213	26	3.3	50	5 × 5 LFCSP	EAR 99	ADF4152HV

Integer-N PLLs

Part Number	Description	Frequency (GHz)	Figure of Merit (dBc/Hz)	PFD _{MAX} (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC4069	Integer-N PLL (N = 2 – 32)	0.01 to 2.9	–233	1300	5	295	4 × 4 LFCSP	3A001.a.11.b	HMC4069LP4E

Wideband Fractional-N/Integer-N PLLs with Integrated VCO

Part Number	Description	Frequency (GHz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	VCO Phase Noise @ 1 MHz (dBc/Hz)	Figure of Merit (dBc/Hz)	PFD _{MAX} Frac-N Mode (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADF4356	Wideband frac-N/int-N PLL and VCO	0.053 to 6.8	–115	–137	–227	125	3.3/5	110/80	6 × 5 LFCSP	5A991.b	ADF4356BCPZ

Phase Frequency Detectors

Part Number	Description	Input Freq (GHz)	Input Power (dBm)	10 kHz Phase Noise (dBc/Hz)	Output Level (mA)	V _{CC} (V)	I _{CC} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC3716	High frequency phase frequency detector	0.01 to 1.3	–10 to +5	–153	2 V p-p	5	115	4 × 4 LFCSP	3A001.a.11.b	HMC3716LP4E

Envelope and Peak Detectors

Part Number	Description	Frequency (GHz)	Envelope Bandwidth (MHz)	Input Range (dB)	Temperature Drift (dB)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADL5910	Threshold detector	0.45 to 6	—	45	±0.5	3.3	3	3 × 3 LFCSP	EAR 99	ADL5910ACPZN-R7

SPDT Switches

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P1 (dB)	Input P0.1 (dB)	Input IP3	Control Input (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC574A	5 W, Tx/Rx	0 to 3	0.25	30	38	36	63	0/+3 to +8	8-lead MSOP	EAR 99	HMC574AMS8E
ADRF5130	44 W, Reflective	0.7 to 3.5	0.6	50	—	46	68	0/+3.3 to +5	3 × 3 LFCSP	EAR 99	ADRF5130BCPZ
HMC784A	10 W, T/R	0.1 to 4	0.4	28	38	36	62	0/+3 to +8	MSOP	EAR 99	HMC784AMS8GE
HMC270A	Nonreflective	0 to 8	1	45	28	—	42	0/–5	MSOP	EAR 99	HMC270AMS8GE
HMC347A	Nonreflective	0.1 to 14	2.1	46	29	—	47	0/–5	3 × 3 LFCSP	EAR 99	HMC347ALP3E
HMC347A	Nonreflective	0.1 to 20	1.7	45	29	—	45	0/–5	Die	EAR 99	HMC347A
HMC547A	Nonreflective	0 to 20	2	45	23	—	47	0/–5	3 × 3 LFCSP	EAR 99	HMC547ALP3E
ADRF5021	Nonreflective	~0 to 30	2	60	28	27	52	0 to +3/+5.4	3 × 3 LGA	EAR 99	ADRF5021BCCZN
ADRF5020	Nonreflective	0.1 to 30	1.4	56	27	—	50	0/+3.3	3 × 3 LGA	EAR 99	ADRF5020BCCZN
HMC986A	Reflective	0.1 to 50	1.7	36	25	21	40	0/–3	Die	EAR 99	HMC986A

SP3T, SP4T, SP6T, SP8T Switches

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P1 (dB)	Input P0.1 (dB)	Input IP3	Control Input (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
ADRF5040	SP4T	~0 to 12	0.8	34	34	34	58	0/+3.3	4 × 4 LFCSP	EAR 99	ADRF5040

Digital Phase Shifters

Part Number	Description	Frequency (GHz)	Loss (dB)	Phase Range Frequency (°)	Phase Adjust Resolution	RMS Phase Error (°)	Input IP3 (dBm)	Input P1dB (dBm)	Package (mm)	ECCN Code	Ordering Part Number
HMC936A	6-bit	1.2 to 1.4	5	360	6-bit, 5.625°	1.2	45	29	6 × 6 LFCSP	EAR 99	HMC936ALP6E

A Letter from ADI's RF and Microwave Group's Management

Thank you for considering Analog Devices. With more than 1000 commercially available parts, Analog Devices has the industry's broadest RF, microwave, and millimeter wave portfolio—and it continues to grow. We have created the *RF, Microwave, and Millimeter Wave IC Selection Guide* to give you quick and easy access to information so you can find the best parts for your designs.

Analog Devices' and Linear Technology's Integrated RF Selection Guide

With Analog Devices and Linear Technology now as one company, we are excited to include RF and microwave products from both companies in this selection guide. Linear Technology's RF portfolio adds several new amplifiers, mixers, modulators/demodulators, PLLs, power detectors, and timing ICs and clocks to the joint portfolio. This gives designers an even bigger selection of RF parts to select from, allowing them to quickly find the right part for their designs.



Supporting a Complete Signal Chain Solution

With the rapid growth of global mobile data needs, industrial sensor applications, military radars, and interest in 5G and IoT (Internet of Things), companies today require complete signal chain solutions so they can bring products to market faster. There's very little time to select individual components from multiple vendors and make them work together for their desired application. We realize this is a critical shift in the design approach, and so we've created this new selection guide that simplifies part selection for your design needs. It features:

- ▶ A complete selection of parts for each component in the RF signal chain
- ▶ Clearly highlighted parts that are available in ADIsimRF and ADIsimPLL simulation tools
- ▶ A separate category of integrated transmitter/receiver parts
- ▶ A resource library of different simulation tools to help with your designs

Easy Access to New Products

We have also included a "New Product List" and featured product pages to highlight recently released and noteworthy parts for your designs. In addition, we have marked several parts to be released in the near future so you can consider those for upcoming designs.

Tools and Support

In order to simplify the overall design process, our RF and microwave products are complemented with a range of RF design and development resources, including free design tools, FMC rapid prototyping platforms, Circuits from the Lab® reference designs, and EngineerZone® technical forums. In this guide we have specifically highlighted parts that are also available in Analog Devices' RF simulation tools.

These are exciting times in the RF and microwave industry. We're glad to have the opportunity to provide innovative technical solutions to help you develop a smarter and more connected world.

Sincerely,

Greg Henderson
Vice President,
RF and Microwave Group

RF Amplifiers

RF/IF Differential Amplifiers

Part Number	Description	Frequency (MHz)	Gain Range (dB)	Output IP3 (dBm)	2 nd /3 rd Harmonic (dBc)	Noise Figure at Max Gain (dB)	V _S (V)	I _{SV} (mA)	Package (mm)	ECCN Code	Ordering Part Number
AD8372	Dual, 1 dB step	130	−9 to +32	35	−78/−85	7.9	5	212	5 × 5 LFCSP	EAR 99	AD8372ACPZ-R7
AD8375	Dual, 1 dB step	630	−4 to +20	50	−85/−92	8.3	5	125	4 × 4 LFCSP	EAR 99	AD8375ACPZ-R7
ADL5201	Parallel and serial control, 0.5 dB step	700	−11.5 to +20	51	−89/−97	7.5	5	110	4 × 4 LFCSP	EAR 99	ADL5201ACPZ-R7
ADL5202	Parallel and serial control, dual, 0.5 dB step	700	−11.5 to +20	50	−86/−105	7.5	5	210	6 × 6 LFCSP	EAR 99	ADL5202ACPZ-R7
AD8376	Dual, 1 dB step	700	−4 to +20	50	−82/−91	8.7	5	250	5 × 5 LFCSP	EAR 99	AD8376ACPZ-R7
AD8370	<1 dB step	750	−8 to +34	35	−65/−62	7.2	3, 5	79	TSSOP	EAR 99	AD8370AREZ-RL7
AD8350	Fixed-gain	900	15	28	−66/−65	6.8	5	28, 30	SOIC	EAR 99	AD8350ARMZ15-REEL7
AD8350	Fixed-gain	900	20	28	−66/−65	6.8	5	28, 30	MSOP	EAR 99	AD8350ARMZ20-REEL7
ADL5205 New	Parallel and serial control, dual, 1 dB step	1700	−9 to +26	48.5	−75/−87.5	6.6	3.3, 5	175	6 × 6 LFCSP	5A991.b	ADL5205ACPZ-R7
AD8351	Resistor programmed	2200	0 to 26	31	−79/−81	15.5	3, 5	28	MSOP	EAR 99	AD8351ACPZ-R7
AD8352	Resistor programmed	2200	3 to 25	41	−83/−82	15.5	3, 5	37	3 × 3 LFCSP	EAR 99	AD8352ACPZ-R7
ADL5561	Pin strap	2900	6, 12, 15.5	49	−95/−87	8	3.3	40	3 × 3 LFCSP	EAR 99	ADL5561ACPZ-R7
ADA4961	Parallel and serial control, 1 dB step	3200	−3 to +18	50	−84/−100	5.6	3, 5	150	4 × 4 LFCSP	EAR 99	ADA4961ACPZN-R7
ADL5562	Pin strap	3300	6, 12, 15.5	47	−104/−87	7.3	3.3	80	3 × 3 LFCSP	EAR 99	ADL5562ACPZ-R7
ADL5566	Dual	4500	16	51	−94.7/−100	6.58	3, 5	140, 160	4 × 4 LFCSP	EAR 99	ADL5566ACPZ-R7
ADL5565	Pin strap	7000	6, 12, 15.5	53	−108/−103	8.7	3, 5	70, 80	3 × 3 LFCSP	EAR 99	ADL5565ACPZ-R7
ADL5567 New	Dual	4300	20	49.8	−94/−103	7.1	3.3, 5	148	4 × 4 LFCSP	EAR 99	ADL5567ACPZN-R7
LTC6400-8	Fixed 8 dB gain	2200	8	37.5	−86/−71	7.7	3	85	3 × 3 QFN	EAR 99	LTC6400CUD-8#TRPBF LTC6400IUD-8#TRPBF
LTC6400-14	Fixed 14 dB gain	1900	14	38	−78/−74	7.7	3	85	3 × 3 QFN	EAR 99	LTC6400CUD-14#TRPBF
LTC6400-20	Fixed 20 dB gain	1800	20	41.5	−74/−74	6.5	3	90	3 × 3 QFN	EAR 99	LTC6400CUD-20#TRPBF LTC6400IUD-20#TRPBF
LTC6400-26	Fixed 26 dB gain	1900	26	38	−83/−72	6.9	3	85	3 × 3 QFN	EAR 99	LTC6400CUD-26#TRPBF LTC6400IUD-26#TRPBF
LTC6401-8	Fixed 8 dB gain	2200	8	33.5	−78/−59	12.3	3	45	3 × 3 QFN	EAR 99	LTC6401CUD-8#TRPBF LTC6401IUD-8#TRPBF
LTC6401-14	Fixed 14 dB gain	2000	14	33	−79/−57	7.4	3	45	3 × 3 QFN	EAR 99	LTC6401CUD-14#TRPBF LTC6401IUD-14#TRPBF
LTC6401-20	Fixed 20 dB gain	1300	20	30.5	−80/−57	6.4	3	50	3 × 3 QFN	EAR 99	LTC6401CUD-20#TRPBF LTC6401IUD-20#TRPBF
LTC6401-26	Fixed 26 dB gain	1600	26	30	−81/−54	6.5	3	45	3 × 3 QFN	EAR 99	LTC6401CUD-26#TRPBF LTC6401IUD-26#TRPBF
LT6402-6	Fixed 6 dB gain	300	6	36	−84/−84	12.6	5	30	3 × 3 QFN	EAR 99	LT6402CUD-6#TRPBF LT6402IUD-6#TRPBF
LT6402-12	Fixed 12 dB gain	300	12	37	−82/−73	15.1	5	30	3 × 3 QFN	EAR 99	LT6402CUD-12#TRPBF LT6402IUD-12#TRPBF
LT6402-20	Fixed 20 dB gain	300	20	36.5	−80/−80	12.5	5	30	3 × 3 QFN	EAR 99	LT6402CUD-20#TRPBF LTC6402IUD-20#TRPBF
LTC6403-1	Resistor programmed	200	0 to 40	28	−76/−74	10.8	3, 5	11	3 × 3 QFN	EAR 99	LTC6403CUD-1#TRPBF LTC6403IUD-1#TRPBF
LTC6404-1	Unity-gain stable, resistor programmed	500	0	41.5	−102/−90	13.4	3, 5	27.8	3 × 3 QFN	EAR 99	LTC6404CUD-1#TRPBF LTC6404IUD-1#TRPBF LTC6404HUD-1#TRPBF
LTC6404-2	>6 dB gain resistor programmed	900	>6	45	−98/−98	10	3, 5	30.4	3 × 3 QFN	EAR 99	LTC6404CUD-2#TRPBF LTC6404IUD-2#TRPBF LTC6404HUD-2#TRPBF
LTC6404-4	>12 dB gain resistor programmed	1700	>12	45.5	−100/−100	8	3, 5	31	3 × 3 QFN	EAR 99	LTC6404CUD-4#TRPBF LTC6404IUD-4#TRPBF LTC6404HUD-4#TRPBF
LTC6405	Resistor programmed	700	0 to 40	23.4	−82/−65	7.5	5	18	3 × 3 QFN	EAR 99	LTC6405CUD#TRPBF LTC6405IUD#TRPBF
LTC6406	Resistor programmed	3000	0 to 40	24.4	−77/−65	7.5	3	18	3 × 3 QFN 8-lead MSOP	EAR 99	LTC6406CUD#TRPBF LTC6406IUD#TRPBF LTC6406CMS8E#TRPBF LTC6406IMS8E#TRPBF
LT1993-2	Fixed 6 dB gain	800	6	38	−72/−69	12.3	5	100	3 × 3 QFN	EAR 99	LT1993CUD-2#TRPBF LT1993IUD-2#TRPBF
LT1993-4	Fixed 12 dB gain	900	12	40	−76/−70	14.5	5	100	3 × 3 QFN	EAR 99	LT1993CUD-4#TRPBF LT1993IUD-4#TRPBF
LT1993-10	Fixed 20 dB gain	700	20	40	−77/−67	12.7	5	100	3 × 3 QFN	EAR 99	LT1993CUD-10#TRPBF LT1993IUD-10#TRPBF

RF/IF Differential Amplifiers (Continued)

Part Number	Description	Frequency (MHz)	Gain Range (dB)	Output IP3 (dBm)	2 nd /3 rd Harmonic (dBc)	Noise Figure at Max Gain (dB)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
LT1994	R/R output, resistor programmed	70	0 to 40	—	–88/–84	—	3, 5, ±5	14.8	3 × 3 DFN MSOP-8	EAR 99	LT1994CDD#TRPBF LT1994IDD#TRPBF LT1994HDD#TRPBF LT19994MPDD#TRPBF LT19994CMS8#TRPBF LT19994IMS8#TRPBF
LTC6409	Resistor programmed	10000	0 to 52	39	–88/–93	6.9	3, 5	52	3 × 2 QFN	EAR 99	LTC6409CUDB#TRPBF LTC6409IUDB#TRPBF LTC6409HUBD#TRPBF
LTC6419 <i>New</i>	Dual, resistor programmed	10000	0 to 52	33.5	–85/–83	6.9	3, 5	104	4 × 3 LQFN	EAR 99	LTC6419IV#PBF LTC6419HV#PBF
LTC6410-6	Configurable R _N	1400	6	36	–85/–69	8	3, 5	125	3 × 3 QFN	EAR 99	LTC6410CUD-6#TRPBF LTC6410IUD-6#TRPBF
LT6411	Dual selectable gain	650	+1, +2, –1	30	–63/–52	24.7	5, 12	16	3 × 3 QFN	EAR 99	LT6411CUD#TRPBF LT6411IUD#TRPBF
LTC6432A-15 <i>New</i>	Low noise at 100 kHz, fixed gain	0.1 to 1400	15.9	50.3	–92.2/–90	3.2	5	166	4 × 4 QFN	EAR 99	LTC6432AIUF-15#TRPBF
LTC6432B-15 <i>New</i>	Low noise at 100 kHz, fixed gain	0.1 to 1400	15.9	47	–92.2/–90	3.2	5	166	4 × 4 QFN	EAR 99	LTC6432BIUF-15#TRPBF
LTC6430A-15	Fixed 15.2 dB gain	20 to 2000	15.2	50	–80.5/–87	3	5	160	4 × 4 QFN	EAR 99	LTC6430AIUF-15#TRPBF
LTC6430B-15	Fixed 15.2 dB gain	20 to 2000	15.2	47	–80.5/–87	3	5	160	4 × 4 QFN	EAR 99	LTC6430BIUF-15#TRPBF
LTC6430A-20	Fixed 20 dB gain	20 to 2060	20.8	51	–79.8/–80.9	2.9	5	170	4 × 4 QFN	EAR 99	LTC6430AIUF-20#TRPBF
LTC6430B-20	Fixed 20 dB gain	20 to 2060	20.8	47	–79.8/–80.9	2.9	5	170	4 × 4 QFN	EAR 99	LTC6430BIUF-20#TRPBF
LTC6416	Differential buffer with prog output clamp	LF to 2000	0	33.5	–75/–59	6.4	3	42	3 × 2 DFN	EAR 99	LTC6416CDD#TRPBF LTC6416IDD#TRPBF
LTC6417	Differential buffer with fast clamp	LF to 1600	0	45.6	–100/–66	13	5	123	3 × 4 QFN	EAR 99	LTC6417CUDC#TRPBF LTC6417IUDC#TRPBF
LTC6420-20	Dual matched diff amplifiers	DC to 1800	20	37.2	–80/–88	6.2	3	160	3 × 4 QFN	EAR 99	LTC6420CUDC-20#TRPBF LTC6420IUDC-20#TRPBF
LTC6421-20	Dual matched diff amplifiers	DC to 1300	20	33.2	–74/–78	6.2	3	80	3 × 4 QFN	EAR 99	LTC6421CUDC-20#TRPBF LTC6421IUDC-20#TRPBF

Low Noise Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC8410 <i>New</i>	LNA	0.01 to 10	19.5	21.5	33	1.1	Internal	5	65	2 × 2 LFCSP	EAR 99	HMC8410LP2FE
HMC8401 <i>New</i>	LNA	0.01 to 28	14.5	16.5	26	1.5	Internal	7.5	60	Die	EAR 99	HMC8401
HMC549	LNA	0.04 to 0.96	5	12	27	3.5	Internal	5	120	MSOP	EAR 99	HMC549MS8GE
HMC599	LNA	0.05 to 1	14	19	39	2.2	Internal	5	120	SOT-89	EAR 99	HMC599ST89E
HMC639	LNA	0.2 to 4	13	22	38	2.3	Internal	5	110	SOT-89	EAR 99	HMC639ST89E
HMC374	LNA	0.3 to 3	15	22	37	1.5	Internal	5	90	SOT-26	EAR 99	HMC374E
HMC374	LNA	0.3 to 3	15	17	35	1.6	Internal	3.3	75	SC70	EAR 99	HMC374SC70E
HMC356	LNA	0.35 to 0.55	17	21	38	1	External	5	104	3 × 3 LFCSP	EAR 99	HMC356LP3E
HMC8400	LNA	0.2 to 30	13.5	14.5	26.5	2	Internal	5	67	Die	3A001.b.2.d	HMC8400
ADL5521	LNA	0.4 to 4	20.8	22	37	0.9	External	5	60	3 × 3 LFCSP	5A991.b	ADL5521ACPZ-R7
ADL5523	LNA	0.4 to 4	21.5	21	34	0.8	External	5	60	3 × 3 LFCSP	5A991.b	ADL5523ACPZ-R7
HMC373	LNA	0.7 to 1	14	20	35	1	Internal	5	90	3 × 3 LFCSP	EAR 99	HMC373LP3E
HMC376	LNA	0.7 to 1	15	21	36	0.7	Internal	5	73	3 × 3 LFCSP	EAR 99	HMC376LP3E
HMC372	LNA	0.7 to 1	15	21	34	1	External	5	100	3 × 3 LFCSP	EAR 99	HMC372LP3E
HMC753	LNA	1 to 11	17	18	30	1.5	Internal	5	55	4 × 4 LFCSP	EAR 99	HMC753LP4E
HMC-ALH444	LNA	1 to 12	17	19	28	1.5	Internal	5	55	Die	EAR 99	HMC-ALH444
HMC618A	LNA	1.2 to 2.2	19	20	36	0.75	External	5	117	3 × 3 LFCSP	EAR 99	HMC618ALP3E
HMC375	LNA	1.7 to 2.2	17	18	34	0.9	External	5	136	3 × 3 LFCSP	EAR 99	HMC375LP3E
HMC382	LNA	1.7 to 2.2	17	16	30	1	Internal	5	67	3 × 3 LFCSP	EAR 99	HMC382LP3E
HMC772	LNA	2 to 12	15	13	25	1.8	Internal	4	45	4 × 4 LFCSP	EAR 99	HMC772LC4
HMC8402 <i>New</i>	LNA	2 to 30	13.5	21.5	26	2	Internal	7	68	Die	3A001.b.2.d	HMC8402
HMC392A <i>New</i>	LNA	3.5 to 7	17.2	19.5	32.5	1.7	Internal	5	59	Die	EAR 99	HMC392A
HMC392A <i>New</i>	LNA	3.5 to 8	17	19	34.5	1.8	Internal	5	61	4 × 4 LFCSP	EAR 99	HMC392ALC4
HMC717A <i>New</i>	LNA	4.8 to 6	14.5	18	29.5	1.3	External	5	68	3 × 3 LFCSP	EAR 99	HMC717ALP3E
HMC-ALH435	LNA	5 to 20	13	16	25	2.2	Internal	5	30	Die	EAR 99	HMC-ALH435
HMC902	LNA	5 to 10	19	16	28	1.8	Internal	3.5	80	3 × 3 LFCSP	EAR 99	HMC902LP3E
HMC902	LNA	5 to 10	20	16	28	1.6	Internal	3.5	80	Die	EAR 99	HMC902
ADL5721 <i>New</i>	LNA	5.9 to 8.5	25.9	–10.6	4	1.6	Internal	3.3	86.5	2 × 2 LFCSP	EAR 99	ADL5721ACPZN-R7
HMC903	LNA	6 to 17	18	14	25	1.7	Internal	3.5	80	3 × 3 LFCSP	EAR 99	HMC903LP3E
HMC903	LNA	6 to 18	19	15	27	1.6	Internal	3.5	90	Die	EAR 99	HMC903
HMC565	LNA	6 to 20	21	10	20	2.5	Internal	3	53	5 × 5 LFCSP	EAR 99	HMC565LC5
HMC565	LNA	6 to 20	22	10	20	2.3	Internal	3	53	Die	EAR 99	HMC565
HMC963	LNA	6 to 26.5	22	10	18	2.5	Internal	3.5	45	4 × 4 LFCSP	EAR 99	HMC963LC4
HMC564	LNA	7 to 14	17	12	24	1.8	Internal	3	51	Die	EAR 99	HMC564
HMC564	LNA	7 to 14	17	13	25	1.8	Internal	3	51	4 × 4 LFCSP	EAR 99	HMC564LC4

— = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

Low Noise Amplifiers (Continued)

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC962	LNA	7.5 to 26.5	13	13	23	2.5	Internal	3.5	70	4 × 4 LFCSP	EAR 99	HMC962LC4
HMC516	LNA	9 to 18	20	13	25	2	Internal	3	65	5 × 5 LFCSP	EAR 99	HMC516LC5
HMC516	LNA	9 to 18	21	13	20	2	Internal	3	65	Die	EAR 99	HMC516
ADL5723 New	LNA	10.1 to 11.7	24.5	-10	2.2	2.2	Internal	3.3	109.1	2 × 2 LFCSP	EAR 99	ADL5723ACPZN-R7
HMC490	LNA	12 to 17	27	26	35	2	Internal	5	200	Die	EAR 99	HMC490
HMC490	LNA	12 to 16	27	25	35	2.5	Internal	5	200	5 × 5 LFCSP	EAR 99	HMC490LP5E
ADL5724 New	LNA	12.7 to 15.4	26.4	-8	2	2.1	Internal	3.3	109.7	2 × 2 LFCSP	EAR 99	ADL5724ACPZN-R7
HMC342	LNA	13 to 25	20	5	13	3.5	Internal	3	43	Die	EAR 99	HMC342
HMC342	LNA	13 to 25	22	9	20	3.5	Internal	3	43	3 × 3 LFCSP	EAR 99	HMC342LC4
HMC-ALH216	LNA	14 to 27	18	14	—	2.5	Internal	4	90	Die	5A991.h	HMC-ALH216
HMC504	LNA	14 to 27	19.5	17	26	2.2	Internal	4	90	4 × 4 LFCSP	5A991.h	HMC504LC4B
HMC-ALH476	LNA	14 to 27	20	14	—	2	Internal	4	90	Die	5A991.h	HMC-ALH476
HMC517	LNA	17 to 26	19	13	23	2.5	Internal	3	67	4 × 4 LFCSP	EAR 99	HMC517LC4
HMC517	LNA	17 to 26	20	11	23	2	Internal	3	65	Die	EAR 99	HMC517
HMC751	LNA	17 to 27	25	13	25	2.2	Internal	4	73	4 × 4 LCC	EAR 99	HMC751LC4
ADL5725 New	LNA	17.7 to 19.7	27.8	-11.5	-1.5	2.4	Internal	3.3	108	2 × 2 LFCSP	EAR 99	ADL5725ACPZN-R7
HMC-ALH445	LNA	18 to 40	10	12	—	3.9	Internal	5	45	Die	3A001.b.2.d	HMC-ALH445
HMC519	LNA	18 to 31	14.4	11	23	3	Internal	3	75	4 × 4 LFCSP	EAR 99	HMC519LC4
HMC519	LNA	18 to 31	15	14	23	3	Internal	3	75	Die	EAR 99	HMC519
HMC518	LNA	20 to 32	15	12	23	3	Internal	3	65	Die	3A001.b.2.d	HMC518
HMC341	LNA	21 to 29	13	6	16	2.5	Internal	3	30	Die	EAR 99	HMC341
HMC341	LNA	21 to 29	13	8	19	2.5	Internal	3	35	3 × 3 LFCSP	EAR 99	HMC341LC3B
ADL5726 New	LNA	21.2 to 23.6	24.7	-8	1	3.3	Internal	3.3	92.4	2 × 2 LFCSP	EAR 99	ADL5726ACPZN-R7
HMC-ALH311	LNA	22 to 26.5	25	12	—	3	Internal	2.5	54	Die	5A991.h	HMC-ALH311
HMC-ALH140	LNA	24 to 40	11.5	15	—	4	Internal	4	60	Die	3A001.b.2.d	HMC-ALH140
HMC-ALH244	LNA	24 to 40	12	13	—	3.5	Internal	4	45	Die	3A001.b.2.d	HMC-ALH244
HMC263	LNA	24 to 36	20	8	18	2.2	Internal	3	58	3 × 3 LFCSP	3A001.b.2.d	HMC263LP4E
HMC263	LNA	24 to 36	22	8	17	2	Internal	3	58	Die	3A001.b.2.d	HMC263
HMC-ALH364	LNA	24 to 32	21	7	—	2	Internal	5	68	Die	3A001.b.2.d	HMC-ALH364
HMC-ALH369	LNA	24 to 40	22	11	—	2	Internal	5	66	Die	3A001.b.2.d	HMC-ALH369
HMC1040	LNA	24 to 43.5	22	12	22	2.7	Internal	2.5	70	3 × 3 LFCSP	3A001.b.2.d	HMC1040LP3CE
HMC752	LNA	24 to 28	25	13	26	2.5	Internal	3	70	4 × 4 LFCSP	EAR 99	HMC752LC4
HMC-ALH313	LNA	27 to 33	20	12	—	3	Internal	2.5	52	Die	3A001.b.2.d	HMC-ALH313
HMC566	LNA	29 to 36	20	12	24	2.8	Internal	3	80	Die	3A001.b.2.d	HMC566
HMC566	LNA	29 to 36	21	12	24	2.8	Internal	3	82	4 × 4 LFCSP	3A001.b.2.d	HMC566LP4E
HMC-ALH376	LNA	35 to 45	16	6	—	2	Internal	4	87	Die	3A001.b.2.d	HMC-ALH376
HMC-ALH310	LNA	37 to 42	22	12	—	3.5	Internal	2.5	52	Die	3A001.b.2.d	HMC-ALH310
HMC-ALH382	LNA	57 to 65	21	12	—	4	Internal	2.5	64	Die	EAR 99	HMC-ALH382
HMC-ALH508	LNA	71 to 86	13	7	—	5	Internal	2.4	30	Die	EAR 99	HMC-ALH508
HMC-ALH509	LNA	71 to 86	14	7	—	5	Internal	2	50	Die	EAR 99	HMC-ALH509
HMC7950 New	LNA	2 to 28	15	16	26	2	Internal	5	64	3 × 3 LCC	EAR 99	HMC7950LS6
HMC8325 New	LNA	71 to 86	21	13	22	3.6	Internal	3	50	Die	3A001.b.2.g	HMC8325

Gain Blocks and Driver Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC754	Gain block	0 to 1	14.5	21	38	5.5	Internal	5	160	SOIC	EAR 99	HMC754S8GE
ADL5530	Gain block	0 to 1	16.8	22	37	3	Internal	3	110	2 × 3 LFCSP	EAR 99	ADL5530ACPZ-WP
HMC395	Gain block	0 to 4	15	15	28	4.5	Internal	5	54	Die	EAR 99	HMC395
HMC589A	Gain block	0 to 4	21	21	33	4.5	Internal	5	82	SOT-89	EAR 99	HMC589AST89
HMC480	Gain block	0 to 5	19	20	34	2.9	Internal	8	82	SOT-89	EAR 99	HMC480ST89
HMC313	Gain block	0 to 6	17	14	27	6.5	Internal	5	50	SOT-26	EAR 99	HMC313
HMC311	Gain block	0 to 6	15	16	32	5	External	5	55	SOT-89	EAR 99	HMC311ST89E
HMC311	Gain block	0 to 6	14.5	16	32	4.5	External	5	55	3 × 3 LFCSP	EAR 99	HMC311LP3
HMC311	Gain block	0 to 8	15	15	30	5	External	5	55	SC70	EAR 99	HMC311SC70E
HMC396	Gain block	0 to 8	12	14	30	6	Internal	5	56	Die	EAR 99	HMC396
HMC405	Gain block	0 to 10	16	13	25	4	Internal	5	50	Die	EAR 99	HMC405
HMC397	Gain block	0 to 10	15	13	24	4.5	Internal	5	56	Die	EAR 99	HMC397
HMC788A	Gain block	0 to 10	14	20	33	7	Internal	5	76	2 × 2 LFCSP	EAR 99	HMC788ALP2E
HMC3587	Gain block	~0 to 10	14.5	11	25	3.5	Internal	5	44	3 × 3 LFCSP	EAR 99	HMC3587LP3BE
LTC6433A-15	Gain block	0.0001 to 1.4	15.9	19.2	47	3.22	Internal	5	95	4 × 4 QFN	EAR 99	LTC6433AIUF-15#TRPBF
LTC6433B-15	Gain block	0.0001 to 1.4	15.9	19.2	45	3.22	Internal	5	95	4 × 4 QFN	EAR 99	LTC6433BIUF-15#TRPBF
AD8354	Gain block	0.001 to 2.7	20	5	19	4.2	Internal	3	25	2 × 3 LFCSP	EAR 99	AD8354ACPZ-REEL7
AD8353	Gain block	0.001 to 2.7	20	9	24	5.6	Internal	3	42	2 × 3 LFCSP	EAR 99	AD8353ACPZ-REEL7

■ = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

Gain Blocks and Driver Amplifiers (Continued)

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _S (V)	I _{SV} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC3653	Gain block	0.007 to 15	15	15	28	4	Internal	5	44	3 × 3 LFCSP	EAR 99	HMC3653LP3BE
ADL5534	Gain block	0.02 to 0.5	21	20	40	2.5	Internal	5	98	5 × 5 LFCSP	EAR 99	ADL5534ACPZ-R7
ADL5531	Gain block	0.02 to 0.5	20.9	20	41	2.5	Internal	5	100	3 × 3 LFCSP	EAR 99	ADL5531ACPZ-R7
ADL5536	Gain block	0.02 to 1	20	20	45	2.6	Internal	5	105	SOT-89	EAR 99	ADL5536ARKZ-R7
ADL5535	Gain block	0.02 to 1	16	19	46	3.2	Internal	5	97	SOT-89	EAR 99	ADL5535ARKZ-R7
LTC6431A-20	Gain block	0.02 to 1.4	20.8	22	46.2	2.6	Internal	5	93	4 × 4 QFN	EAR 99	LTC6431AIUF-20#TRPBF
LTC6431B-20	Gain block	0.02 to 1.4	20.8	22	45.7	2.6	Internal	5	93	4 × 4 QFN	EAR 99	LTC6431BIUF-20#TRPBF
LTC6431A-15	Gain block	0.02 to 1.7	15.5	20.6	47	3.33	Internal	5	85.1	4 × 4 QFN	EAR 99	LTC6431AIUF-15#TRPBF
LTC6431B-15	Gain block	0.02 to 1.7	15.5	20.6	45.5	3.33	Internal	5	85.1	4 × 4 QFN	EAR 99	LTC6431BIUF-15#TRPBF
ADL5545	Gain block	0.03 to 6	24.1	18	36	2.9	Internal	5	56	SOT-89	EAR 99	ADL5545ARKZ-R7
ADL5544	Gain block	0.03 to 6	17.4	18	35	2.9	Internal	5	55	SOT-89	EAR 99	ADL5544ARKZ-R7
ADL5610	Gain block	0.03 to 6	18.4	21	38	2.1	Internal	5	91	SOT-89	EAR 99	ADL5610ARKZ-R7
ADL5611	Gain block	0.03 to 6	22.1	21	39	2.1	Internal	5	91	SOT-89	EAR 99	ADL5611ARKZ-R7
HMC741	Gain block	0.05 to 3	20	19	42	2.5	Internal	5	96	SOT-89	EAR 99	HMC741ST89E
HMC740	Gain block	0.05 to 3	15	18	40	3.5	Internal	5	88	SOT-89	EAR 99	HMC740ST89E
ADL5601	Gain block	0.05 to 4	15	19	43	3.7	Internal	5	83	SOT-89	EAR 99	ADL5601ARKZ-R7
ADL5602	Gain block	0.05 to 4	19.3	19	42	3.3	Internal	5	89	SOT-89	EAR 99	ADL5602ARKZ-R7
ADL5542	Gain block	0.05 to 6	18.7	18	39	3.2	Internal	5	93	3 × 3 LFCSP	EAR 99	ADL5542ACPZ-R7
ADL5541	Gain block	0.05 to 6	14.7	16	39	3.8	Internal	5	90	3 × 3 LFCSP	EAR 99	ADL5541ACPZ-R7
HMC636	Gain block	0.2 to 4	13	22	40	2.2	Internal	5	155	SOT-89	EAR 99	HMC636ST89
ADL5320	Driver amp	0.4 to 2.7	13.2	26	42	4.4	External	3.3	47	SOT-89	EAR 99	ADL5320ARKZ-R7
ADL5324	Driver amp	0.4 to 4	14	29	44	3.5	External	3.3	60	SOT-89	EAR 99	ADL5324ARKZ-R7
ADL5605	Driver amp	0.7 to 1	23	31	44	4.8	External	5	307	4 × 4 LFCSP	EAR 99	ADL5605ACPZ-R7
ADL5604	Driver amp	0.7 to 2.7	12.2	29	42	4.6	External	5	318	4 × 4 LFCSP	EAR 99	ADL5604ACPZ-R7
HMC789	Driver amp	0.7 to 2.8	18	25	42	3.8	External	5	125	SOT-89	EAR 99	HMC789ST89E
ADL5606	Driver amp	1.8 to 2.7	24.3	31	46	4.7	External	5	362	4 × 4 LFCSP	EAR 99	ADL5606ACPZ-R7
ADL5321	Driver amp	2.3 to 4	14	26	41	4	External	3.3	37	SOT-89	EAR 99	ADL5321ARKZ-R7
HMC326	Driver amp	3 to 4.5	21	24	36	5	Internal	5	130	MSOP	EAR 99	HMC326MS8G

Wideband Distributed Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _S (V)	I _{SV} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC637A	Distributed	0 to 6	13	29	44	5	Internal	12	400	5 × 5 LFCSP	EAR 99	HMC637ALP5E
New HMC637A	Distributed	0 to 6	13	29	44	5	Internal	12	400	Die	EAR 99	HMC637A
HMC659	Distributed	0 to 15	19	27	35	2	Internal	8	300	Die	EAR 99	HMC659
HMC659	Distributed	0 to 15	19	28	35	2.5	Internal	8	300	5 × 5 LFCSP	EAR 99	HMC659LC5
HMC459	Distributed	0 to 18	17	25	32	3	Internal	8	290	Die	EAR 99	HMC459
HMC559	Distributed	0 to 20	14	28	36	4	Internal	10	400	Die	EAR 99	HMC559
HMC460	Distributed	0 to 20	14	16	29	2.5	Internal	8	75	Die	EAR 99	HMC460
HMC460	Distributed	0 to 20	14	17	30	2.5	Internal	8	75	5 × 5 LFCSP	EAR 99	HMC460LC5
HMC465	Distributed	0 to 20	17	22	30	2.5	Internal	8	160	Die	EAR 99	HMC465
HMC465	Distributed	0 to 20	15	23	28	3	Internal	8	160	5 × 5 LFCSP	EAR 99	HMC465LP5
New HMC930A	Distributed	0 to 40	13	22	33.5	4.5	Internal	10	175	Die	3A001.b.2.d	HMC930A
HMC-AUH249	Distributed	0 to 35	15	21	—	—	Internal	5	200	Die	3A001.b.2.d	HMC-AUH249
HMC-AUH232	Distributed	0 to 45	14	17	—	4.2	Internal	5	180	Die	3A001.b.2.d	HMC-AUH232
New HMC5805A	Distributed	0 to 40	13.5	24.5	29	4.5	Internal	10	175	6 × 6 LFCSP	3A001.b.2.d	HMC5805ALS6
HMC6980	Distributed	0.01 to 20	12	28	28	4.5	Internal	12	345	—	3A001.b.2.d	—
Upcoming HMC998A	Distributed	0.1 to 22	12	31	41	4.5	Internal	5	500	Die	—	HMC998A
HMC1049	LNA, distributed	0.3 to 19	16	15	27	1.7	Internal	7	70	Die	EAR 99	HMC1049
HMC1049	LNA, distributed	0.3 to 20	15	15	29	1.8	Internal	7	70	5 × 5 LFCSP	EAR 99	HMC1049LP5E
HMC-AUH312	Distributed	0.5 to 65	10	—	—	—	Internal	8	60	Die	3A001.b.2.f	HMC-AUH312
HMC606	Low phase noise	2 to 18	12.5	13	22	7	Internal	—	64	Die	EAR 99	HMC606
HMC606	Low phase noise	2 to 18	13.5	15	—	—	—	—	—	5 × 5 LFCSP	EAR 99	HMC606LC5
HMC-ALH482	LNA, distributed	2 to 20	16	14	—	1.7	Internal	4	45	Die	EAR 99	HMC-ALH482
HMC-ALH102	Distributed	2 to 20	10	10	—	2.5	Internal	2	55	Die	EAR 99	HMC-ALH102
HMC464	Distributed	2 to 20	16	26	30	4	Internal	8	290	Die	EAR 99	HMC464
HMC464	Distributed	2 to 20	14	26	30	4	Internal	8	290	5 × 5 LFCSP	EAR 99	HMC464LP5E
HMC463	Distributed	2 to 20	14	16	28	2.5	Internal	5	60	Die	EAR 99	HMC463

— = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

Wideband Distributed Amplifiers (Continued)

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _s (V)	I _{SV} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC463	Distributed	2 to 20	13	18	26	3	Internal	5	60	5 × 5 LFCSP	EAR 99	HMC463LP5
HMC463	Distributed	2 to 20	14	18	28	2.5	Internal	5	60	LFCSP	EAR 99	HMC463LH250
HMC462	Distributed	2 to 20	15	15	27	2.5	Internal	5	63	Die	EAR 99	HMC462
HMC462	Distributed	2 to 20	13	14	25	2.5	Internal	5	66	5 × 5 LFCSP	EAR 99	HMC462LP5
HMC562	Distributed	2 to 35	12.5	18	27	3	Internal	8	80	Die	3A001.b.2.d	HMC562
HMC1127	Distributed	2 to 50	14	12	22	—	—	5	65	Die	3A001.b.2.d	HMC1127
HMC1126	Distributed	2 to 50	11	15	28	—	—	5	66	Die	3A001.b.2.d	HMC1126
HMC633	Distributed	5 to 17	29	23	30	8	Internal	5	180	Die	EAR 99	HMC633
HMC634	Distributed	5 to 20	22	23	31	7.5	Internal	5	180	Die	EAR 99	HMC634
HMC634	Distributed	5 to 20	21	22	29	7.5	Internal	5	180	4 × 4 LFCSP	EAR 99	HMC634LC4
HMC633	Distributed	5.5 to 17	30	23	30	8	Internal	5	180	4 × 4 LFCSP	EAR 99	HMC633LC4
HMC635	Distributed	18 to 40	19.5	23	29	8	Internal	5	280	Die	3A001.b.2.d	HMC635
HMC635	Distributed	18 to 40	18.5	22	27	8	Internal	5	280	4 × 4 LFCSP	3A001.b.2.d	HMC635LC4

Linear and Power Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _s (V)	I _{SV} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC453	Power amp	0.4 to 2.2	22	33	50	6.5	External	5	725	QSOP	EAR 99	HMC453QS16GE
HMC452	Power amp	0.4 to 2.2	21	30	49	7.5	External	5	510	SOT-89	EAR 99	HMC452ST89
HMC452	Power amp	0.4 to 2.2	23	30	48	7	External	5	485	QSOP	EAR 99	HMC452QS16GE
HMC454	Power amp	0.4 to 2.5	13	27	42	6	External	5	150	SOT-89	EAR 99	HMC454ST89
HMC453	Power amp	0.45 to 2.2	21	32	49	6.5	External	5	725	SOT-89	EAR 99	HMC453ST89
HMC450	Driver amp	0.8 to 1	26	26	40	8	External	5	310	QSOP	EAR 99	HMC450QS16GE
HMC413	Power amp	1.6 to 2.2	22	27	40	5.5	External	3.6	270	QSOP	EAR 99	HMC413QS16GE
HMC457	Power amp	1.7 to 2.2	27	31	46	5	External	5	500	QSOP	EAR 99	HMC457QS16G
HMC461	Power amp	1.7 to 2.2	12	30	45	6	External	5	300	3 × 3 LFCSP	EAR 99	HMC461LP3E
HMC455	Power amp	1.7 to 2.5	13	27	42	—	External	5	150	3 × 3 LFCSP	EAR 99	HMC455LP3E
HMC414	Power amp	2.2 to 2.8	20	27	39	—	External	5	300	MSOP	EAR 99	HMC414MS8GE
HMC327	Power amp	3 to 4	21	27	40	5	Internal	5	250	MSOP	EAR 99	HMC327MS8GE
HMC409	Power amp	3.3 to 3.8	31	31	46	5.8	External	5	615	3 × 3 LFCSP	EAR 99	HMC409LP4E
HMC415	Driver amp	4.9 to 5.9	20	22	32	6	External	3	285	3 × 3 LFCSP	EAR 99	HMC415LP3E
HMC406	Driver amp	5 to 6	18	26	38	6	External	5	300	MSOP	EAR 99	HMC406MS8GE
HMC407	Driver amp	5 to 7	15	25	40	5.5	Internal	5	230	MSOP	EAR 99	HMC407MS8GE
HMC451	Driver amp	5 to 20	22	20	30	—	Internal	5	127	Die	EAR 99	HMC451
HMC451	Driver amp	5 to 20	18	20	28	7	Internal	5	120	3 × 3 QFN	EAR 99	HMC451LP3E
HMC451	Driver amp	5 to 20	19	19	30	7	Internal	5	114	3 × 3 QFN	EAR 99	HMC451LC3
HMC408	Power amp	5.1 to 5.9	20	30	43	6	External	5	750	3 × 3 QFN	EAR 99	HMC408LP3E
HMC7357	Power amp	5.5 to 8.5	29	35	42	—	Internal	8	1200	4 × 4 QFN	EAR 99	HMC7357LP5GE
HMC1121 New	Power amp	5.5 to 7.5	27	36	44	—	Internal	7.5	2200	6 × 6 LFCSP	3A001.b.2.d	HMC1121LP6GE
HMC1082	Driver amp	5.5 to 18	22	24	35	—	Internal	5	220	4 × 4 QFN	EAR 99	HMC1082LP4E
HMC591	Power amp	6 to 9.5	18	33	41	—	Internal	7	1340	5 × 5 QFN	EAR 99	HMC591LP5E
HMC591	Power amp	6 to 10	23	33	43	—	Internal	7	1340	Die	EAR 99	HMC591
HMC590	Power amp	6 to 10	25	32	41	—	Internal	7	820	Die	EAR 99	HMC590
HMC590	Power amp	6 to 10	21	31	40	—	Internal	7	820	5 × 5 QFN	EAR 99	HMC590LP5E
HMC441	Driver amp	6 to 18	16	20	32	4.5	Internal	5	95	Die	EAR 99	HMC441
HMC441	Driver amp	6 to 18	17	20	32	4.5	Internal	5	95	3 × 3 QFN	EAR 99	HMC441LC3B
HMC441	Driver amp	6.5 to 13.5	14	18	29	4.5	Internal	5	95	3 × 3 QFN	EAR 99	HMC441LP3
HMC441	Driver amp	7 to 15.5	15	20	32	4.8	Internal	5	90	5 × 5 LFCSP	EAR 99	HMC441LH5
HMC487	Power amp	9 to 12	20	32	36	8	Internal	7	1300	5 × 5 QFN	EAR 99	HMC487LP5E
HMC952A New	Power amp	9 to 14	33	36	43	—	Internal	6	1400	5 × 5 LFCSP	EAR 99	HMC952ALP5GE
HMC608	Driver amp	9.5 to 11.5	29	27	33	6	Internal	5	310	4 × 4 QFN	EAR 99	HMC608LC4
HMC383	Driver amp	12 to 30	16	16	25	7	Internal	5	100	Die	EAR 99	HMC383
HMC383	Driver amp	12 to 30	15	17	25	7.5	Internal	5	100	4 × 4 QFN	EAR 99	HMC383LC4
HMC6981	Power amp	15 to 20	26	34	44	—	External	6	1100	6 × 6 LFCSP	EAR 99	HMC6981LS6
HMC-APH462	Power amp	15 to 27	17	29	37	—	Internal	5	1440	6 × 6 QFN	EAR 99	HMC-APH462
HMC-APH596	Driver amp	16 to 33	17	24	33	—	Internal	5	400	Die	5A991.h	HMC-APH596
HMC498	Driver amp	17 to 24	24	25	34	—	Internal	5	250	Die	EAR 99	HMC498
HMC498	Driver amp	17 to 24	22	25	36	4	Internal	5	250	4 × 4 QFN	EAR 99	HMC498LC4
HMC-APH196	Driver amp	17 to 30	20	24	31	—	Internal	5	400	Die	EAR 99	HMC-APH196
HMC442	Driver amp	17.5 to 24	14	22	28	6.5	Internal	5	85	1.35 LCC	EAR 99	HMC442LM1
HMC442	Driver amp	17.5 to 25.5	15	22	28	5.5	Internal	5	84	Die	EAR 99	HMC442
HMC442	Driver amp	17.5 to 25.5	13	22	27	8	Internal	5	84	3 × 3 QFN	EAR 99	HMC442LC3B
HMC-AUH256	Driver amp	17.5 to 41	21	20	27	—	Internal	5	295	Die	3A001.b.2.d	HMC-AUH256
HMC-APH478	Power amp	18 to 20	18	30	39	—	Internal	5	900	Die	3A001.b.2.d	HMC-APH478
HMC-APH518	Power amp	21 to 24	17	31	39	—	Internal	5	950	Die	3A001.b.2.c	HMC-APH518
HMC499	Driver amp	21 to 32	16	24	33	—	Internal	5	200	Die	3A001.b.2.d	HMC499
HMC499	Driver amp	21 to 32	17	23	34	5	Internal	5	200	4 × 4 QFN	3A001.b.2.d	HMC499LC4

Linear and Power Amplifiers (Continued)

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC-APH608	Power amp	22.5 to 26.5	17	30	38	—	Internal	5	950	Die	EAR 99	HMC-APH608
HMC943A Upcoming	Power amp	24 to 31.5	21	32	41	—	Internal	5.5	1200	5 × 5 LFCSP	3A001.b.2.d	HMC943ALP5DE
HMC1131	Driver amp	24 to 35	22	24	35	—	Internal	5	225	4 × 4 LFCSP	3A001.b.2.d	HMC1131LC4
HMC-APH460	Power amp	27 to 31.5	14	28	37	—	Internal	5	900	Die	EAR 99	HMC-APH460
HMC1132 New	Power amp	27 to 32	22	30	35	—	Internal	6	600	5 × 5 LFCSP	3A001.b.2.d	HMC1132LP5DE
HMC7441	Power amp	27.5 to 31.5	23	34	38	—	Internal	6	1000	Die	3A001.b.2.d	HMC7441
HMC-ABH264	Driver amp	34 to 42	19	18	29	6.5	Internal	5	120	Die	3A001.b.2.d	HMC-ABH264
HMC7229 New	Power amp	37 to 40	24	32	40	—	Internal	6	1200	6 × 6 LFCSP	3A001.b.2.d	HMC7229LS6
HMC-APH510	Driver amp	37 to 40	20	26	35	—	Internal	5	640	Die	3A001.b.2.d	HMC-APH510
HMC-APH473	Power amp	37 to 40	15	28	37	—	Internal	5	1080	Die	3A001.b.2.d	HMC-APH473
HMC-APH403	Driver amp	37 to 45	21	23	32	—	Internal	5	475	Die	3A001.b.2.f	HMC-APH403
HMC1144	Driver amp	40 to 70	19	21	28	—	Internal	4	320	Die	3A001.b.2.f	HMC1144
HMC-ABH241	Driver amp	50 to 66	24	17	25	—	Internal	5	220	Die	3A001.b.2.f	HMC-ABH241
HMC-ABH209	Driver amp	55 to 65	13	16	25	—	Internal	5	80	Die	3A001.b.2.f	HMC-ABH209
HMC-AUH318	Driver amp	71 to 76	24	18	—	—	Internal	4	130	Die	3A001.b.2.g	HMC-AUH318
HMC-APH633	Driver amp	71 to 76	13	20	—	—	Internal	4	240	Die	3A001.b.2.g	HMC-APH633
HMC-AUH320	Driver amp	71 to 86	15	15	—	—	Internal	4	130	Die	3A001.b.2.f	HMC-AUH320
HMC-AUH317	Driver amp	81 to 86	22	18	—	—	Internal	4	160	Die	3A001.b.2.g	HMC-AUH317
HMC-APH634	Driver amp	81 to 86	12	19	—	—	Internal	4	240	Die	3A001.b.2.g	HMC-APH634

GaN Power Amplifiers

Part Number	Description	Frequency (GHz)	Gain (dB)	Output P1dB (dBm)	Output IP3 (dBm)	Noise Figure (dB)	Device Match	P _{SAT} (dBm)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC1099	10 W, GaN PA	0.01 to 1.1	19	40	49	18.5	Internal	40.5	28	100	5 × 5 QFN	EAR 99	HMC1099LP5DE
HMC8500 New	>10 W, GaN PA	0.01 to 2.8	16	40	48	5	Internal	41	28	100	5 × 5 LFCSP	EAR 99	HMC8500LP5DE
HMC1114 New	10 W, GaN PA	2.7 to 3.8	25.5	41	44	14	Internal	41.5	28	150	5 × 5 LFCSP	3A001.b.2.a.4	HMC1114LP5DE
HMC7149	10 W, GaN PA	6 to 18	19	35	39.5	10	Internal	40	28	680	Die	3A001.b.2.c	HMC7149
HMC1087	8 W, GaN PA	2 to 20	11	38	44	5.5	Internal	39	28	850	Die	3A001.b.2.c	HMC1087
HMC1087	8 W, GaN PA	2 to 20	11	38	44	5.5	Internal	39	28	850	Flange	3A001.b.2.c	HMC1087F10
HMC1086	25 W, GaN PA	2 to 6	22	41	48	14	Internal	44.5	28	1100	Die	3A001.b.2.a.4	HMC1086
HMC1086	25 W, GaN PA	2 to 6	22	41	46	14	Internal	44.5	28	1100	Flange	3A001.b.2.a.4	HMC1086F10

Active Bias Controllers

Part Number	Description	V _{SUPPLY} (V)	V _{SUPPLY} Drain (V)	I _{DRAIN} (mA)	I _{GATE} Drive (mA)	V _{GATE} (V)	Over/Under I _{DRAIN} Alarm	Low V _{SUPPLY} Alarm	Package (mm)	ECCN Code	Ordering Part Number
HMC920	Active bias controller	5 to 16.5	3 to 15	0 to 500	−4 to +4	−2.5 to +2	Yes	Yes	5 × 5 LFCSP	EAR 99	HMC920LP5E
HMC980	Active bias controller	5 to 16.5	5 to 16.5	0.05 to 1.6	−4 to +4	−2.46 to +2.04	Yes	No	Die	EAR 99	HMC980
HMC980	Active bias controller	5 to 16.5	5 to 16.5	0.05 to 1.6	−4 to +4	−2.46 to +2.04	Yes	No	4 × 4 LFCSP	EAR 99	HMC980LP4E
HMC981	Active bias controller	4 to 12	4 to 12	20 to 200	−0.8 to +0.8	−2.5 to +2	No	No	Die	EAR 99	HMC981
HMC981	Active bias controller	4 to 12	4 to 12	20 to 200	−0.8 to +0.8	−2.5 to +2	No	No	3 × 3 LFCSP	EAR 99	HMC981LP3E

HMC1099: 10 W GaN Power Amplifier; 0.01 GHz to 1.1 GHz

Key Features

- ▶ Wide instantaneous bandwidth: 0.01 GHz to 1.1 GHz
- ▶ High saturated output power (P_{SAT}): 40.5 dBm typical
- ▶ Gain flatness of 25 dB
- ▶ High small signal gain: 18.5 dB typical
- ▶ High power added efficiency (PAE): 69% typical
- ▶ Supply voltage: $V_{DD} = 28$ V at 100 mA
- ▶ Internal prematching
- ▶ 32-lead, 5 mm × 5 mm, LFCSP package: 25 mm²


Benefits

- ▶ Simplifies circuit layout—compact external tuning for optimal performance
- ▶ Minimizes power consumption and self heating while extending battery life for portable applications

Common Applications

- ▶ Long battery life portable radios for public safety and military
- ▶ High power, phased array commercial and military radars
- ▶ Wide instantaneous bandwidth test and measurement equipment
- ▶ Power amplifier stage for wireless infrastructure

Frequency Range	Gain Flatness	Noise Figure	Temperature Range	Package	Price @ 1k (\$U.S.)
20 MHz to 1.1 GHz	±0.25 dB	5.5 dB @ 1 GHz	−40°C to +85°C	LFCSP	77.00

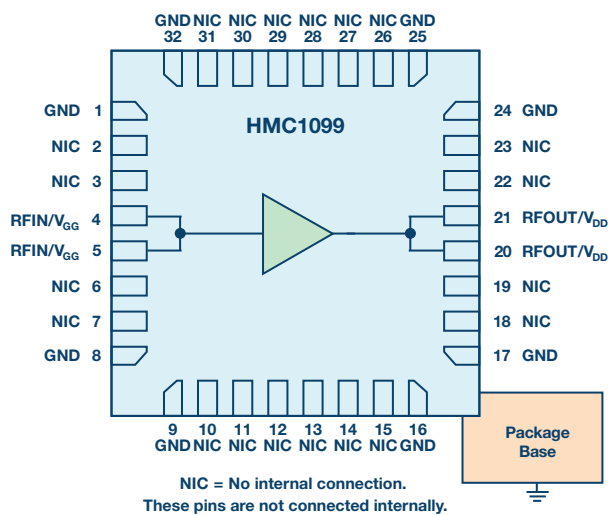

Variable Gain Amplifiers

Analog Controlled VGAs

Part Number	Description	Bandwidth (GHz)	Gain Range (dB)	Output IP3 (dBm)	Noise Figure (dB)	V _s (V)	I _s (mA)	Package (mm)	ECCN Code	Ordering Part Number
AD8367	Single-ended, with AGC	LF to 0.5	−2.5 to +42.5	36.5	6.2	3 to 5	26	TSSOP	EAR 99	AD8367ARUZ
AD8368	Single-ended, with AGC	LF to 0.8	−12 to +22	34	9.5	5	60	4 × 4 LFCSP	EAR 99	AD8368ACPZ-REEL7
LTC6412	Analog VGA	LF to 0.8	−14.9 to +17.1	38	10	3.3	110	4 × 4 QFN	EAR 99	LTC6412CUF#TRPBF LTC6412IUF#TRPBF
ADL5336	Cascadable, with programmable rms detector	LF to 1	−25.4 to +34.7	28	7.1	5	80	5 × 5 LFCSP	5A991.g	ADL5336ACPZ-R7
ADL5331	Differential Tx VGA	LF to 1.2	—	47	9	5	240	4 × 4 LFCSP	EAR 99	ADL5331ACPZ-R7
ADL5330	Differential Tx VGA	LF to 3	−32 to +21	31.5	9	5	215	4 × 4 LFCSP	EAR 99	ADL5330ACPZ-R2
ADL5246	Variable gain LNA/driver amp	0.6 to 3	−12 to +31.5	37	1.8	3.3, 5	141, 270	5 × 5 LFCSP	5A991.b	ADL5246ACPZN-R7
HMC996	Analog VGA	5 to 12	−3.5 to +18.5	34	2	5	120	4 × 4 LFCSP	EAR 99	HMC996LP4E
HMC694	Analog VGA	6 to 17	0 to +23	30	5	5	170	Die	EAR 99	HMC694
HMC694	Analog VGA	6 to 17	0 to +23	30	6	5	170	4 × 4 LFCSP	EAR 99	HMC694LP4E
HMC997	Analog VGA	17 to 27	+5.5 to +20.5	30	3.5	5	170	4 × 4 LFCSP	EAR 99	HMC997LC4
HMC6187	Analog VGA	27 to 31.5	+6 to +19	31	4.5	5	230	4 × 4 LFCSP	3A001.b.2.d	HMC6187LP4E
HMC8120	Analog VGA/driver amp	71 to 76	+15	30	—	4	250	Die	5A991.b	HMC8120
HMC8121	Analog VGA/driver amp	81 to 86	+17	27.5	—	4	265	Die	5A991.b	HMC8121

Digitally Controlled VGAs

Part Number	Description	Bandwidth (GHz)	Gain Range (dB)	Step (dB)	Output IP3 (dBm)	Noise Figure (dB)	V _s (V)	I _s (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC960	Programmable, dual	LF to 0.13	0 to +40	0.5	30	6	5	70	4 × 4 LFCSP	EAR 99	HMC960LP4E
AD8372	Dual-channel diff VGA with serial/parallel control	0 to 0.1	−9 to +32	1	35	7.9	5	2 × 106	5 × 5 LFCSP	EAR 99	AD8372ACPZ-R7
LT5524	Diff VGA with parallel control	LF to 0.54	+4.5 to +27	1.5	40	8.6	5	75	20-lead TSSOP	EAR 99	LT5524EFE#TRPBF
AD8366	Diff VGA	LF to 0.6	+4.5 to +20.25	0.25	45	11.4	5	2 × 90	5 × 5 LFCSP	EAR 99	AD8366ACPZ-R7
AD8369	Diff VGA	LF to 0.63	−5 to +40	3	19.5	7	3 to 5	37	TSSOP	EAR 99	AD8369ARUZ
AD8375	Dual diff VGA	LF to 0.7	−4 to +20	1	50	8.3	5	125	4 × 4 LFCSP	EAR 99	AD8375ACPZ-R7
AD8376	Diff VGA parallel/serial control	LF to 0.8	−4 to +20	1	50	8.7	5	2 × 125	5 × 5 LFCSP	EAR 99	AD8376ACPZ-R7
ADL5201	Dual diff VGA parallel/serial control	LF to 0.9	−11.5 to +20	0.5	50	7.5	5	110	4 × 4 LFCSP	EAR 99	ADL5201ACPZ-R7
LT5514	Diff VGA with parallel control	LF to 0.85	+10.5 to +33	1.5	47	7.4	5	148	20-lead TSSOP	EAR 99	LT5514EFE#TRPBF
ADL5202	Diff VGA	LF to 0.75	−11.5 to +20	0.5	50	7.5	5	2 × 110	6 × 6 LFCSP	EAR 99	ADL5202ACPZ-R7
AD8370	5-bit diff VGA	0.03 to 0.4	−8 to +34	Variable	35	7.2	3 to 5	79	TSSOP	EAR 99	AD8370AREZ
LT5554	Diff VGA with parallel control	LF to 1	+1.725 to +17.6	0.125	47	10	5	110	5 × 5 QFN	EAR 99	LT5554IUH#TRPBF
HMC680	Dual VGA	LF to 0.6	−4 to +19	1	40	5	5	250	4 × 4 LFCSP	EAR 99	HMC680LP4E
HMC628	5-bit VGA	0.05 to 0.8	−8 to +15	1	35	5	5	65	4 × 4 LFCSP	EAR 99	HMC628LP4E
HMC681A	6-bit VGA serial control	0 to 1	+13.5 to +45	0.5	36	2.7	5	176	5 × 5 LFCSP	EAR 99	HMC681ALP5E
HMC625B New	Gain block/VGA/driver amp parallel/serial control	0 to 5	−13.5 to +18	0.5	33	6	5	87.5	5 × 5 LFCSP	EAR 99	HMC625BLP5E
ADL5240	Gain block/VGA parallel/serial control	0.1 to 4	−13.1 to +18	0.5	38	4.9	5	93	5 × 5 LFCSP	5A991.b	ADL5240ACPZ-R7
ADL5243	Gain block/VGA/driver amp parallel/serial control	0.1 to 4	−1.2 to +31.3	0.5	40	3.1	5	175.5	5 × 5 LFCSP	5A991.b	ADL5243ACPZ-R7
HMC742A	6-bit VGA serial/parallel control	0.5 to 4	−19.5 to +12	0.5	39	4	5	150	5 × 5 LFCSP	EAR 99	HMC742ALP5E

Baseband Programmable VGA Filters

Part Number	Description	Bandwidth (MHz)	Gain Range (dB)	Output IP3 (dBm)	Noise Figure (dB)	V _s (V)	I _s (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADRF6516	Dual, with variable LPF	LF to 31	−5 to +45	40	25	3.3	360	5 × 5 LFCSP	EAR 99	ADRF6516ACPZ-R7
ADRF6510	Dual, with variable LPF	LF to 31	−5 to +45	27	28	5	258	5 × 5 LFCSP	EAR 99	ADRF6510ACPZ-R7
AD8366	Dual	LF to 600	+4.5 to +20.25	38	11.4	5	180	5 × 5 LFCSP	EAR 99	AD8366ACPZ-R7
ADRF6518	Dual, with variable LPF	LF to 1100	−36 to +66	36	16	3.3	360	5 × 5 LFCSP	EAR 99	ADRF6518ACPZ-R7
HMC900	Dual, with programmable LPF	3.5 to 50	0/+10	30	12	5	130	5 × 5 LFCSP	EAR 99	HMC900LP5E
HMC1023	Dual, with programmable LPF	5 to 72	0/+10	30	10	5	240	5 × 5 LFCSP	EAR 99	HMC1023LP5E
ADRF6520 New	Dual, with selectable LPF for E-band	LF to 1250	−6 to +54	27 dBV	11	3.3	420	5 × 5 LFCSP	5A991.b	ADRF6520ACPZ-R7

Attenuators

Digital Step Attenuators

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Attenuation Range (dB)	Step (dB)	Input IP3 (dBm)	P0.1 dB (dBm)	Control Input (V _{cc})	Package (mm)	ECCN Code	Ordering Part Number
HMC802A	1-bit DSA	0 to 10	1.5	1.5 to 20	20	55	30	0/+5	3 × 3 LFCSP	EAR 99	HMC802ALP3E
HMC291S <i>New</i>	2-bit DSA	0.7 to 4	0.9	0.7 to 12.7	4	54	26	—	SOT-26	EAR 99	HMC291SE
HMC468A	3-bit DSA	0 to 6	0.7	0.7 to 7.7	1	55	26	0/+5	3 × 3 LFCSP	EAR 99	HMC468ALP3E
HMC629A <i>New</i>	4-bit serial/parallel DSA	0 to 6	2.5	3 to 45	3	50	—	0/+5	4 × 4 LFCSP	EAR 99	HMC629ALP4E
HMC540S	4-bit parallel DSA	0.1 to 8	0.8	0.7 to 15.7	1	54	31	+3.3 to +5	3 × 3 LFCSP	EAR 99	HMC540SLP3E
HMC470A <i>New</i>	5-bit DSA	0 to 3	1.7	1.3 to 32.3	1	48	27	0/+5	3 × 3 LFCSP	EAR 99	HMC470ALP3E
HMC539A <i>New</i>	5-bit DSA	0 to 4	1	0.7 to 8.45	0.25	50	28	0/+5	3 × 3 LFCSP	EAR 99	HMC539ALP3E
HMC1019A <i>New</i>	5-bit DSA	0.1 to 30	4	0.5 to 15.5	0.5	45	25	0/+5	4 × 4 LFCSP	EAR 99	HMC1019ALP4E
HMC1018A <i>New</i>	5-bit DSA	0.1 to 30	5.5	4.5 to 35.5	1	42	22	0/+5	4 × 4 LFCSP	EAR 99	HMC1018ALP4E
HMC941A <i>New</i>	5-bit DSA	0.1 to 30	4	2.5 to 18	0.5	43	24	0/+5	Die	EAR 99	HMC941A
HMC941A <i>New</i>	5-bit DSA	0.1 to 30	4	2.5 to 18	0.5	43	24	0/+5	4 × 4 LFCSP	EAR 99	HMC941ALP4E
HMC939A <i>New</i>	5-bit DSA	0.1 to 33	5.5	1 to 31	1	43	23	0/+5	4 × 4 LFCSP	EAR 99	HMC939ALP4E
HMC939A <i>New</i>	5-bit DSA	0.1 to 40	4.2	4 to 34	1	43	23	0/+5	Die	EAR 99	HMC939A
HMC273A	5-bit DSA	0.7 to 3.7	2.8	1.9 to 32.9	1	48	—	+3.3 to +5	MSOP	EAR 99	HMC273AMS10GE
HMC306A	5-bit DSA	0.7 to 3.8	1.5	1.3 to 16.8	0.5	52	25	+3.3 to +5	MSOP	EAR 99	HMC306AMS10GE
HMC305S	5-bit, glitch free DSA	0.4 to 7	1.4	1.3 to 17	0.5	52	28	+3.3 to +5	4 × 4 LFCSP	EAR 99	HMC305SLP4E
HMC472A	6-bit DSA	0 to 3.8	1.7	1.4 to 32.9	0.5	54	30	0/+5	4 × 4 LFCSP	EAR 99	HMC472ALP4E
HMC424A	6-bit DSA	0 to 13	3.3	3.4 to 34.4	0.5	42	24	0/-5	Die	EAR 99	HMC424A
HMC424A	6-bit DSA	0 to 13	3.3	3.3 to 35.5	0.5	42	23	0/-5	3 × 3 QFN	EAR 99	HMC424ALP3E
HMC424A <i>New</i>	6-bit DSA	0.1 to 13	3.3	3.3 to 34.3	0.5	42	23	0/-5	5 × 5 QFN	EAR99	HMC424ALH5
HMC424A <i>New</i>	6-bit DSA	0.1 to 3	3	3 to 34.5	0.5	42	23	0/-5	MSOP	EAR99	HMC424AG16
HMC1122	6-bit DSA	0.1 to 6	1.2	1.3 to 33	0.5	55	30	+3.3 to +5	4 × 4 LFCSP	EAR 99	HMC1122LP4ME
HMC425A <i>Upcoming</i>	6-bit DSA	2.2 to 8	3.6	0.5 to 31.5	0.5	40	21	0/+5	3 × 3 LFCSP	EAR 99	HMC425ALP3E
HMC542B	6-bit serial DSA	0 to 4	1.7	1.4 to 32.9	0.5	50	30	0/+5	4 × 4 LFCSP	EAR 99	HMC542BLP4E
HMC792A	6-bit serial DSA	0 to 6	1.8	1.8 to 17.5	0.25	53	31	0/+5	4 × 4 LFCSP	EAR 99	HMC792ALP4E
HMC624A	6-bit serial/parallel DSA	0 to 6	2.2	1.5 to 33	0.5	55	30	0/+5	4 × 4 LFCSP	EAR 99	HMC624ALP4E
HMC1095	6-bit DSA	0 to 3	1.3	1.3 to 32.8	0.5	57	30	0/+5	4 × 4 LFCSP	EAR 99	HMC1095LP4E
HMC759	7-bit serial DSA	0.01 to 0.3	3.3	3.3 to 35	0.25	40	—	0/+5	3 × 3 LFCSP	EAR 99	HMC759LP3E
HMC1119 <i>New</i>	7-bit serial/parallel DSA	0.1 to 6	1.5	1.3 to 33.5	0.25	54	30	+3.3 to +5	4 × 4 LFCSP	EAR 99	HMC1119LP4ME

Voltage Variable Attenuators

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Attenuation Range (dB)	Input IP3 (dBm)	Control Input (V _{cc})	Package (mm)	ECCN Code	Ordering Part Number
HMC973A <i>New</i>	Analog VVA	0.5 to 6	3.5	3.5 to 29.5	35	0 to +5	3 × 3 LFCSP	EAR99	HMC973ALP3E
HMC346A <i>Upcoming</i>	Analog VVA	0.1 to 8	1.5	1.5 to 31.5	25	0 to -5	MSOP	EAR99	HMC346AMS8GE
HMC346A <i>Upcoming</i>	Analog VVA	0.1 to 14	1.7	1.7 to 31.7	25	0 to -5	3 × 3 LFCSP	EAR99	HMC346ALP3E
HMC712A <i>Upcoming</i>	Analog VVA	5 to 26.5	3.5	3.5 to 31.5	32	0 to -5	3 × 3 LFCSP	EAR99	HMC712ALP3CE
HMC812A <i>Upcoming</i>	Analog VVA	5 to 30	3	3 to 33	28	0 to -5	4 × 4 LFCSP	EAR99	HMC812ALC4
HMC985A <i>Upcoming</i>	Analog VVA	10 to 40	3	3 to 33	33	0 to -3	4 × 4 LFCSP	EAR99	HMC985ALP4KE
HMC-VVD102	Analog VVA	17 to 27	1.5	1.5 to 19.5	17	-4 V to +4 V	Die	5A991.h	HMC-VVD102
HMC985A <i>Upcoming</i>	Analog VVA	20 to 50	3	3 to 33	33	0 to -3	Die	EAR99	HMC985A
HMC-VVD106	Analog VVA	35 to 50	1.5	1.5 to 23.5	17	0 to +4	Die	5A991.h	HMC-VVD106
HMC-VVD104	Analog VVA	70 to 86	2	2 to 16	—	-5 V to +5 V	Die	5A991.h	HMC-VVD104

Fixed Attenuators

Part Number	Description	Frequency (GHz)	Nominal Attenuation Range (dB)	Attenuation Accuracy	Max Input Power (dBm)	Die Size (mm)	Package (mm)	ECCN Code	Ordering Part Number
HMC652	Fixed passive	0 to 25	2	±0.5	27	—	2 × 2 QFN	EAR 99	HMC652LP2E
HMC653	Fixed passive	0 to 25	3	±0.5	26	—	2 × 2 QFN	EAR 99	HMC653LP2E
HMC654	Fixed passive	0 to 25	4	±0.5	25	—	2 × 2 QFN	EAR 99	HMC654LP2E
HMC656	Fixed passive	0 to 25	10	±1.5	25	—	2 × 2 QFN	EAR 99	HMC656LP2E
HMC657	Fixed passive	0 to 25	15	±2	25	—	2 × 2 QFN	EAR 99	HMC657LP2E
HMC658	Fixed passive	0 to 25	20	±2	25	—	2 × 2 QFN	EAR 99	HMC658LP2E
HMC650	Through line	0 to 50	0.15	±0.2	—	17 × 18	Die	EAR 99	HMC650
HMC651	Through line	0 to 50	0.15	±0.2	—	23 × 18	Die	EAR 99	HMC651
HMC652	Fixed passive	0 to 50	2	±0.2	27	17 × 18	Die	EAR 99	HMC652
HMC653	Fixed passive	0 to 50	3	±0.2	26	17 × 18	Die	EAR 99	HMC653
HMC654	Fixed passive	0 to 50	4	±0.2	25	17 × 18	Die	EAR 99	HMC654
HMC656	Fixed passive	0 to 50	10	±0.1	25	17 × 18	Die	EAR 99	HMC656
HMC657	Fixed passive	0 to 50	15	±0.4	25	17 × 18	Die	EAR 99	HMC657
HMC658	Fixed passive	0 to 50	20	±0.5	25	23 × 18	Die	EAR 99	HMC658

HMC1122: 0.5 dB, 6-Bit, Silicon Digital Attenuator; 0.1 GHz to 6.0 GHz
HMC1119: 0.25 dB, 7-Bit, Silicon Digital Attenuator; 0.1 GHz to 6.0 GHz

Key Features

- ▶ Attenuation range: 0.5 dB LSB steps to 31.5 dB
- ▶ Low insertion loss:
 - 1.1 dB @ 1.0 GHz
 - 1.3 dB @ 2.0 GHz
- ▶ Typical step error: Less than ± 0.1 dB
- ▶ Excellent attenuation accuracy: $< \pm 0.2$ dB
- ▶ Low 6° phase shift at 1.0 GHz
- ▶ Safe-state transitions
- ▶ High linearity
 - 1 dB compression (P1dB): 31 dBm typical
 - Input third-order intercept (IP3): 54 dBm typical
- ▶ RF settling time (0.05 dB final RF output): 250 ns
- ▶ Single-supply operation: 3.3 V to 5.0 V
- ▶ ESD rating: Class 2 (2 kV HBM)
- ▶ 24-lead, 4 mm $\times$ 4 mm LFCSP package



Benefits

- ▶ Low attenuation reduces cost and improves performance by eliminating the need for gain compensation
- ▶ Fast switching and settling times for fast switching and time division multiplexing
- ▶ Glitch free and safe operation of RF components

Common Applications

- ▶ RF input stage for spectrum and network analyzers
- ▶ RF front end of cellular protocol tester
- ▶ Receive signal chain of wireless infrastructure: cellular repeaters and boosters

Part Number	Frequency Range	Attenuator Topology	Process	Temperature Range	Package	Price @ 1k (\$U.S.)
HMC1119	0.1 GHz to 6 GHz	7-bit	Silicon	-40°C to +85°C	24-lead LFCSP	4.54
HMC1122	0.1 GHz to 6 GHz	6-bit	Silicon	-40°C to +85°C	24-lead LFCSP	3.62

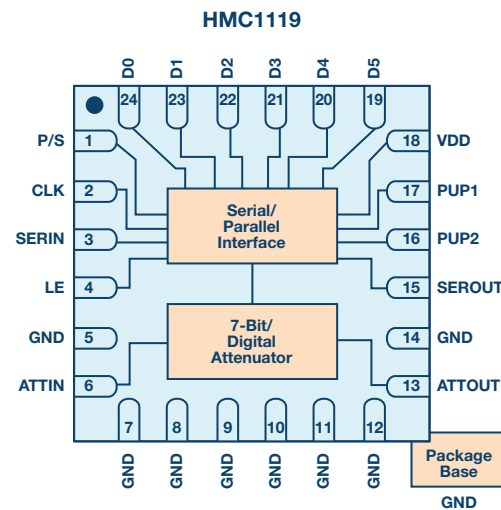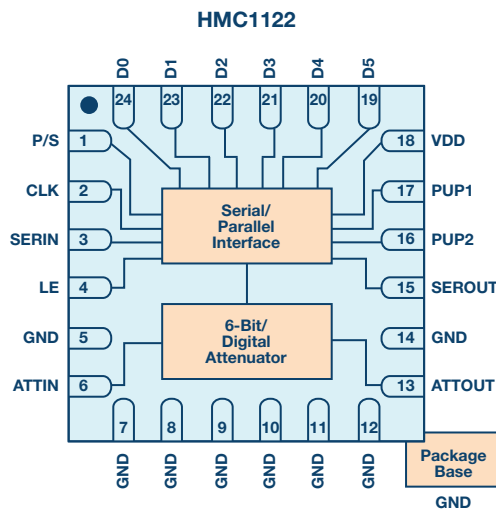

HMC305S: 0.5 dB, 5-Bit, Silicon Digital Attenuator; 0.4 GHz to 7.0 GHz**HMC540S: 1 dB, 4-Bit, Silicon Digital Attenuator; 0.1 GHz to 8.0 GHz****Key Features**

- ▶ Glitch free state transitions
- ▶ Attenuation range:
 - 0.5 dB LSB steps to 15.5 dB (HMC305S)
 - 1 dB LSB steps to 15 dB (HMC540S)
- ▶ Low insertions loss:*
 - 1.0 dB/0.7 dB @ 1.0 GHz
 - 1.1 dB/0.8 dB @ 2.0 GHz
- ▶ High linearity*
 - P0.1dB: 28 dBm/31 dBm
 - Input IP3: 50 dBm/56 dBm
- ▶ TTL/CMOS-compatible serial data interface
 - SPI-compatible serial output (HMC305S)
 - Single control line per bit, parallel control (HMC540S)
- ▶ Excellent attenuation accuracy:*
 - $\pm 0.25/\pm 0.20$ dB typical bit error
- ▶ Single 3.3 V to 5 V supply
- ▶ ESD rating: Class 2 (2 kV HBM)
- ▶ LFCSP package
 - 24-lead, 4 mm $\times$ 4 mm (HMC305S)
 - 16-lead, 3 mm $\times$ 3 mm (HMC540S)
- ▶ Drop-in replacement for HMC305A and HMC540

*HMC305S/HMC540S



Benefits

- ▶ Low attenuation reduces cost and improves performance by eliminating the need for gain compensation
- ▶ Fast switching and settling times for fast switching and time division multiplexing
- ▶ Glitch free and safe operation of RF components

Common Applications

- ▶ RF input stage for spectrum and network analyzers
- ▶ RF front end of cellular protocol tester
- ▶ Receive signal chain of wireless infrastructure: cellular repeaters and boosters

Frequency Range	Attenuator Topology	Process Technology	Temperature Range	Package	Price @ 1k (\$U.S.)
0.4 GHz to 7 GHz	5-bit	Silicon	-40°C to +85°C	24-lead LFCSP	4.70
0.1 GHz to 8 GHz	4-bit	Silicon	-40°C to +85°C	16-lead LFCSP	2.05

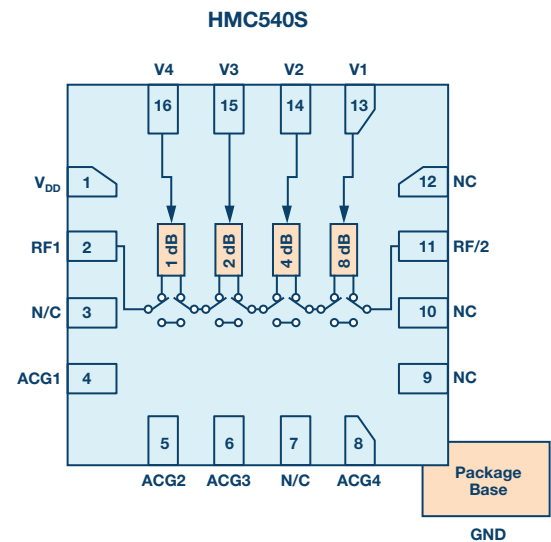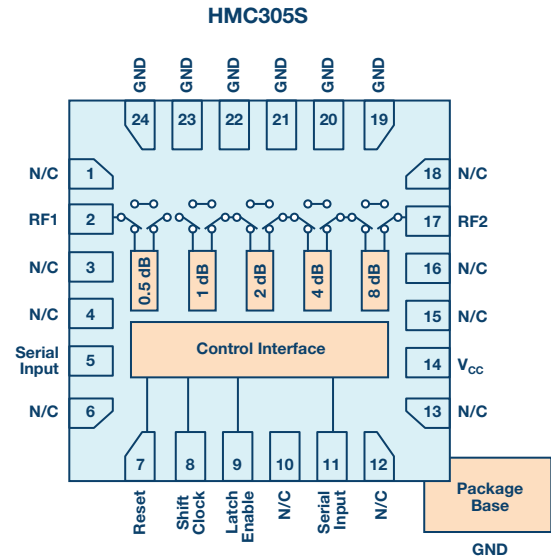

RF Mixers

Single, Double, and Triple Balanced Mixers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	LO/RF Isolation (dB)	LO/IF Isolation (dB)	NF Typ (dB)	P1dB Input Typ (dBm)	LO Drive Nominal (dBm)	Package (mm)	ECCN Code	Ordering Part Number
AD831	Active	0 to 0.5	0 to 0.5	0 to 0.2	0	24	70	30	10.3	10	−10	PLCC	5A991.b	AD831APZ
AD8343	Active	0 to 2.5	0 to 2.5	0 to 2.5	7	17	18	44	14	3	−10	TSSP	5A991.b	AD8343ARUZ
LT5512	Active	0 to 3	0 to 3	0 to 2	0	21	40	35	11	10.1	−10	4 × 4 QFN	EAR 99	LT5512EUF#TRPBF
LT5560	Active low power	0 to 4	0 to 4	0 to 4	2.4	9	52	41	9.3	−2.8	−2	3 × 3 DFN	EAR 99	LT5560EDD#TRPBF
LT5526	Active low power mixer	LF to 2	LF to 2.5	LF to 1	0.4	14.1	50	34	13.7	1	−5	4 × 4 QFN	EAR 99	LT5526EUF#TRPBF
LT5511	Active upconverting mixer	0.01 to 3	0.03 to 2.7	0.001 to 0.3	0	17	36	—	15	5.9	−10	16-lead TSSOP	EAR 99	LT5511EFE#TRPBF
AD8342	Active	0.001 to 3.8	0.001 to 4.1	0 to 2.4	3.7	23	55	27	12.2	8	0	3 × 3 LFCSP	5A991.b	AD8342ACPZ-R2
ADL5350	Passive	0.001 to 4	0.001 to 4	0.001 to 4	−6.7	25	13	29	6.4	19	4	2 × 3 LFCSP	5A991.b	ADL5350ACPZ-R2
ADL5801	Active	0.001 to 6	0.001 to 6	0.001 to 0.6	1.8	29	31	27	9.75	13	0	4 × 4 LFCSP	5A991.b	ADL5801ACPZ-R7
ADL5802	Dual active	0.1 to 6	0.1 to 6	0 to 3	1.5	28	30	37	11	12	0	4 × 4 LFCSP	5A991.b	ADL5802ACPZ-R7
ADL5369	Passive	0.3 to 1.1	0.33 to 1.55	0.03 to 0.45	—	28	—	—	7.2	20	—	5 × 5 LFCSP	EAR 99	ADL5369
LTC5551	Ultrahigh dynamic range passive	0.3 to 3.5	0.2 to 3.5	0.005 to 1	2.4	35.5	27	30	9.7	18	0	4 × 4 QFN	EAR 99	LTC5551IUF#TRPBF
LTC5569	Dual active	0.3 to 4	0.35 to 4.5	LF to 1.6	2	26.8	54	40	11.7	10.2	0	4 × 4 QFN	EAR 99	LTC5569IUF#TRPBF
LTC5567	Active	0.3 to 4	0.3 to 4.5	0.005 to 2.5	1.9	26.9	60	42	11.8	10.1	0	4 × 4 QFN	EAR 99	LTC5567IUF#TRPBF
LTC5577	Active	0.3 to 6	0.3 to 6	0.001 to 1.5	0.7	30.2	67	35	11.8	15.2	0	4 × 4 QFN	EAR 99	LTC5577IUF#TRPBF
LTC5566	Dual active, with IF VGA	0.3 to 6	0.15 to 6	0.001 to 0.5	−1.6 to +10.6	24.1	58	47	13	6.1 to 13.3	0	5 × 5 QFN	EAR 99	LTC5566IUH#TRPBF
AD8344	Active Rx	0.4 to 1.2	0.47 to 1.6	0.07 to 0.4	4.5	24	48	23	10.5	24	0	3 × 3 LFCSP	5A991.b	AD8344ACPZ-REEL7
LT5578	Active upconversion mixer	0.4 to 2.7	0.4 to 3	LF to 0.6	−0.7	25	49	22	10.5	10	0	5 × 5 QFN	EAR 99	LT5578IUH#TRPBF
LT5522	Active	0.4 to 2.7	0.4 to 2.7	LT to 1	−0.1	21.5	45	60	13.9	8	−5	4 × 4 QFN	EAR 99	LT5522EUF#TRPBF
LT5527	Active	0.4 to 3.7	0.38 to 3.5	LF to 0.6	2.3	23.5	45	60	12.5	9	0	4 × 4 QFN	EAR 99	LT5527EUF#TRPBF
LT5557	Active, medium power	0.4 to 3.8	0.38 to 4.2	DC to 0.6	2.9	24.7	46	50	11.7	8.8	0	4 × 4 QFN	EAR 99	LT5557EUF#TRPBF
ADL5367	With LO amp	0.5 to 1.7	0.7 to 1.7	0.03 to 0.45	−7.7	34	40	15	8.3	25	0	5 × 5 LFCSP	5A991.b	ADL5367ACPZ-R7
ADL5357	With LO and IF amp	0.5 to 1.7	0.7 to 1.7	0.03 to 0.45	−8.6	27	47	7	9.1	10	0	5 × 5 LFCSP	EAR 99	ADL5357ACPZ-R8
LTC5540	Passive, with IF gain	0.6 to 1.3	0.7 to 1.2	0.005 to 0.5	7.9	25.9	33	42	9.9	11	0	5 × 5 QFN	EAR 99	LTC5540IUH#TRPBF
LTC5590	Dual passive, with IF gain	0.6 to 1.7	0.7 to 1.5	0.005 to 0.5	8.7	26	39	28	9.7	10.7	0	5 × 5 QFN	EAR 99	LTC5590IUH#TRPBF
LT5519	Active upconverting mixer	0.7 to 1.4	0.3 to 1.8	LF to 0.4	−0.6	17.1	39	35	13.6	5.5	−5	4 × 4 QFN	EAR 99	LT5519EUF#TRPBF
ADL5812	With LO and IF amp	0.7 to 2.8	0.25 to 2.8	0.03 to 0.45	6.7	27	46	37	11.6	13	0	6 × 6 LFCSP	5A991.g	ADL5812ACPZ-R7
ADL5811	With LO and IF amp	0.7 to 2.8	0.25 to 2.8	0.03 to 0.45	7.5	28	25	40	10.7	13	0	5 × 5 LFCSP	5A991.g	ADL5811ACPZ-R7
ADL5358	With LO and IF amp	0.7 to 1	0.53 to 1.67	0.03 to 0.45	8.3	25	31	33	9.9	11	0	6 × 6 LFCSP	5A991.b	ADL5358ACPZ-R7
HMC686	With LO amp	0.7 to 1.5	0.85 to 1.5	0 to 0.5	−7.5	34	26	41	7.5	24	0	4 × 4 LFCSP	EAR 99	HMC686LP4E
HMC684	With LO amp	0.7 to 1	0.6 to 1	0 to 0.45	−7	32	23	30	7	25	0	4 × 4 LFCSP	EAR 99	HMC684LP4E
HMC683	Dual Rx with LO amp	0.7 to 1	0.57 to 0.9	0.06 to 0.5	7.5	23	16	20	11	11	0	6 × 6 LFCSP	EAR 99	HMC683LP6CE
LT5525	Active low power mixer	0.8 to 2.5	0.5 to 3	LF to 1	−2	17.6	40	40	15.1	4	−5	4 × 4 QFN	EAR 99	LT5525EUF#TRPBF
LT5579	Active upconversion mixer	0.9 to 3.8	0.75 to 4.3	LF to 1	1.3	27.5	36	26	12	13.7	0	5 × 5 QFN	EAR 99	LT5579IUH#TRPBF

■ = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

Single, Double, and Triple Balanced Mixers (Continued)

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	LO/RF Isolation (dB)	LO/IF Isolation (dB)	NF Typ (dB)	P1dB Input Typ (dBm)	LO Drive Nominal (dBm)	Package (mm)	ECCN Code	Ordering Part Number
LTC5510	Active	1 to 6	1 to 6.5	1 to 6	1.1	25	65	35	11.6	11.5	0	4 × 4 QFN	EAR 99	LTC5510IUF#TRPBF
ADL5365	With LO amp	1.2 to 2.5	1.23 to 2.47	0 to 0.45	-7.3	36	33	18	8.3	25	0	5 × 5 LFCSP	5A991.b	ADL5365ACPZ-R7
ADL5355	With LO and IF amp	1.2 to 2.5	1.23 to 2.47	0.03 to 0.45	8.4	27	39	13	9.2	10	0	5 × 5 LFCSP	5A991.b	ADL5355ACPZ-R7
LT5520	Active upconverting mixer	1.3 to 2.3	0.9 to 2.7	DC to 0.4	-1	15.9	36	30	15	4	-5	4 × 4 QFN	EAR 99	LT5520EUF#TRPBF
LTC5541	Passive, with IF gain	1.3 to 2.3	1.4 to 2	0.005 to 0.5	7.8	26.4	33	38	9.6	11.3	0	5 × 5 QFN	EAR 99	LTC5541IUH#TRPBF
LTC5591	Dual passive, with IF gain	1.3 to 2.3	1.4 to 2.1	0.005 to 0.5	8.5	26.2	37	40	9.9	10.7	0	5 × 5 QFN	EAR 99	LTC5591IUH#TRPBF
HMC213B Upcoming	Passive	1.5 to 4.5	1.5 to 4.5	0 to 1.5	-8.5	19	40	40	8.5	10	13	8-lead MSOP	EAR 99	HMC213BMS8GE
LTC5542	Passive, with IF gain	1.6 to 2.7	1.7 to 2.5	0.005 to 0.5	8	26.8	35	45	9.9	11.3	0	5 × 5 QFN	EAR 99	LTC5542IUH#TRPBF
LTC5592	Dual passive, with IF gain	1.6 to 2.7	1.5 to 2.5	0.005 to 0.5	8.3	27.3	35	38	9.8	11	0	5 × 5 QFN	EAR 99	LTC5592IUH#TRPBF
ADL5356	Passive mixer	1.7 to 2.2	1.4 to 2.1	0.03 to 0.45	8.2	31	35	24	9.9	11	0	6 × 6 LFCSP	5A991.g	ADL5356ACPZ-R7
HMC687	With LO amp	1.7 to 2.2	1.7 to 2.4	0 to 0.5	-8	35	32	29	8	23	0	4 × 4 QFN	EAR 99	HMC687LP4E
HMC685	With LO amp	1.7 to 2.2	1.5 to 2.2	0 to 0.5	-8	35	30	30	8	24	0	4 × 4 QFN	EAR 99	HMC685LP4E
HMC682	Dual Rx with LO amp	1.7 to 2.2	1.4 to 2	0.06 to 0.4	6	25	25	22	12	15	0	6 × 6 QFN	EAR 99	HMC682LP6CE
HMC689	With LO amp	2 to 2.7	2 to 3	0 to 0.8	-7.5	32	34	26	7.5	23	0	4 × 4 QFN	EAR 99	HMC689LP4E
HMC688	With LO amp	2 to 2.7	1.7 to 2.4	0 to 0.7	-7.5	35	25	27	7.5	25	0	4 × 4 QFN	EAR 99	HMC688LP4E
LTC5548	With 2× LO	2 to 14	1 to 12	DC to 6	-10.2	18.7	29	32	9.6	15.2	0	3 × 2 QFN	EAR 99	LTC5548IUDB#TRPBF
LTC5549	With 2× LO	2 to 14	1 to 12	0.5 to 6	-10.8	22.8	30	23	10.4	14.3	0	3 × 2 QFN	EAR 99	LTC5549IUDB#TRPBF
HMC1048A Upcoming	Passive	2 to 18	2 to 18	0 to 4	-10	22	37	25	10	12	13	3 × 3 LFCSP	EAR 99	HMC1048ALC3B
LTC5543	Passive, with IF gain	2.2 to 4	2.4 to 3.6	0.005 to 0.6	8.4	24.5	29	37	10.2	10.9	0	5 × 5 QFN	EAR 99	LTC5543IUH#TRPBF
ADL5363	With LO amp	2.3 to 2.9	2.33 to 3.35	0 to 0.45	-7.7	31	32	22	7.6	25	0	5 × 5 LFCSP	5A991.b	ADL5363ACPZ-R7
ADL5354	Dual Rx with LO amp	2.2 to 2.7	1.75 to 2.67	0.03 to 0.45	8.6	26	37	21	10.4	11	0	6 × 6 LFCSP	5A991.b	ADL5354ACPZ-R7
ADL5353	With LO and IF amp	2.2 to 2.7	2.23 to 3.15	0.03 to 0.45	9	24	38	15	9.8	10	0	5 × 5 LFCSP	5A991.b	ADL5353ACPZ-R7
LTC5593	Dual passive, with IF gain	2.3 to 4.5	2.1 to 3.8	0.005 to 0.6	8.5	27.7	35	44	9.5	10.4	0	5 × 5 QFN	EAR 99	LTC5593IUH#TRPBF
LTC5562 Upcoming	Active low power	LF to 7	DC to 9	DC to 7	1	21	35	35	14.6	5	0	2 × 2 QFN	EAR 99	LTC5562IUC#TRPBF
HMC557A New	Passive	2.5 to 7	2.5 to 7	0 to 3	-7	22	47	34	7	10	15	4 × 4 LFCSP	EAR 99	HMC557ALC4
HMC219B New	Passive	2.5 to 7	2.5 to 7	0 to 3	-9	18	40	35	9	11	13	MSOP	EAR 99	HMC219BMS8GE
LTC5576	Active upconversion mixer	3 to 8	1 to 8	0.03 to 6	-0.6	25.6	40	35	14.1	10.4	0	4 × 4 QFN	EAR 99	LTC5576IUF#TRPBF
HMC787A New	Passive	3 to 10	3 to 10	0 to 4	-9	24	43	26	9	17	13	3 × 3 LFCSP	EAR 99	HMC787ALC3B
LTC5553 New	With integ LO buffer	3 to 20	1 to 20	0.5 to 9	-11.6	21.5	32	20	12.1	14.8	0	3 × 2 QFN	EAR 99	LTC5553IUDB#TRPBF
LTC5552 Upcoming	With integ LO buffer	3 to 20	1 to 20	DC to 6	-10.8	18.5	24	19	11.7	14.8	0	3 × 2 QFN	EAR 99	LTC5552IUDB#TRPBF
HMC666	With LO amp	3.1 to 3.9	2.8 to 3.6	0 to 0.8	-9	31	27	29	9	23	0	4 × 4 LFCSP	EAR 99	HMC666LP4E
HMC218B	Passive	3.5 to 8	3.5 to 8	0 to 1.6	-7	17	38	32	7	10	13	MSOP	EAR 99	HMC218BMS8GE
LTC5544	Passive, with IF gain	4 to 6	4.2 to 5.8	0.005 to 1	7.4	25.9	30	28	11.3	11.4	0	5 × 5 QFN	EAR 99	LTC5544IUH#TRPBF
HMC129A Upcoming	Passive	4 to 8	4 to 8	0 to 3	-7	17	40	40	7	10	15	4 × 4 LFCSP	EAR 99	HMC129ALC4
HMC558A New	Passive	5.5 to 14	5.5 to 14	0 to 6	-7.5	21	45	45	7.5	11.5	15	3 × 3 LFCSP	EAR 99	HMC558ALC3B
HMC773A	Passive	6 to 26	6 to 26	0 to 8	-9	19	37	37	9	10	13	3 × 3 LFCSP	EAR 99	HMC773ALC3B
HMC553A Upcoming	Passive	7 to 14	7 to 14	0 to 5	-7.5	20	50	35	7.5	10.5	13	3 × 3 LFCSP	EAR 99	HMC553ALC3B

■ = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

Single, Double, and Triple Balanced Mixers (Continued)

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	LO/RF Isolation (dB)	LO/IF Isolation (dB)	NF Typ (dB)	P1dB Input Typ (dBm)	LO Drive Nominal (dBm)	Package (mm)	ECCN Code	Ordering Part Number
HMC774A Upcoming	Passive	7 to 34	7 to 34	0 to 8	-10.5	21	35	35	10.5	13	15	3 × 3 LFCSP	EAR 99	HMC774ALC3B
HMC774A Upcoming	Passive	7 to 43	7 to 43	0 to 8	-9.5	21	35	35	9.5	13	13	Die	EAR 99	HMC774A
HMC412B New	Passive	9 to 15	9 to 15	0 to 2.5	-8.4	18	44	41	8.4	11	13	MSOP	EAR 99	HMC412BMS8GE
HMC260A Upcoming	Passive	14 to 26	14 to 26	0 to 8	-8.5	20	40	32	8.5	13	13	3 × 3 LFCSP	EAR 99	HMC260ALC3B
HMC1106	Passive	15 to 36	20 to 50	0 to 24	-11	16	38	32	9	0	15	Die	EAR 99	HMC1106
HMC1081	Passive	50 to 75	40 to 85	0 to 26	-7.5	16	30	20	7.5	10	12	Die	EAR 99	HMC1081
HMC-MDB169	Passive	54 to 64	54 to 64	0 to 5	-8	13	30	25	8	4	13	Die	5A991.h	HMC-MDB169
HMC-MDB277	Passive	70 to 90	70 to 90	0 to 18	-12	—	—	—	—	—	14	Die	5A991.h	HMC-MDB277
HMC292A Upcoming	Passive	16 to 30	16 to 30	0 to 8	-8.5	20	40	32	8.5	14	13	3 × 3 LFCSP	EAR 99	HMC292ALC3B
HMC292A Upcoming	Passive	18 to 32	18 to 32	0 to 8	-8	19	38	40	8	12	13	Die	EAR 99	HMC292A
HMC554A Upcoming	Passive	11 to 20	11 to 20	0 to 6	-7.5	18	46	40	7.5	11	13	3 × 3 LFCSP	EAR 99	HMC554ALC3B
HMC329A Upcoming	Passive	24 to 32	24 to 32	0 to 8	-10.5	18	38	40	10.5	13	13	3 × 3 QFN	EAR 99	HMC329ALC3B
HMC560A Upcoming	Passive	24 to 40	24 to 40	0 to 17	-10.5	21	31	35	10.5	14	13	5 × 5 LFCSP	EAR 99	HMC560ALM3

I/Q Mixers and Image Reject Mixers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	Image Rejection (dB)	LO/RF Isolation (dB)	LO/IF Isolation (dB)	P1dB Input Typ (dBm)	LO Drive Nominal (dBm)	Package (mm)	ECCN Code	Ordering Part Number
HMC8193 Upcoming	I/Q and IRM	2.5 to 8.5	2.5 to 8.5	0 to 3.5	-8	21	32	45	40	14	18	4 × 4 LFCSP	EAR 99	HMC8193LC4
HMC525A Upcoming	I/Q and IRM	4 to 8.5	4 to 8.5	0 to 3.5	-8	23	35	45	20	14	15	4 × 4 LFCSP	EAR 99	HMC525ALC4
HMC520A New	I/Q and IRM	6 to 10	6 to 10	0 to 3.5	-8	19	23	43	25	10	15	4 × 4 LFCSP	EAR 99	HMC520ALC4
HMC521A Upcoming	I/Q and IRM	8.5 to 13.5	8.5 to 13.5	0 to 3.5	-8	23	38	50	22	14	15	4 × 4 LFCSP	EAR 99	HMC521ALC4
HMC8191 New	I/Q and IRM	6 to 26	6 to 26	0 to 5	-9	20	25	42	41	12	18	4 × 4 LFCSP	EAR 99	HMC8191LC4
HMC1056	I/Q and IRM	8 to 12	8 to 12	0 to 4	-8	18	21	40	37	9	10	4 × 4 LFCSP	EAR 99	HMC1056LP4BE
HMC524A Upcoming	I/Q and IRM	22 to 32	22 to 32	0 to 4.5	-9	24	26	41	29	14	15	3 × 3 LFCSP	EAR 99	HMC524ALC3B
HMC-MDB172	I/Q and IRM	19 to 33	19 to 33	0 to 5	-8	17	25	35	23	8	16	Die	5A991.h	HMC-MDB172
HMC1063	I/Q and IRM	24 to 28	24 to 28	0 to 3	-9.5	17	21	38	40	8	10	3 × 3 LFCSP	EAR 99	HMC1063LP3E
HMC-MDB171	Subharmonic I/Q	35 to 45	35 to 45	0 to 5	-12.5	17	25	35	20	8	16	Die	5A991.h	HMC-MDB171
HMC-MDB218	Subharmonic I/Q	54 to 64	27 to 32	0 to 3	-12.5	7	30	30	30	-2	10	Die	5A991.h	HMC-MDB218

Subharmonic Mixers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	LO/RF Isolation (dB)	LO/IF Isolation (dB)	Input P1dB (dBm)	Image Rejection (dB)	LO Drive (dBm)	Package (mm)	ECCN Code	Ordering Part Number
HMC337	Subharmonic	17 to 25	9 to 12	0 to 3	-9	10	27	47	0	—	-5	Die	EAR 99	HMC337
HMC264	Subharmonic	20 to 32	10 to 16	0 to 6	-10	13	37	40	4	—	-4	Die	EAR 99	HMC264
HMC264	Subharmonic	20 to 30	10 to 15	0 to 4	-9	12	35	40	4	—	-4	3 × 3 QFN	EAR 99	HMC264LM3
HMC264	Subharmonic	21 to 31	10.5 to 15.5	0 to 6	-9	12	30	40	3	—	-4	3 × 3 LFCSP	EAR 99	HMC264LC3B
HMC265	Subharmonic	20 to 32	10 to 16	0.7 to 3	3	10	30	55	2	—	-4	Die	EAR 99	HMC265
HMC265	Subharmonic	20 to 31	10 to 15.5	0.7 to 3	3	10	28	47	2	—	-4	3 × 3 QFN	EAR 99	HMC265LM3
HMC338	Subharmonic	26 to 33	13 to 16.5	0 to 2.5	-9	10	32	40	1	—	-5	Die	5A991.b	HMC338
HMC338	Subharmonic	24 to 34	12 to 16.5	0 to 3	-11	13	33	50	5	—	-5	3 × 3 LFCSP	5A991.b	HMC338LC3B
HMC404	Subharmonic I/Q	26 to 33	13 to 16.5	0 to 3	-11	16	35	35	6	22	2	Die	EAR 99	HMC404
HMC339	Subharmonic	33 to 42	16.5 to 21	0 to 3	-10	10	37	40	0	—	2	Die	EAR 99	HMC339
HMC1093	Subharmonic	37 to 46.5	8.5 to 11	0 to 7.5	-11	26	15	18	18	—	-1	Die	EAR 99	HMC1093
HMC1057	Subharmonic I/Q	71 to 86	29 to 43	0 to 12	-12	13	50	30	0	16	13	Die	EAR 99	HMC1057
HMC1058	Subharmonic	71 to 86	29 to 43	0 to 12	-11	6	28	20	0	—	9	Die	EAR 99	HMC1058

— = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

I/Q Downconverters/Receivers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Input IP3 (dBm)	Image Rejection (dBc)	NF Typ (dB)	LO Drive Nominal (dBm)	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC951B	I/Q downconverter	5.6 to 8.6	5.6 to 8.6	0 to 3.5	13	1	24	2	2	3.5	160	5 × 5 LFCSP	EAR 99	HMC951BLP4E
HMC8108 New	I/Q downconverter	9 to 10	9 to 10	0.02 to 1	13	6	20	2	−5	3, 3, 1.5	20, 30, 40	5 × 5 LFCSP	EAR 99	HMC8108LC5
HMC1113	I/Q downconverter	10 to 16	10 to 16	0 to 3.5	12	1	25	2	6	3, 4	160	5 × 5 LFCSP	EAR 99	HMC1113LP5E
HMC1065	I/Q downconverter	27 to 34	11.5 to 19	0 to 4	12	−2	17	3	2	3.0	240	4 × 4 LFCSP	EAR 99	HMC1065LP4E
HMC6147A	I/Q downconverter	37 to 44	16.5 to 22	0 to 4	13	2	25	4	3	3.0	225	5 × 5 LFCSP	EAR 99	HMC6147ALC5A
HMC977	I/Q downconverter	20 to 28	8.3 to 15.7	0 to 3.5	14	2	21	3	6	3.5	170	4 × 4 LFCSP	EAR 99	HMC977LP4E
HMC967	I/Q downconverter	21 to 24	8.8 to 13.5	0 to 3.5	15	1	25	3	6	3.5	170	4 × 4 LFCSP	EAR 99	HMC967LP4E
HMC966	I/Q downconverter	17 to 20	7.5 to 11.75	0 to 3.5	14	0	40	3	6	3.5	160	4 × 4 LFCSP	EAR 99	HMC966LP4E
HMC904	I/Q downconverter	17 to 24	7.5 to 12.3	0 to 3.5	12	0	32	3	4	3.5	160	5 × 5 LFCSP	EAR 99	HMC904LC5
HMC570	I/Q downconverter	17 to 21	7 to 12	0 to 3.5	12	1	22	4	3.5	3.5	125	Die	EAR 99	HMC570
HMC570	I/Q downconverter	17 to 21	7 to 12	0 to 3.5	10	2	17	3	4	3.5	125	5 × 5 LFCSP	EAR 99	HMC570LC5
HMC571	I/Q downconverter	21 to 25	9 to 14	0 to 3.5	11	5	24	3	4	3.5	125	Die	EAR 99	HMC571
HMC571	I/Q downconverter	21 to 25	9 to 14	0 to 3.5	11	6	23	3	4	3.5	125	5 × 5 LFCSP	EAR 99	HMC571LC5
HMC572	I/Q downconverter	23 to 28	9 to 15.5	0 to 3.5	10	6	20	4	4	3.5	125	5 × 5 LFCSP	EAR 99	HMC572LC5
HMC6789B New	I/Q downconverter	37 to 44	16.5 to 24	0 to 4	14	−1	14	3.5	3	150, 75	3, 3,	5 × 5 LFCSP	EAR 99	HMC6789BLC5A
HMC7586	E-band I/Q downconverter	71 to 76	11.83 to 14.33	0 to 10	12.5	−1	28	5	2	4, 1.5, 3	175, 80, 50	Die	5A991.b	HMC7586
HMC7587	E-band I/Q downconverter	81 to 86	11.83 to 14.33	0 to 10	10	−2	30	6	2	4, 1.5, 3	175, 80, 50	Die	5A991.b	HMC7587

I/Q Upconverters/Transmitters

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	Output IP3 (dBm)	Sideband Rejection (dBc)	LO Drive Nominal	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC6505A Upcoming	I/Q upconverter	5.6 to 8.6	5.6 to 11.6	0 to 3.5	13	35	24	2	3.5	160	5 × 5 LFCSP	EAR 99	HMC6505ALC5
ADRF6780	Wideband I/Q upconverter	5.9 to 23.6	5.4 to 14	0 to 3.5	13	26	25	0	3.3, 5	400, 160	5 × 5 LFCSP	5A991.h	ADRF6780ACPZN-R7
HMC7911	I/Q upconverter	17.5 to 20	7.1 to 11.6	0 to 3.5	18	33	30	4	5	320	5 × 5 LFCSP	EAR 99	HMC7911LP5E
HMC7912	I/Q upconverter	21 to 24	8.5 to 14	0 to 3.5	14	32	18	4	5	320	5 × 5 LFCSP	EAR 99	HMC7912LP5E
HMC815B Upcoming	I/Q upconverter	21 to 27	10.5 to 14.5	0 to 3.75	12	27	22	4	4.5	350	5 × 5 LFCSP	EAR 99	HMC815BLC5
HMC6787A	I/Q upconverter	37 to 40	16.5 to 22	0 to 4	10	26	17	4	3	350	5 × 5 LFCSP	EAR 99	HMC6787ALC5A
HMC6146B	I/Q upconverter	40 to 44	18 to 22	0 to 4	11	28	18	4	3	350	5 × 5 LFCSP	EAR 99	HMC6146BLC5A
HMC8118	E-band I/Q upconverter	71 to 76	11.83 to 14.33	0 to 10	11	—	22	2	4, 1.5	175, 80	Die	5A991.b	HMC8118
HMC8119	E-band I/Q upconverter	81 to 86	11.83 to 14.33	0 to 10	10	—	22	2	4, 1.5	175, 80	Die	5A991.b	HMC8119

Mixers with Integrated LO

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Power Gain (dB)	PLL Phase Noise @ 10 kHz Offset (dBc/Hz)	VCO Phase Noise @ 1 MHz Offset (dBc/Hz)	Input IP3 (dBm)	Noise Figure (dB)	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADRF6655	With PLL and VCO	0.1 to 2.5	1.05 to 2.3	LF to 2.2	6	−83	−136	29	12	5	260 to 285	6 × 6 LFCSP	5A991.b	ADRF6655ACPZ-R7
ADRF6601	With PLL and VCO	0.3 to 2.5	0.75 to 1.16	0 to 0.5	6.7	−99	−135	30.9	13.5	5	253 to 281	6 × 6 LFCSP	5A991.b	ADRF6601ACPZ-R7
ADRF6658	Dual Rx with IF amp	0.69 to 3.8	N/A	—	Programmable 26.5	N/A	N/A	12 to 29	13	3.3	Selectable 260 to 440	7 × 7 LFCSP	5A991.h	ADRF6658BCPZ-RL7
ADRF6620	Rx mixer with IF, DGA, frac-N PLL and VCO	0.7 to 2.5	0.35 to 2.85	—	9	−81	−110	40	19	5	260, 340	7 × 7 LFCSP	5A991.h	ADRF6620ACPZ-R7

■ = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

Mixers with Integrated LO (Continued)

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Power Gain (dB)	PLL Phase Noise @ 10 kHz Offset (dBc/Hz)	VCO Phase Noise @ 1 MHz Offset (dBc/Hz)	Input IP3 (dBm)	Noise Figure (dB)	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC1190A	Dual Rx with frac-N PLL and VCO	0.7 to 2.39	0.05 to 4	0.05 to 0.35	8.9	−118	−139	27	9	5, 3.3	—	6 × 6 LFCSP	5A991.h	HMC1190ALP6NETR
ADRF6612	Dual Rx mixer with tunable balun, PLL, and VCO	0.7 to 3	0.2 to 2.7	0.04 to 0.5	9.3	−80	−138	28	11.3	5, 3.6	260, 260	7 × 7 LFCSP	5A991.g	ADRF6612ACPZ-R7
ADRF6614	Dual Rx mixer with tunable balun, PLL, and VCO	0.7 to 3	0.2 to 2.7	0.02 to 0.5	9.3	MC-GSM compliant	MC-GSM compliant	28	11.3	5, 3.6	260, 260	7 × 7 LFCSP	5A991.h	ADRF6614ACPZ-R7
ADRF6602	With PLL and VCO	1 to 3.1	1.55 to 2.15	0 to 0.5	6.5	−92	−128	29.5	12	5	235 to 263	6 × 6 LFCSP	5A991.b	ADRF6602ACPZ-R7
ADRF6603	With PLL and VCO	1.1 to 3.2	2.1 to 2.6	0 to 0.5	6.7	−88	−128	29.3	15.6	5	235 to 261	6 × 6 LFCSP	5A991.b	ADRF6603ACPZ-R7
ADRF6604	With PLL and VCO	1.2 to 3.6	2.5 to 2.9	0 to 0.5	6.8	−87	−126	27	15.5	5	135 to 276	6 × 6 LFCSP	5A991.b	ADRF6604ACPZ-R7

ADRF6780: 6 GHz to 24 GHz Wideband I/Q Modulator

Key Features

- ▶ Wideband RF frequency from 6 GHz to 24 GHz
- ▶ Selectable LO multiplier path:
 - 1× LO path for 5.4 to 14 GHz
 - 2× LO path for 10.8 to 28 GHz
- ▶ Supports direct conversion and IF modes
 - ~1 GHz I/Q bandwidth @ −1 dB for baseband interface
 - 0.8 GHz to 3.5 GHz for IF interface
- ▶ High single sideband rejection of >35 dBc
- ▶ Integrated VVA for adjustable gain range between +10 dB to −8 dB
- ▶ High output IP3 > 20 dBm
- ▶ Low output noise: <−150 dBm/Hz
- ▶ SPI-programmable interface for increased flexibility and control
 - Linearizer to optimize linearity by phase correction
 - Quadrature phase balancing for improved sideband rejection
 - Supports power-down and reset modes
- ▶ Integrated power detector for feed through optimization
- ▶ Standard supply voltage rails: 1.8 V, 3.3 V, and 5 V
- ▶ 5 mm × 5 mm LFCSP


Benefits

- ▶ Simplifies design by replacing the entire transmit chain with one integrated component
- ▶ One part for all upconverter designs between 6 GHz to 24 GHz; eliminates multiple upconverters for each band
- ▶ Flexibility of ZIF or superhetrodyne architecture
- ▶ Programmable interface provides increased control to optimize the parts performance to specific design goals

Common Applications

- ▶ Microwave point-to-point or point-to-multipoint radios
- ▶ Military systems and electronic radars requiring improved sensitivity

Frequency Range	IF Range	I/Q Bandwidth	Temperature Range	Package	Price @ 1k (\$U.S.)
6 GHz to 24 GHz	0.8 GHz to 3.5 GHz	~1 GHz	−40°C to +85°C	32-lead LFCSP	64.45

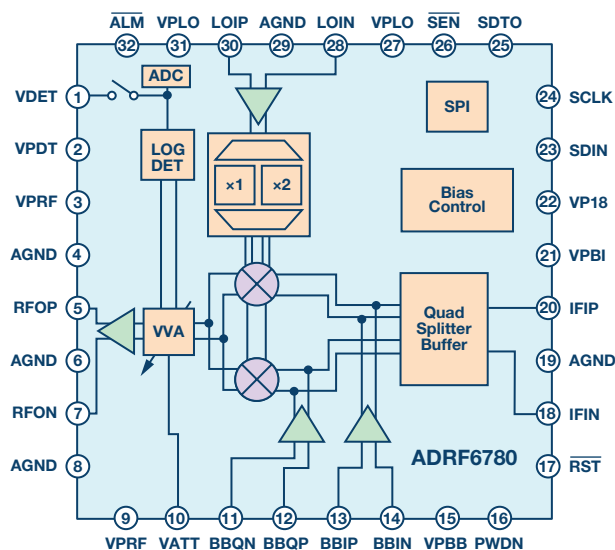

I/Q Modulators and Demodulators

I/Q Modulators

Part Number	Description	RF Frequency (GHz)	LO Spur (dBm)	Sideband Suppression (dBc)	Noise (dBm/Hz)	Output P1dB (dBm)	Output IP3 (dBm)	Baseband Bandwidth @ 3 dB (MHz)	V _S (V)	I _{SV} (mA)	Package (mm)	ECCN Code	Ordering Part Number
LTC5598	Wideband	0.005 to 1.6	−51	−55	−160.9	8.4	25.5	400	5	165	4 × 4 QFN	EAR 99	LTC5598IUF#TRPBF
LTC5599	Wideband	0.03 to 1.3	−51.5	−52.6	−156.7	5	20.8	57	3.3	28	4 × 4 QFN	EAR 99	LTC5599IUF#TRPBF
ADL5386	VVA and AGC	0.05 to 2.2	−38	−46	−160	11.1	25	700	5	230	6 × 6 LFCSP	5A991.b	ADL5386ACPZ-R7
HMC795	With VGA	0.05 to 2.8	—	−53	−156	11	25	440	3.3, 5	127	5 × 5 QFN	EAR 99	HMC795LP5E
HMC1097	Direct quadrature	0.1 to 6	−40	−40	−162	11	29	700	5	170	4 × 4 LFCSP	EAR 99	HMC1097LP4E
AD8345	Wideband	0.14 to 1	−42	−42	−155	2.5	25	80	3, 5	58, 62	TSSOP	5A991.b	AD8345AREZ
LTC5588-1	Wideband	0.2 to 6	−39.6	−56.6	−160.6	12	31	600	3.3	303	4 × 4 QFN	EAR 99	LTC5588IPF-1#TRPBF
ADL5370	Narrow-band	0.3 to 1	−50	−41	−160	11	24	500	5	205	4 × 4 LFCSP	5A991.b	ADL5370ACPZ-R7
ADL5385	Broadband	0.3 to 2.2	−46	−50	−159	11	26	500	5	215	4 × 4 LFCSP	5A991.b	ADL5385ACPZ-R7
ADL5375	Broadband	0.4 to 6	−46	−52	−160	9.4	26.8	750	5	200	4 × 4 LFCSP	5A991.b	ADL5375-05ACPZ-R2
ADL5371	Narrow-band	0.5 to 1.5	−50	−55	−159	14.5	27	500	5	175	4 × 4 LFCSP	5A991.b	ADL5371ACPZ-R7
LT5558	BB R _{IN} = 50 Ω	0.6 to 1.1	−43.7	−49	−158	7.8	22.4	400	5	108	4 × 4 QFN	EAR 99	LT5558EUF#TRPBF
LT5571	Narrow-band	0.62 to 1.1	−42	−53	−159	8.1	21.7	400	5	97	4 × 4 QFN	EAR 99	LT5571EUF#TRPBF
LT5568	Narrow-band	0.7 to 1.05	−43	−46	−160.3	8.3	22.9	380	5	117	4 × 4 QFN	EAR 99	LT5568EUF#TRPBF
LT5568-2	Narrow-band	0.7 to 1.05	−43	−52	−159.4	8.6	22.9	380	5	110	4 × 4 QFN	EAR 99	LT5568-2EUF#TRPBF
AD8349	Low power	0.7 to 2.7	−45	−35	−155	7.6	21	160	5	135	TSSOP	5A991.b	AD8349AREZ
LTC5589	Low power	0.7 to 6	−40.2	−41.5	−158.1	3.9	17.5	167	3.3	29.5	4 × 4 QFN	EAR 99	LTC5589IUF#TRPBF
AD8346	Low power	0.8 to 2.5	−42	−36	−147	−3	20	70	3, 5	43, 45	TSSOP	5A991.b	AD8346ARUZ
ADL5591	Narrow-band	0.805 to 1.905	—	−47	−157	16	30	250	5	170	6 × 6 LFCSP	5A991.b	ADL5591ACPZ-R7
ADL5590	Narrow-band	0.869 to 0.9	—	−50	−157	16	29	250	5	170	6 × 6 LFCSP	5A991.b	ADL5590ACPZ-R7
LT5528	BB R _{IN} = 50 Ω	1.5 to 2.4	−42	−45	−159.3	7.9	21.8	400	5	125	4 × 4 QFN	EAR 99	LT5528EUF#TRPBF
LT5572	Narrow-band	1.5 to 2.5	−39.4	−41.2	−158.6	9.3	21.6	460	5	120	4 × 4 QFN	EAR 99	LT5572EUF#TRPBF
ADL5372	Narrow-band	1.5 to 2.5	−45	−45	−158	14.2	27	500	5	165	4 × 5 LFCSP	5A991.b	ADL5372ACPZ-R2
ADL5373	Narrow-band	2.3 to 3	−32	−57	−157	13.8	26	500	5	174	4 × 4 LFCSP	5A991.b	ADL5373ACPZ-WP
ADRF6780 New	Wideband	5.9 to 23.6	−38	25	−147	11	26	1000	3.3, 5	400, 160	5 × 5 LFCSP	5A991.h	ADRF6780ACPZN-R7

I/Q Demodulators

Part Number	Description	RF Frequency (MHz)	Gain Error (dB)	Phase Error (°)	Noise Figure (dB)	Input P1dB (dBm)	Input IP3 (dBm)	Baseband Bandwidth @ 3 dB (MHz)	V _S (V)	I _{SV} (mA)	Package (mm)	ECCN Code	Ordering Part Number
LTC5584	Broadband	0.03 to 1.4	0.01	0.7	10	13.1	28	530	5	200	4 × 4 QFN	EAR 99	LTC5584IUF#TRPBF
LT5546	Low power, 2× LO, 55 dB VGA	0.04 to 0.5	0.14	0.6	7.8	−10	−1	17	1.8 to 5.25	24	4 × 4 QFN	EAR 99	LT5546EUF#TRPBF
LT5506	Low power, 2× LO, 55 dB VGA	0.04 to 0.5	0.2	0.6	6.8	−11.5	−0.5	8.8	1.8 to 5.25	26.6	4 × 4 QFN	EAR 99	LT5506EUF#TRPBF
LT5517	Low frequency, 2× LO	0.04 to 0.9	0.03	0.7	12.4	10	21	130	5	90	4 × 4 QFN	EAR 99	LT5517EUF#TRPBF
AD8348	Broadband with VGA	0.05 to 1	0.25	0.5	10.75	13	28	125	3, 5	47, 51	TSSOP	5A991.b	AD8348ARUZ
ADL5387	2× LO, broadband	0.03 to 2	0.05	0.2	12	13	31	240	5	180	4 × 4 LFCSP	5A991.b	ADL5387ACPZ-WP
LTC5586 New	Ultrawideband, with VGA, digital cal	0.3 to 6	0.06	0.06	19.5	13	30	1000	5	440	5 × 5 QFN	EAR 99	LTC5586IUF#TRPBF
LTC5585	Broadband	0.4 to 4	0.05	0.7	12.7	16	25.7	530	5	200	4 × 4 QFN	EAR 99	LTC5585IUF#TRPBF
ADL5380	Broadband	0.4 to 6	0.07	0.2	11.7	11.6	27.8	390	5	245	4 × 4 LFCSP	5A991.b	ADL5380ACPZ-WP
ADL5382	Broadband	0.7 to 2.7	0.05	0.2	15.6	14.4	30.5	370	5	220	4 × 4 LFCSP	5A991.b	ADL5382ACPZ-WP
LT5516	Narrow-band	0.8 to 1.5	0.2	1	12.8	6.6	21.5	260	5	117	4 × 4 QFN	EAR 99	LT5516EUF#TRPBF
AD8347	I/Q demodulator and VGA	0.8 to 2.7	0.3	1	11	−2	11.5	65	3, 5	64, 68	4 × 4 LFCSP	5A991.b	AD8347ARUZ
LT5575	Broadband	0.8 to 2.7	0.01	0.4	12.7	11.2	22.6	490	5	132	4 × 4 QFN	EAR 99	LT5575EUF#TRPBF
LT5515	Narrow-band	1.5 to 2.5	0.3	1	16.8	9	20	260	5	125	4 × 4 QFN	EAR 99	LT5515EUF#TRPBF

I/Q Modulators with Integrated LO

Part Number	Description	RF Frequency (MHz)	PLL Phase Noise @ 10 kHz Offset (dBc/Hz)	PLL Phase Noise @ 1 MHz Offset (dBc/Hz)	LO Spur (dBm)	Sideband Suppression (dBc)	Noise (dBm/Hz)	Output P1dB (dBm)	Output IP3 (dBm)	Baseband Bandwidth @ 3 dB (MHz)	V _s (V)	I _{sy} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC1197	I/Q modulators with integrated LO	100 to 4000	−110	−134.5	−40	−45	−160	11	30	600	5, 3.3	—	7 × 7 QFN	5A991.b	HMC1197LP7FE
ADRF6755	I/Q modulators with integrated LO	300 to 2310	−93	−133	−45	−45	−162	8	21	600	5	—	8 × 8 LFCSP	5A991.b	ADRF6755ACPZ
ADRF6701	I/Q modulators with integrated LO	400 to 1250	−113	−135	−45	−40	−159.7	11.2	31.7	750	5	—	6 × 6 LFCSP	5A991.b	ADRF6701ACPZ-R7
ADRF6720	I/Q modulators with integrated LO	700 to 3000	−91.5	−136.8	−40	−38	−157	12.7	35.7	1000	3.3	—	6 × 6 LFCSP	5A991.b	ADRF6720ACPZ-R7
ADRF6720-27	I/Q modulators with integrated LO	400 to 3000	−92.4	−136.8	−44	−40.8	−159.5	10.8	31.1	1000	3.3	—	6 × 6 LFCSP	5A991.b	ADRF6720-27ACPZ-R7
ADRF6750	I/Q modulators with integrated LO	950 to 1575	−93	−133	−45	−45	−162	8.5	23	600	5	—	8 × 8 LFCSP	5A991.b	ADRF6750ACPZ-R7
ADRF6702	I/Q modulators with integrated LO	1200 to 2400	−110.8	−124.6	−40	−53.9	−159.6	13.6	30.1	750	5	—	6 × 6 LFCSP	5A991.b	ADRF6702ACPZ-R7
ADRF6703	I/Q modulators with integrated LO	1550 to 2650	−98.8	−129.2	−40	−44	−159.7	13.5	32.7	750	5	—	6 × 6 LFCSP	5A991.b	ADRF6703ACPZ-R7
ADRF6704	I/Q modulators with integrated LO	2050 to 3000	−92.3	−125.2	−41	−37.7	−158.3	12.1	27.2	750	5	—	6 × 6 LFCSP	5A991.b	ADRF6704ACPZ-R7

I/Q Demodulators with Integrated LO

Part Number	Description	RF Frequency (MHz)	PLL Phase Noise @ 10 kHz Offset (dBc/Hz)	PLL Phase Noise @ 1 MHz Offset (dBc/Hz)	Gain Error (dB)	Phase Error (°)	Noise Figure (dB)	Input P1dB (dBm)	Input IP3 (dBm)	Baseband Bandwidth @ 3 dB (MHz)	V _s (V)	I _{sy} (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADRF6806	I/Q demodulator and frac-N PLL and VCO	50 to 525	—	—	0.1	0.5	12.2	12.2	28.5	170	3, 5	86, 270	6 × 6 LFCSP	5A991.b	ADRF6806ACPZ-R7
ADRF6850	I/Q demodulator and frac-N PLL and VCO	100 to 1000	−98	−136	0.1	0.5	11	12	22.5	300	3	350	8 × 8 LFCSP	5A991.b	ADRF6850BCPZ
ADRF6820	Broadband I/Q demodulator and frac-N PLL and VCO	695 to 2700	−94.7	−141.5	0.1	0.5	20	14.5	37	1400	3.3, 5	83, 310	6 × 6 LFCSP	5A991.b	ADRF6820ACPZ-R7
ADRF6807	I/Q demodulator and frac-N PLL and VCO	700 to 1050	−107	−137	0.1	0.5	13.1	12.8	26.7	170	3, 5	86, 227	6 × 6 LFCSP	5A991.b	ADRF6807ACPZ-R7
ADRF6801	I/Q demodulator and frac-N PLL and VCO	750 to 1150	−88.3	−138.6	0.05	0.3	14.3	12.5	25	275	5	262	6 × 6 LFCSP	5A991.b	ADRF6801ACPZ-R7

Integrated Transceivers, Transmitters, and Receivers

Microwave and Millimeter Wave Integrated Transmitters/Receivers

V-Band Transmitters/Receivers

Part Number	Description	Frequency (GHz)	I/Q Bandwidth (GHz)	Max Gain (dB)	RF Control Range (dB)	IF Control Range (dB)	IP3 Typ (dBm)	Image/Sideband Rejection (dBc)	Noise Figure (dB)	P1dB Typ (dBm)	Power Dissipation (W)	Package (mm)	ECCN Code	Ordering Part Number
HMC6300	60 GHz integrated transmitter	57 to 64	1.8	35	22	14	20 (OIP3)	40	—	12 (single-ended) 15 (balanced)	0.88 (single-ended) 1.0 (balanced)	BGA	5A991.h	HMC6300BG46
HMC6301	60 GHz integrated receiver	57 to 64	1.8	67	6	12 (analog) 15 (digital)	−9 (IIP3)	35	8	30	0.82 (single-ended) 0.57 (external LO)	BGA	5A991.h	HMC6301BG46

E-Band Transmitters/Receivers

Part Number	Description	RF (GHz)	LO (GHz)	IF (GHz)	Conversion Gain (dB)	IP3 (dBm)	Image/Sideband Rejection (dBc)	NF Typ (dB)	LO Drive Nominal (dBm)	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC7586	E-band I/Q Receiver	71 to 76	11.83 to 14.33	0 to 10	12.5	−1 (IIP3)	28	5	2	4, 1.5, 3	175, 80, 50	Die	5A991.b	HMC7586
HMC7587	E-band I/Q Receiver	81 to 86	11.83 to 14.33	0 to 10	10	−2 (IIP3)	30	6	2	4, 1.5, 3	175, 80, 50	Die	5A991.b	HMC7587
HMC8118	E-band I/Q upconverter	71 to 76	11.83 to 14.33	0 to 10	11	—	22	—	2	4, 1.5	175, 80	Die	5A991.b	HMC8118
HMC8119	E-band I/Q upconverter	81 to 86	11.83 to 14.33	0 to 10	10	—	22	—	2	4, 1.5	175, 80	Die	5A991.b	HMC8119

IF Subsystem Transmitters and Receivers

Part Number	Description	RF (MHz)	IF (MHz)	Conversion Gain (dB)	RF VGA Dynamic Range (dB)	IF VGA Dynamic Range (dB)	Output IP3 Typ (dBm)	Image Rejection (dBc)	Noise Figure (dB)	V _{SUPPLY} Typ (V)	I _{SUPPLY} Typ (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC8100 New	Intermediate frequency receiver	800 to 4000	80 to 200	85	47	49	18	36	5	3.3	600	6 × 6 LFCSP	5A991.b	HMC8100LP6JE
HMC8200 New	Intermediate frequency transmitter	800 to 4000	200 to 700	34	35	—	31	15	6	3.3	540	5 × 5 LFCSP	5A991.b	HMC8200LP5ME

24 GHz ADAS Radar Solution

Part Number	Description	Function	Frequency (GHz)	Figure of Merit (dBc/Hz)	PFD _{MAX} (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADF4158	6 GHz, frac-N FMCW ramping PLL	Ramp generator	0.5 to 6.1	−216	32	3	23	4 × 4 LFCSP	5A991.h	ADF4158CCPZ
ADF4159	13 GHz, frac-N FMCW ramping PLL	Ramp generator	0.5 to 13	−224	110	3	33	4 × 4 LFCSP	5A991.h	ADF4159CCPZ

Part Number	Description	Function	RF (MHz)	Signal Bandwidth (MHz)	Phase Noise @ 10 MHz Offset (dBc/Hz)	Output Power (dBm)	Input	ADC resolution	V _{TUNE} (V)	Power (W)	Package (mm)	ECCN Code	Ordering Part Number
ADF5901	ISM band, 2-ch FMCW transmitter	Tx MMIC	24 to 24.25	250	−128	2 to 10	Single-ended	8-bit	1 to 2.8	0.002	5 × 5 LFCSP	EAR 99	ADF5901WCCPZ


Part Number	Description	Function	RF (MHz)	Signal Bandwidth (MHz)	Rx Channel Gain (dB)	P1dB (dBm)	RF-IF Isolation (dB)	Noise Figure (dB)	Package (mm)	ECCN Code	Ordering Part Number
ADF5904	ISM band, 4-ch receiver	Rx MMIC	24 to 24.25	250	22	−10	30	10	5 × 5 LFCSP	EAR 99	ADF5904ACPZ

24 GHz ADAS Radar Solution (Continued)

Part Number	Description	Function	Sample Rate (MSPS)	Gain (dB)	Low-Pass Filter BW (MHz)	SNR (dB)	SFDR (dB)	Noise (nV/√Hz)	Antialiasing Filter	Power (W)	Package (mm)	ECCN Code	Ordering Part Number
AD8283	6-ch LNA/PGA/AAF with ADC	AFE	72	16 to 34 (programmable)	1 to 12 (programmable)	67	68	3.5	Included	0.17	10 × 10 LFCSP	—	AD8283WBCPZ
AD8284	6-ch LNA/PGA/AAF with ADC	AFE	60	17 to 35 (programmable)	9 to 15 (programmable)	67	68	3.5	Included	0.345	10 × 10 TQFP	—	AD8284WCSVZ
ADAR7251	4-ch, 16-bit, continuous time data acquisition ADC	AFE	0.3 to 1.2	0 to 45 (programmable)	—	—	—	2.4	Not required	0.4	7 × 7 LFCSP	—	ADAR7251WBCSZ

Part Number	Description	Function	Operating Frequency (MHz)	Core	On-Chip L1 SRAM (kB)	On-Chip L2 SRAM (MB)	On-Chip L2 ROM (kB)	On-Chip RAM (MB)	On-Chip ROM (MB)	Power (W)	Package (mm)	ECCN Code	Ordering Part Number
ADSP-BF70x	Low power ADSP-BF70x series of Blackfin+® embedded DSP processors with 512 kB L2 SRAM and DDR2/LPDDR interface	DSP	200 to 400	16-bit 32-bit	136	256	512	—	—	<1	12 × 12 LFCSP 12 × 12 BGA	—	—
ADSP-2147x	ADSP-2147x SHARC® DSP	DSP	200 to 300	32-bit 40-bit	—	—	—	2 to 5	4	—	LFCSP BGA	—	ADSP-2147xKCPZ-1A

24 GHz ISM Band Multichannel Radar Solution

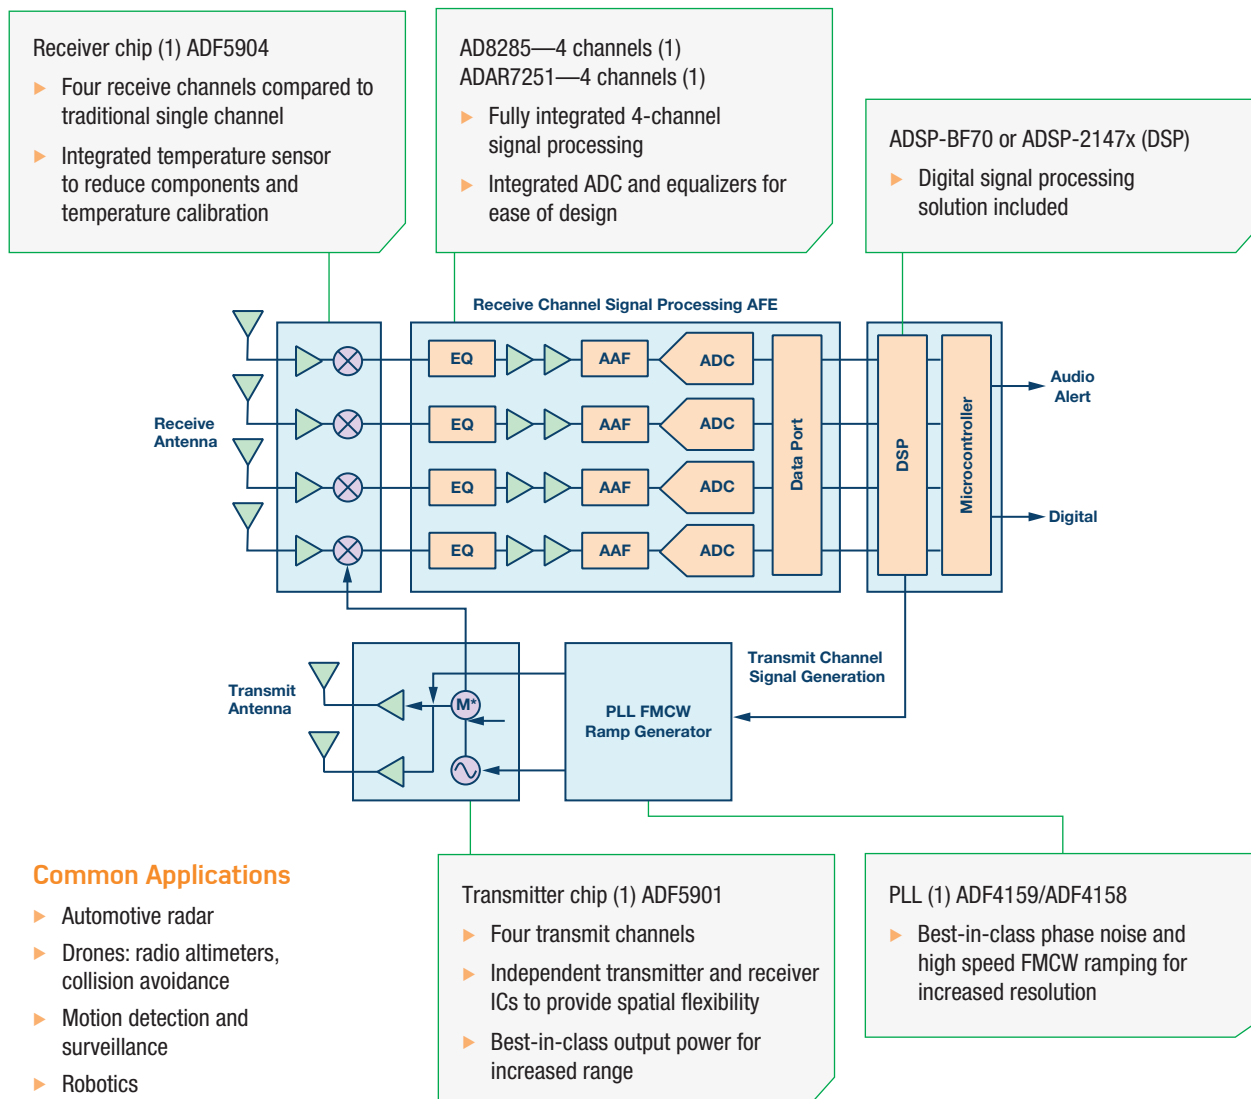

HMC6300: 57 GHz to 64 GHz Transmitter SMT Chipset (V-Band)**HMC6301: 57 GHz to 64 GHz Receiver SMT Chipset (V-Band)****Key Features****Transmitter (HMC6300)**

- ▶ High output power of
 - P_{1dB}: 15 dBm
 - P_{SAT}: 17 dBm
- ▶ Single-ended and differential output modes

Receiver (HMC6301)

- ▶ Noise figure of 7 dB
- ▶ Gain of up to 68 dB
- ▶ Programmable baseband gain and filter bandwidth

Common Features


- ▶ Frequency coverage of 57 GHz to 64 GHz
- ▶ Wafer level ball grid array (WLPGA) package
- ▶ On-chip temperature sensor
- ▶ Integrated frequency synthesizer
- ▶ Support for up to 256 QAM with external LO
- ▶ SPI control
- ▶ Integrated synthesizer capable of 64 QAM
- ▶ External LO capability for modulations up to 256 QAM
- ▶ Continuous analog and digital gain control
- ▶ RF bandwidth up to 1.8 GHz supported
- ▶ Supports FDD or TDD through an external switch

Benefits

- ▶ Surface-mount packaging eliminates costly chip and wire assembly
- ▶ Single transmitter and receiver for entire V-band backhaul radio signal chain
- ▶ Flexibility to operate in single-ended mode for direct interface or differential output mode for higher power
- ▶ Increased flexibility and industry-leading performance with option to use external LO

Common Applications

- ▶ Small cell backhaul
- ▶ 60 GHz ISM band data transfer
- ▶ Multi-Gbps data communication
- ▶ WiGig/802.11ad radio
- ▶ High definition video transmission
- ▶ Radar/high resolution imaging

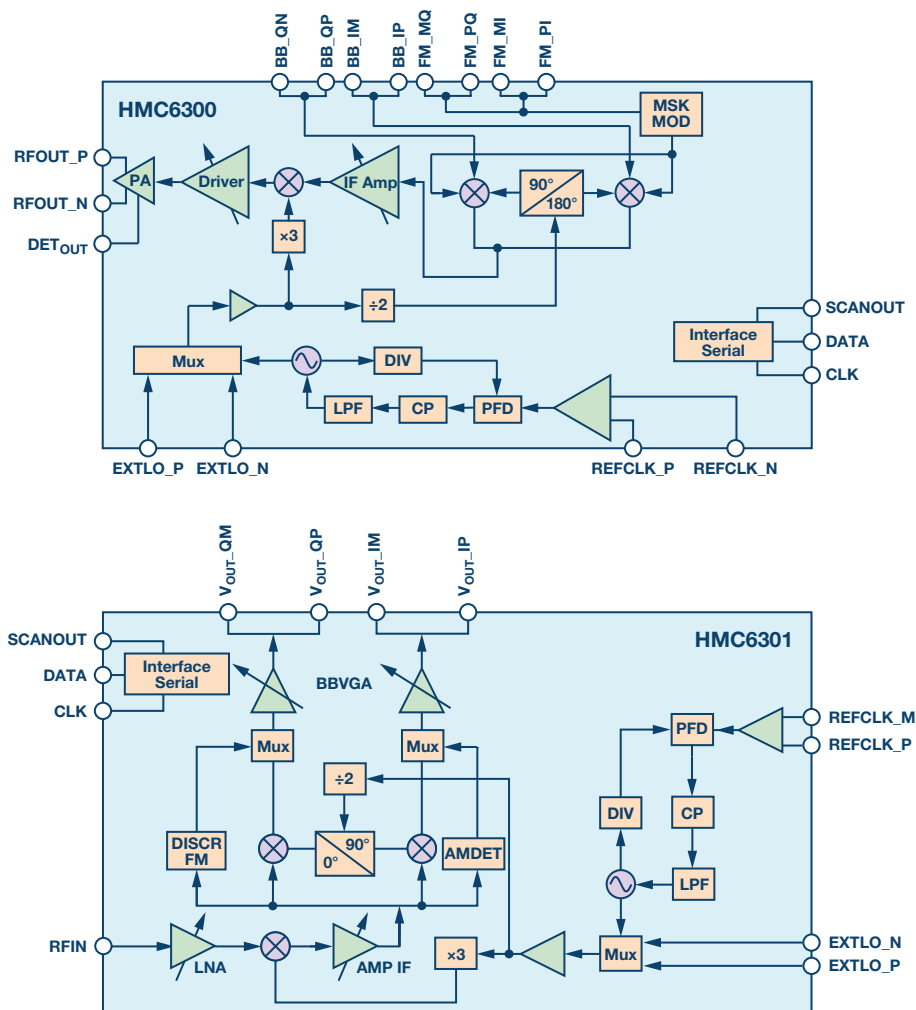

HMC8100: 0.8 GHz to 4 GHz Intermediate Frequency Receiver

HMC8200: 0.8 GHz to 4 GHz Intermediate Frequency Transmitter

Key Features

- ▶ High linearity: support modulations to 1024 QAM
- ▶ Receiver IF range: 80 MHz to 200 MHz
- ▶ Receiver RF range: 800 MHz to 4000 MHz
- ▶ Receiver power control range: 80 dB
- ▶ SPI programmable band-pass filters
- ▶ SPI controlled interface
- ▶ Transmitter IF range: 200 MHz to 700 MHz
- ▶ Transmitter RF range: 800 MHz to 4000 MHz
- ▶ Transmitter power control range: 25 dB



Benefits

- ▶ Up to 75% reduction in board area and 30% reduction in solution cost, using a single IC with complete IF subsystem
- ▶ No need for external switches or filters
- ▶ Flexibility of heterodyne or ZIF architecture
- ▶ Improved sensitivity due to 6 dB better NF

Common Applications

- ▶ Microwave point-to-point or point-to-multipoint radios
- ▶ Military systems and electronic radars requiring improved sensitivity
- ▶ Small form factor test and measurement instrumentation

LO Frequency Range	Input Impedance	Power Conversion Gain	Temperature Range	Package	Price @ 1k (\$U.S.)
600 MHz to 2000 MHz	50 Ω (typical)	86 dB (typical)	-40°C to +85°C	40-lead LFCSP, 32-lead LFCSP	HMC8100: 19.98 HMC8200: 17.06

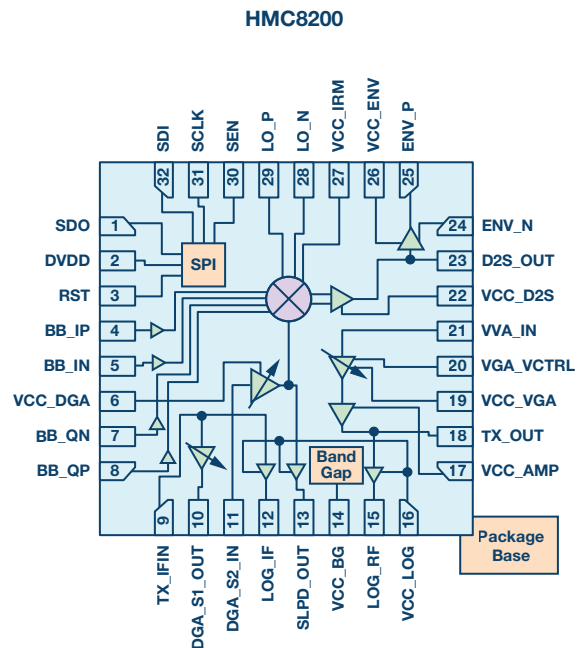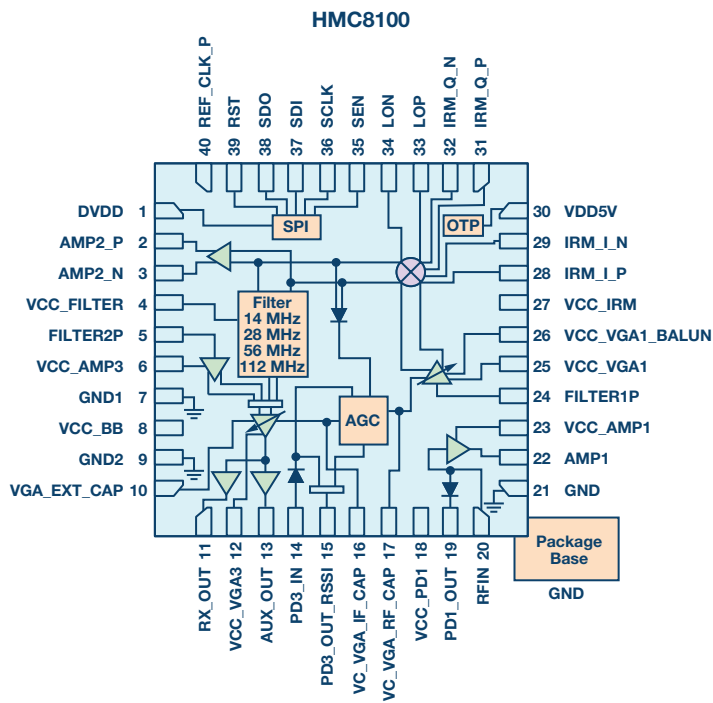

PLL/Synthesizers

Integer-N PLLs

Part Number	Description	Frequency (GHz)	Figure of Merit (dBc/Hz)	PFD _{MAX} (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC1031	Integer-N	0 to 0.5	-208	140	3	2	MSOP	EAR 99	HMC1031MS8E
ADF4002	Integer-N	0.005 to 0.4	-222	104	3	5	4 × 4 LFCSP	5A991.b	ADF4002BCPZ-RL7
ADF4001	Integer-N	0.01 to 0.2	-217	—	2.7 to 5.5	4.5	4 × 4 LFCSP	5A991.b	ADF4001BCPZ-RL7
HMC440	Integer-N	0.01 to 2.8	-233	1300	5	250	QSOP	3A001.a.11.b	HMC440QS16GE
HMC4069 <i>New</i>	Integer-N	0.01 to 2.9	-233	1300	5	295	4 × 4 LFCSP	3A001.a.11.b	HMC4069LP4E
ADF4110	Integer-N	0.05 to 0.55	-213	—	2.7 to 5.5	4.5	4 × 4 LFCSP	5A991.b	ADF4110BCPZ-RL7
ADF4116	Integer-N	0.08 to 0.55	-211	55	2.7 to 5.5	4.5	TSSOP	5A991.b	ADF4116BRUZ-REEL7
ADF4111	Integer-N	0.08 to 1.2	-213	—	2.7 to 5.5	4.5	TSSOP	5A991.b	ADF4111BRUZ-RL7
HMC698	Integer-N	0.08 to 7	-233	1300	5	310	5 × 5 QFN	3A001.a.11.b	HMC698LP5E
ADF4117	Integer-N	0.1 to 1.2	-213	55	2.7 to 5.5	4.5	TSSOP	5A991.b	ADF4117BRUZ
ADF4118	Integer-N	0.1 to 3	-216	55	2.7 to 5.5	6.5	TSSOP	5A991.b	ADF4118YRUZ-RL7
HMC699	Integer-N	0.16 to 7	-233	1300	5	310	5 × 5 QFN	3A001.a.11.b	HMC699LP5E
ADF4212L	Integer-N	0.2 to 2.4	-215	75	3	7.5	TSSOP	5A991.b	ADF4212LBRUZ
ADF4113	Integer-N	0.2 to 3.7	-217	—	2.7 to 5.5	8.5	4 × 4 LFCSP	5A991.b	ADF4113BCPZ-RL7
ADF4113HV	Integer-N	0.2 to 3.7	-212	5	2.7 to 5.5	11	4 × 4 LFCSP	5A991.b	ADF4113HVBBCPZ-RL7
LTC6945	Integer-N	0.35 to 6	-226	100	3.3	110	4 × 5 QFN	EAR 99	LTC6945IUFD#TRPBF
ADF4106	Integer-N	0.5 to 6	-223	104	3	13	4 × 4 LFCSP	5A991.b	ADF4106BCPZ-R7
ADF4107	Integer-N	1 to 7	-223	104	3	17	4 × 4 LFCSP	5A991.b	ADF4107BCPZ-REEL7
ADF4007	Integer-N	1 to 7.5	-219	120	3	15	4 × 4 LFCSP	5A991.b	ADF4007BCPZ-RL7
ADF4108	Integer-N	1 to 8	-223	104	3	15	4 × 4 LFCSP	5A991.b	ADF4108BCPZ-RL7
ADF41020	Integer-N	4 to 18	-221	100	3	30	4 × 4 LFCSP	5A991.b	ADF41020BCPZ-RL7

Fractional-N/Integer-N PLLs

Part Number	Description	Frequency (GHz)	Figure of Merit (dBc/Hz)	PFD _{MAX} (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC702	Frac-N with sweeper	~0 to 14	-221	70	3.3, 5	135, 26	6 × 6 LFCSP	EAR 99	HMC702LP6CE
HMC704	Frac-N	~0 to 8	-230	100	3.3, 5	52, 6	4 × 4 LFCSP	EAR 99	HMC704LP4E
HMC703	Frac-N with sweeper	~0 to 8	-230	100	3.3, 5	54, 7	4 × 4 LFCSP	EAR 99	HMC703LP4E
HMC701	Frac-N with sweeper	~0 to 8	-221	70	3.3, 5	90, 37	6 × 6 LFCSP	EAR 99	HMC701LP6CE
HMC700	Frac-N with sweeper	~0 to 8	-221	70	3.3, 5	90, 5.5	4 × 4 LFCSP	EAR 99	HMC700LP4E
ADF4150	Frac-N/integer-N PLLs	0.01 to 0.25	-223	32	3.3	50	4 × 4 LFCSP	5A991.b	ADF4150BCPZ-RL7
ADF4151	Integer-N and frac-N	0.01 to 0.25	-221	32	3.3	42	5 × 5 LFCSP	5A991.b	ADF4151BCPZ-RL7
ADF4150HV	Frac-N/integer-N PLL, 30 V charge pump	0.01 to 0.3	-213	26	3.3	50	5 × 5 LFCSP	5A991.b	ADF4150HVBBCPZ-RL7
ADF4152HV <i>New</i>	Frac-N/integer-N PLL, 30 V charge pump	0.5 to 5	-213	26	3.3	50	5 × 5 LFCSP	5A991.b	ADF4152HV
ADF4155	Integer-N and frac-N	0.1 to 0.6	-223	125	3.3	38	4 × 4 LFCSP	5A991.b	ADF4155BCPZ-RL7
ADF4252	Frac-N/integer-N PLLs	0.25 to 3	-214	RF_PFD 30 IF_PFD 55	3	13	4 × 4 LFCSP	5A991.b	ADF4252BCPZ-R7
LTC6947	Frac-N/integer-N PLLs	0.35 to 6	-226	76/100	3.3	110	4 × 5 QFN	EAR 99	LTC6947IUFD#TRPBF
ADF4193	Frac-N/integer-N PLLs	0.4 to 3.5	-216	30	3	68	5 × 5 LFCSP	5A991.h	ADF4193RL7
ADF4196	Integer-N and frac-N	0.4 to 6	-216	25	3	68	5 × 5 LFCSP	5A991.b	ADF4196BCPZ-RL7
ADF4153A	Frac-N/integer-N PLLs	0.5 to 4	-223	32	3	20	TSSOP	5A991.b	ADF4153ABRUZ
ADF4153A	Frac-N/integer-N PLLs	0.5 to 4	-223	32	3	20	4 × 4 LFCSP	5A991.b	ADF4153ABCPZ-RL7
ADF4153	Frac-N/integer-N PLLs	0.5 to 4	-220	32	3	20	TSSOP	5A991.b	ADF4153BRUZ-RL7
ADF4153	Frac-N/integer-N PLLs	0.5 to 4	-220	32	3	20	4 × 4 LFCSP	5A991.b	ADF4153BCPZ-RL7
ADF4154	Frac-N/integer-N PLLs	0.5 to 4	-220	32	3	20	TSSOP	5A991.b	ADF4154BRUZ-RL7
ADF4154	Frac-N/integer-N PLLs	0.5 to 4	-220	32	3	20	4 × 4 LFCSP	5A991.b	ADF4154BCPZ-RL7
ADF4157	Frac-N/integer-N PLLs	0.5 to 6	-211	32	3	23	TSSOP	5A991.b	ADF4157BRUZ-RL7
ADF4157	Frac-N/integer-N PLLs	0.5 to 6	-211	32	3	23	4 × 4 LFCSP	5A991.b	ADF4157BCPZ-RL7
ADF4158	Integer-N and frac-N	0.5 to 6.1	-216	32	3	23	4 × 4 LFCSP	5A991.b	ADF4158CCPZ-RL7
ADF4156	Frac-N	0.5 to 6.2	-220	32	3	26	TSSOP	5A991.b	ADF4156BRUZ-RL7
ADF4156	Frac-N	0.5 to 6.2	-220	32	3	26	4 × 4 LFCSP	5A991.b	ADF4156BCPZ-RL7
ADF4159	Swept frequency integer-N and frac-N	0.5 to 13	-224	110	3	33	4 × 4 LFCSP	5A991.b	ADF4159CCPZ-RL7
ADF4169	Frac-N/integer-N PLLs	0.5 to 13.5	-224	130	3.3	65	4 × 4 LFCSP	5A991.b	ADF4169CCPZ-RL7

Integer-N PLLs with Integrated VCO

Part Number	Description	Frequency (GHz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	Divider	VCO Tuning Inductor	Figure of Merit (dBc/Hz)	PFD _{MAX} (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADF4360-9	Integer-N PLLs with VCO	~0 to 0.2	-120	/2 to /62	Ext L sets frequency range	-218	8	3.3	20 to 40	4 × 4 LFCSP	5A991.b	ADF4360-9BCPZRL7
ADF4360-8	Integer-N PLLs with VCO	0.065 to 0.4	-120	No	Ext L sets frequency range	-216	8	3.3	20 to 40	4 × 4 LFCSP	5A991.b	ADF4360-8BCPZRL7
ADF4360-7	Integer-N PLLs with VCO	0.35 to 1.8	-116	/1, /2	Ext L sets frequency range	-216	8	3.3	25 to 45	4 × 4 LFCSP	5A991.b	ADF4360-7BCPZRL7
LTC6946-1	Integer-N PLLs with VCO	0.373 to 3.74	-110	/1 to /6	Internal	-226	100	3.3/5	80/40	4 × 5 QFN	EAR 99	LTC6946IUFD-1#TRPBF
LTC6946-2	Integer-N PLLs with VCO	0.513 to 4.91	-110	/1 to /6	Internal	-226	100	3.3/5	80/40	4 × 5 QFN	EAR 99	LTC6946IUFD-2#TRPBF
LTC6946-3	Integer-N PLLs with VCO	0.640 to 5.79	-110	/1 to /6	Internal	-226	100	3.3/5	80/40	4 × 5 QFN	EAR 99	LTC6946IUFD-3#TRPBF
LTC6946-4	Integer-N PLLs with VCO	0.700 to 6.39	-110	/1 to /6	Internal	-226	100	3.3/5	80/40	4 × 5 QFN	EAR 99	LTC6946IUFD-4#TRPBF
ADF4360-6	Integer-N PLLs with VCO	1.05 to 1.25	-110	/1, /2	Internal	-216	8	3.3	25 to 45	4 × 4 LFCSP	5A991.b	ADF4360-6BCPZRL7
ADF4360-5	Integer-N PLLs with VCO	1.2 to 1.4	-110	/1, /2	Internal	-216	8	3.3	25 to 45	4 × 4 LFCSP	5A991.b	ADF4360-5BCPZRL7
ADF4360-4	Integer-N PLLs with VCO	1.45 to 1.75	-110	/1, /2	Internal	-216	8	3.3	25 to 50	4 × 4 LFCSP	5A991.b	ADF4360-4BCPZRL7
ADF4360-3	Integer-N PLLs with VCO	1.6 to 1.95	-110	/1, /2	Internal	-216	8	3.3	25 to 50	4 × 4 LFCSP	5A991.b	ADF4360-3BCPZRL7
ADF4360-2	Integer-N PLLs with VCO	1.85 to 2.17	-110	/1, /2	Internal	-216	8	3.3	25 to 50	4 × 4 LFCSP	5A991.b	ADF4360-2BCPZRL7
ADF4360-1	Integer-N PLLs with VCO	2.05 to 2.45	-110	/1, /2	Internal	-216	8	3.3	25 to 50	4 × 4 LFCSP	5A991.b	ADF4360-1BCPZRL7
ADF4360-0	Integer-N PLLs with VCO	2.4 to 2.75	-110	/1, /2	Internal	-216	8	3.3	25 to 50	4 × 4 LFCSP	5A991.b	ADF4360-0BCPZRL7

Narrow-Band RF Fractional-N/Integer-N PLLs with VCO

Part Number	Description	Frequency (GHz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	VCO Phase Noise @ 1 MHz (dBc/Hz)	P _{OUT} (dBm)	Figure of Merit (dBc/Hz)	PFD _{MAX} Frac-N Mode (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC824	Frac-N PLL	0.78 to 0.87	-123	-148	14	-229	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC824LP6CE
HMC826	Frac-N PLL	0.99 to 1.105	-121	-146	11	-229	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC826LP6CE
HMC828	Frac-N PLL	1.285 to 1.415	-118	-143	10	-229	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC828LP6CE
HMC831	Frac-N PLL	1.815 to 2.01	-118	-143	7.5	-229	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC831LP6CE
HMC836	Frac-N PLL	3.365 to 3.705	-111	-136	0	-227	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC836LP6CE
HMC822	Frac-N PLL, triband VCO	0.665 to 0.825 1.33 to 1.65 2.66 to 3.3	-124 -118 -112	-148 -142 -136	+11 +6.5 +4	-229	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC822LP6CE
HMC838	Frac-N PLL, triband VCO	0.795 to 0.945 1.59 to 1.89 3.18 to 3.78	-123 -118 -112	-148 -118 -112	+10 +7.5 -4	-229	fvco/20	3.3/5	51/77	6 × 6 LFCSP	EAR 99	HMC838LP6CE
HMC821	Frac-N PLL, triband VCO	0.86 to 1.04 1.72 to 2.08 3.44 to 4.16	-122 -116 -110	-147 -141 -135	+10 +6.5 -4	-227	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC821LP6CE
HMC837	Frac-N PLL, triband VCO	1.025 to 1.15 2.05 to 2.3 4.1 to 4.6	-120 -114 -108	-147 -141 -135	+12 +10.5 -0.5	-230	fvco/20	3.3/5	47/94	6 × 6 LFCSP	EAR 99	HMC837LP6CE
HMC839	Frac-N PLL, triband VCO	1.05 to 1.205 2.1 to 2.41 4.2 to 4.82	-121 -116 -109	-146 -140 -135	+10 +7.5 -4	-229	fvco/20	3.3/5	51/78	6 × 6 LFCSP	EAR 99	HMC839LP6CE
HMC820	Frac-N PLL, triband VCO	1.095 to 1.275 2.19 to 2.55 4.38 to 5.1	-122 -116 -110	-147 -141 -135	+10 +6.5 -4	-227	fvco/20	3.3/5	51/97	6 × 6 LFCSP	EAR 99	HMC820LP6CE
HMC840	Frac-N PLL, triband VCO	1.31 to 1.415 2.62 to 2.83	-117 -111	-145 -139	+10 +9	-230	fvco/20	3.3/5	47/97	6 × 6 LFCSP	EAR 99	HMC840LP6CE

Narrow-Band Fractional-N/Integer-N PLLs with Integrated VCO

Part Number	Description	Frequency (GHz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	P _{OUT} (dBm)	Figure of Merit (dBc/Hz)	PFD _{MAX} Frac-N Mode (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC764	Wideband frac-N/integer-N PLL and VCO	7.3 to 8.2	-140	15	-226	70	3.3/5	90/245	6 × 6 LFCSP	EAR 99	HMC764LP6CE
HMC765	Wideband frac-N/integer-N PLL and VCO	7.8 to 8.8	-140	13	-226	70	3.3/5	90/245	6 × 6 LFCSP	EAR 99	HMC765LP6CE
HMC767	Wideband frac-N/integer-N PLL and VCO	8.45 to 9.55	-138	12	-230	100	3.3/5	54/257	6 × 6 LFCSP	EAR 99	HMC767LP6CE
HMC769	Wideband frac-N/integer-N PLL and VCO	9.05 to 10.15	-140	12	-230	100	3.3/5	54/272	6 × 6 LFCSP	EAR 99	HMC769LP6CE
HMC778	Wideband frac-N/integer-N PLL and VCO	9.6 to 10.8	-140	9	-230	100	3.3/5	54/272	6 × 6 LFCSP	EAR 99	HMC778LP6CE
HMC783	Wideband frac-N/integer-N PLL and VCO	11.5 to 12.5	-134	10	-226	70	3.3/5	90/145	6 × 6 LFCSP	EAR 99	HMC783LP6CE
HMC807	Wideband frac-N/integer-N PLL and VCO	12.4 to 13.4	-132	8	-226	70	3.3/5	90/205	6 × 6 LFCSP	EAR 99	HMC807LP6CE

Wideband Fractional-N/Integer-N PLLs with Integrated VCO

Part Number	Description	Frequency (GHz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	VCO Phase Noise @ 1 MHz (dBc/Hz)	Figure of Merit (dBc/Hz)	PFD _{MAX} Frac-N Mode (MHz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC832	Wideband frac-N/integer-N PLL and VCO	0.025 to 3	-116	-139	-226	100	3.3	219	6 × 6 LFCSP	5A991.b	HMC832LP6GE
HMC830	Wideband frac-N/integer-N PLL and VCO	0.025 to 3	-116	-141	-227	100	3.3/5	52/185	6 × 6 LFCSP	5A991.b	HMC830LP6GE
LTC6948-1	Wideband frac-N/integer-N PLL and VCO	0.373 to 3.74	-110	-130	-225	76	3.3/5	90/40	4 × 5 QFN	EAR 99	LTC6948IUFD-1#TRPBF
HMC835	Wideband frac-N/integer-N PLL and VCO	0.033 to 4.1	-108	-134	-227	100	3.3/5	48/220	6 × 6 LFCSP	5A991.b	HMC835LP6GE
HMC829	Wideband frac-N/integer-N PLL and VCO	0.045 to 1.05 1.4 to 2.1 2.8 to 4.2	-108	-134	-227	100	3.3/5	52/185	6 × 6 LFCSP	EAR 99	HMC829LP6GE
ADF4355-2	Wideband frac-N/integer-N PLL and VCO	0.055 to 4.4	-120	-142	-222	125	3.3/5	110/80	5 × 5 LFCSP	5A991.g	ADF4355-2BCPZ
ADF4351	Wideband frac-N/integer-N PLL and VCO	0.035 to 4.4	-114	-134	-221	32	3.3	112 to 148	5 × 5 LFCSP	5A991.b	ADF4351BCPZ
ADF4350	Wideband frac-N/integer-N PLL and VCO	0.1375 to 4.4	-114	-134	-220	32	3.3	112 to 136	5 × 5 LFCSP	5A991.b	ADF4350BCPZ
LTC6948-2	Wideband frac-N/integer-N PLL and VCO	0.513 to 4.91	-105	-128	-225	76	3.3/5	90/40	4 × 5 QFN	EAR 99	LTC6948IUFD-2#TRPBF
LTC6948-3	Wideband frac-N/integer-N PLL and VCO	0.640 to 5.79	-103	-125	-225	76	3.3/5	90/40	4 × 5 QFN	EAR 99	LTC6948IUFD-3#TRPBF
HMC833	Wideband frac-N/integer-N PLL and VCO	0.025 to 6	-116	-141	-227	100	3.3/5	52/185	6 × 6 LFCSP	EAR 99	HMC833LP6GE
LTC6948-4	Wideband frac-N/integer-N PLL and VCO	0.700 to 6.39	-100	-122	-225	76	3.3/5	90/40	4 × 5 QFN	EAR 99	LTC6948IUFD-4#TRPBF
ADF4355-3	Wideband frac-N/integer-N PLL and VCO	5.156 to 6.6	-118	-140	-222	125	3.3	146	5 × 5 LFCSP	5A991.b	ADF4355-3BCPZ
ADF4355	Wideband frac-N/integer-N PLL and VCO	0.055 to 6.8	-120	-142	-222	125	3.3/5	110/80	5 × 5 LFCSP	5A991.b	ADF4355BCPZ
ADF4356 New	Wideband frac-N/integer-N PLL and VCO	0.053 to 6.8	-115	-137	-227	125	3.3/5	110/80	6 × 5 LFCSP	5A991.b	ADF4356BCPZ
HMC834	Wideband frac-N/integer-N PLL and VCO	0.045 to 1.05 1.4 to 2.1 2.8 to 4.2 5.6 to 8.4	-108	-134	-227	100	3.3/5	52/185	6 × 6 LFCSP	EAR 99	HMC834LP6GE
ADF5355	Wideband frac-N/integer-N PLL and VCO	0.054 to 13.6	-107	-129	-221	125	3.3/5	110/80	5 × 5 LFCSP	5A991.b	ADF5355BCPZ

ADF4355: 6.8 GHz Wideband Synthesizer with Integrated VCO

Key Features

- ▶ RF output frequency range: 54 MHz to 6800 MHz
- ▶ Fractional-N synthesizer and integer-N synthesizer
- ▶ High resolution 38-bit modulus
- ▶ -148 dBc/Hz @ 1 MHz phase noise
- ▶ Programmable divide by 1, 2, 4, 8, 16, 32, or 64 output
- ▶ Analog and digital supply of 3.3 V
- ▶ Charge pump and VCO power supplies: 5.0 V typical
- ▶ Logic compatibility: 1.8 V
- ▶ Programmable output power level
- ▶ RF output mute function
- ▶ 3-wire serial interface
- ▶ Analog and digital lock detect


Benefits

- ▶ Integrated PLL/VCO reduces board space, design complexity, and cost
- ▶ Equivalent phase noise to high performance legacy GaAs VCOs
- ▶ Low phase noise due to high PFD frequency

Common Applications

- ▶ LO for communications infrastructure base station applications
- ▶ High performance clock for ADC/DAC
- ▶ Low phase noise LO signal for test and measurement instrumentation

Max Frequency	Continuous Range Without Gaps	PLL Figure of Merit	Temperature Range	Package	Price @ 1k (\$U.S.)
6800 MHz	6746 MHz	-221 dBc/Hz	-40°C to $+85^{\circ}\text{C}$	32-lead LFCSP	20.44

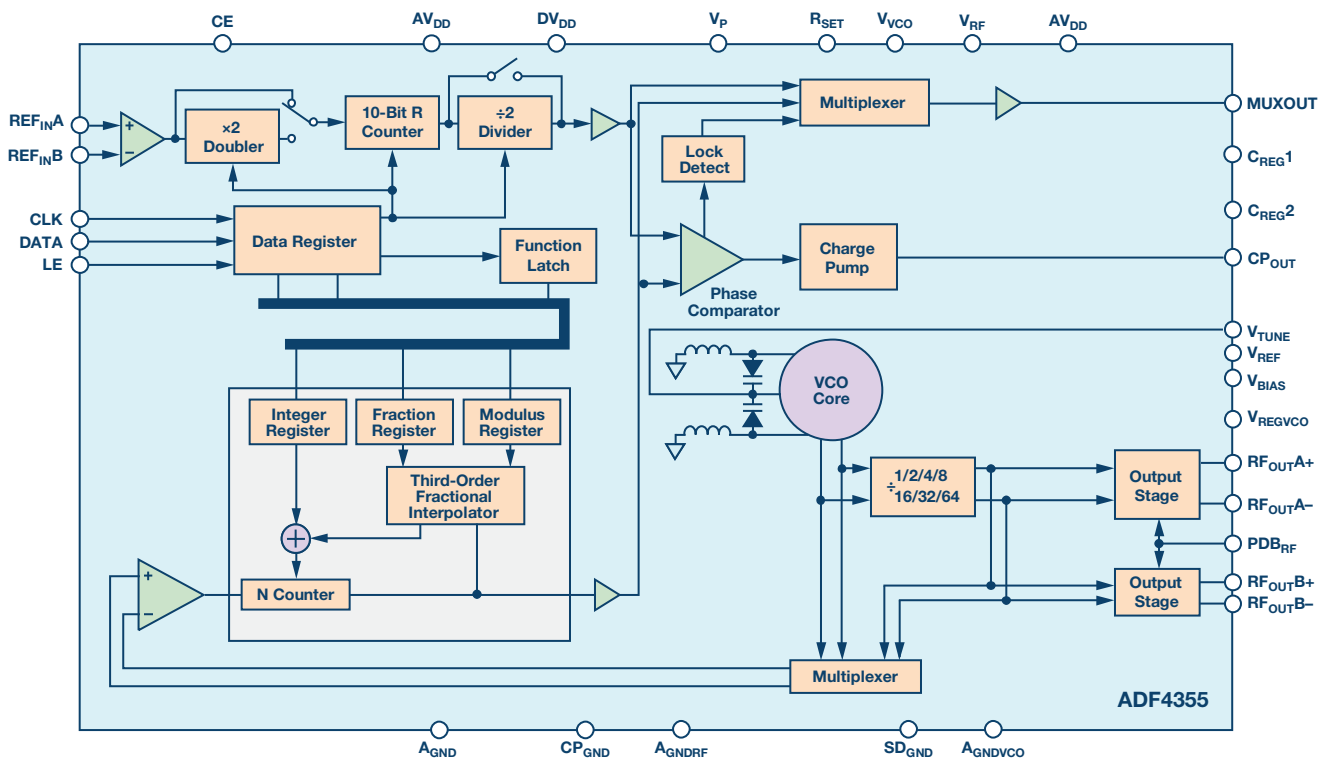

Voltage Controlled Oscillators

Low Current VCOs

Part Number	Description	Frequency (GHz)	VCO Phase Noise @ 10 kHz (dBc/Hz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	P _{OUT} (dBm)	V _{TUNE} (V)	V _{CC} (V)	I _{CC} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC384	With buffer	2.05 to 2.25	-89	-112	3.5	0 to 10	3	35	4 × 4 LFCSP	EAR 99	HMC384LP4E
HMC385	With buffer	2.25 to 2.5	-89	-115	4.5	0 to 10	3	35	4 × 4 LFCSP	EAR 99	HMC385LP4E
HMC386	With buffer	2.6 to 2.8	-88	-115	5	0 to 10	3	35	4 × 4 LFCSP	EAR 99	HMC386LP4E
HMC416	With buffer	2.75 to 3	-89	-114	4.5	0 to 10	3	37	4 × 4 LFCSP	EAR 99	HMC416LP4E
HMC388	With buffer	3.15 to 3.4	-88	-113	4.9	0 to 10	3	39	4 × 4 LFCSP	EAR 99	HMC388LP4E
HMC389	With buffer	3.35 to 3.55	-89	-112	4.7	0 to 10	3	41	4 × 4 LFCSP	EAR 99	HMC389LP4E
HMC390	With buffer	3.55 to 3.9	-87	-112	4.7	0 to 10	3	42	4 × 4 LFCSP	EAR 99	HMC390LP4E
HMC391	With buffer	3.9 to 4.45	-81	-106	5	0 to 10	3	30	4 × 4 LFCSP	EAR 99	HMC391LP4E
HMC429	With buffer	4.45 to 5	-79	-105	4	0 to 10	3	30	4 × 4 LFCSP	EAR 99	HMC429LP4E
HMC430	With buffer	5 to 5.5	-80	-103	2	0 to 10	3	27	4 × 4 LFCSP	EAR 99	HMC430LP4E
HMC431	With buffer	5.5 to 6.1	-80	-102	2	0 to 10	3	27	4 × 4 LFCSP	EAR 99	HMC431LP4E
HMC358	With buffer	5.8 to 6.8	-82	-110	11	0 to 10	3	100	MSOP	EAR 99	HMC358MS8GE
HMC466	With buffer	6.1 to 6.72	-73	-101	4.5	0 to 10	3	13	4 × 4 LFCSP	EAR 99	HMC466LP4E
HMC505	With buffer	6.8 to 7.4	-80	-106	11	1 to 11	3	80	4 × 4 LFCSP	EAR 99	HMC505LP4E
HMC532	With buffer	7.1 to 7.9	-80	-101	14	1 to 13	3	85	4 × 4 LFCSP	EAR 99	HMC532LP4E
HMC506	With buffer	7.8 to 8.7	-80	-103	14	1 to 11	3	77	4 × 4 LFCSP	EAR 99	HMC506LP4E

High Performance VCOs

Part Number	Description	Frequency (GHz)	Primary Divide Output (MHz)	VCO Phase Noise @ 10 kHz (dBc/Hz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	P _{OUT} (dBm)	V _{TUNE} (V)	V _{CC} (V)	I _{CC} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC507	With f0/2	6.65 to 7.65	3.325 to 3.825	-90	-115	13	2 to 13	5	230	5 × 5 LFCSP	EAR 99	HMC507LP5E
HMC508	With f0/2	7.3 to 8.2	3.65 to 4.1	-90	-116	15	2 to 13	5	240	5 × 5 LFCSP	EAR 99	HMC508LP5E
HMC509	With f0/2	7.8 to 8.8	3.9 to 4.4	-90	-115	13	2 to 13	5	250	5 × 5 LFCSP	EAR 99	HMC509LP5E
HMC1160	With f0/2	8.45 to 9.3	4.225 to 4.65	-90	-116	12	2 to 13	5	260	5 × 5 LFCSP	EAR 99	HMC1160LP5E
HMC510	With f0/2 and divide by 4	8.45 to 9.55	4.225 to 4.775	-92	-116	13	2 to 13	5	315	5 × 5 LFCSP	3A001.a.11.b	HMC510LP5E
HMC1161	With f0/2	8.71 to 9.55	4.355 to 4.775	-90	-115	11	2 to 13	5	250	5 × 5 LFCSP	EAR 99	HMC1161LP5E
HMC511	With f0/2	9.05 to 10.15	4.525 to 5.075	-88	-115	13	2 to 13	5	265	5 × 5 LFCSP	EAR 99	HMC511LP5E
HMC1162	With f0/2	9.25 to 10.1	4.625 to 5.05	-86	-115	11	2 to 13	5	230	5 × 5 LFCSP	EAR 99	HMC1162LP5E
HMC530	With f0/2 and divide by 4	9.5 to 10.8	4.75 to 5.4	-85	-110	11	2 to 13	5	350	5 × 5 LFCSP	3A001.a.11.b	HMC530LP5E
HMC512	With f0/2 and divide by 4	9.6 to 10.8	4.8 to 5.4	-85	-111	9	2 to 13	5	330	5 × 5 LFCSP	3A001.a.11.b	HMC512LP5E
HMC1163	With f0/2	9.65 to 10.41	4.825 to 5.205	-87	-114	11	2 to 13	5	205	5 × 5 LFCSP	EAR 99	HMC1163LP5E
HMC1164	With f0/2	10.38 to 11.3	5.19 to 5.65	-86	-114	8	2 to 13	5	200	5 × 5 LFCSP	EAR 99	HMC1164LP5E
HMC513	With f0/2 and divide by 4	10.43 to 11.46	5.215 to 5.73	-85	-110	7	2 to 13	5	275	5 × 5 LFCSP	3A001.a.11.b	HMC513LP5E
HMC534	With f0/2 and divide by 4	10.6 to 11.8	5.3 to 5.9	-82	-110	11	2 to 13	5	350	5 × 5 LFCSP	3A001.a.11.b	HMC534LP5E
HMC1165	With f0/2	11.07 to 11.62	5.535 to 5.81	-88	-113	8	2 to 13	5	210	5 × 5 LFCSP	EAR 99	HMC1165LP5E
HMC582	With f0/2 and divide by 4	11.1 to 12.4	5.55 to 6.2	-83	-110	9	2 to 13	5	350	5 × 5 LFCSP	3A001.a.11.b	HMC582LP5E
HMC514	With f0/2 and divide by 4	11.17 to 12.02	5.585 to 6.01	-87	-110	7	2 to 13	3	275	5 × 5 LFCSP	EAR 99	HMC514LP5E
HMC1166	With f0/2	11.41 to 12.62	5.705 to 6.31	-89	-115	11	2 to 13	5	220	5 × 5 LFCSP	EAR 99	HMC1166LP5E
HMC515	With f0/2 and divide by 4	11.5 to 12.5	5.75 to 6.25	-83	-110	10	2 to 13	5	200	5 × 5 LFCSP	3A001.a.11.b	HMC515LP5E
HMC583	With f0/2 and divide by 4	11.5 to 12.8	5.75 to 6.4	-80	-110	11	2 to 13	5	350	5 × 5 LFCSP	3A001.a.11.b	HMC583LP5E
HMC1167	With f0/2	12.17 to 13.3	6.085 to 6.65	-86	-113	10	2 to 13	5	200	5 × 5 LFCSP	EAR 99	HMC1167LP5E
HMC529	With f0/2 and divide by 4	12.4 to 13.4	6.2 to 6.7	-83	-110	8	2 to 13	5	260	5 × 5 LFCSP	3A001.a.11.b	HMC529LP5E
HMC1168	With f0/2	12.47 to 13.72	6.235 to 6.86	-85	-113	10	2 to 13	5	190	5 × 5 LFCSP	EAR 99	HMC1168LP5E
HMC584	With f0/2 and divide by 4	12.5 to 13.9	6.25 to 6.95	-81	-110	10	2 to 13	5	330	5 × 5 LFCSP	3A001.a.11.b	HMC584LP5E
HMC1169	With f0/2	12.92 to 14.07	6.46 to 7.035	-86	-113	11	2 to 13	5	220	5 × 5 LFCSP	EAR 99	HMC1169LP5E
HMC531	With f0/2 and divide by 4	13.6 to 14.9	6.8 to 7.45	-81	-110	10	2 to 13	5	330	5 × 5 LFCSP	3A001.a.11.b	HMC531LP5E
HMC632	With f0/2 and divide by 4	14.25 to 15.65	7.125 to 7.825	-80	-107	9	2 to 13	5	350	5 × 5 LFCSP	3A001.a.11.b	HMC632LP5E

Higher Power and Frequency VCOs

Part Number	Description	Frequency (GHz)	Primary Divide Output (GHz)	VCO Phase Noise @ 10 kHz (dBc/Hz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	P _{OUT} (dBm)	V _{TUNE} (V)	V _{CC} (V)	I _{CC} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC734	With divide by 4	8.6 to 10.2	2.15 to 2.55	–70	–100	18	1 to 13	5	218	5 × 5 LFCSP	3A001.a.11.b	HMC734LP5E
HMC735	With divide by 4	10.5 to 12.2	2.625 to 3.05	–75	–100	17	1 to 13	5	217	5 × 5 LFCSP	3A001.a.11.b	HMC735LP5E
HMC398	With divide by 8	14 to 15	1.75 to 1.875	–75	–110	6	1 to 13	5	325	TSSOP	3A001.a.11.b	HMC398QS16GE
HMC736	With f0/2	14.5 to 15	7.25 to 7.5	–80	–105	9	1 to 13	4.2	150	4 × 4 LFCSP	EAR 99	HMC736LP4E
HMC737	With f0/2	14.9 to 15.5	7.45 to 7.75	–80	–105	9	1 to 13	4.2	150	4 × 4 LFCSP	EAR 99	HMC737LP4E
HMC738	With f0/2 and divide by 16	20.9 to 23.9	10.45 to 11.95	–65	–95	9	1 to 13	5	200	4 × 4 LFCSP	3A001.a.11.b	HMC738LP4E
HMC533	With divide by 16	23.8 to 24.8	1.4875 to 1.55	–70	–95	12	1 to 13	5	220	4 × 4 LFCSP	3A001.a.11.b	HMC533LP4E
HMC739	With f0/2 and divide by 16	23.8 to 26.8	11.9 to 13.4	–64	–93	8	1 to 13	5	200	4 × 4 LFCSP	3A001.a.11.b	HMC739LP4E

Ultrawideband VCOs

Part Number	Description	Frequency (GHz)	VCO Phase Noise @ 10 kHz (dBc/Hz)	VCO Phase Noise @ 100 kHz (dBc/Hz)	P _{OUT} (dBm)	V _{TUNE} (V)	V _{CC} (V)	I _{CC} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC586	Wideband VCO	4 to 8	–75	–100	5	0 to 18	5	55	4 × 4 LFCSP	EAR 99	HMC586LC4B
HMC587	Wideband VCO	5 to 10	–65	–95	5	0 to 18	5	55	4 × 4 LFCSP	EAR 99	HMC587LC4B
HMC732	Wideband VCO	6 to 12	–65	–95	1	0 to 23	5	57	4 × 4 LFCSP	EAR 99	HMC732LC4B
HMC588	Wideband VCO	8 to 12.5	–65	–93	5	0 to 13	5	55	4 × 4 LFCSP	EAR 99	HMC588LC4B
HMC733	Wideband VCO	10 to 20	–60	–90	2	–0.25 to +23	5	70	4 × 4 LFCSP	EAR 99	HMC733LC4B

HMC116x: Family of Ultralow Phase Noise MMIC VCOs

Key Features


- ▶ Industry's lowest phase noise
 - -89 dBc/Hz @ 10 kHz offset
 - -115 dBc/Hz @ 100 kHz offset
- ▶ ~20% lower dc power consumption than HMC5xx series VCOs
- ▶ 10 dBm RF output
- ▶ RF/2 port for PLL (~3 dBm output power)
- ▶ 2 V to 13 V V_{TUNE}
- ▶ 5 mm × 5 mm LFCSP package and pinout

Benefits

- ▶ Lower phase noise enable higher modulation and lower BER
- ▶ Lower power dissipation reduces power supply demands
- ▶ High output power reduces need for external amplification to drive a mixer
- ▶ Integrated divider eliminates need for external divider for PLL
- ▶ Low harmonics and spurs levels reduces complex filtering

Common Applications

- ▶ V_{SAT} and point-to-point backhaul radios
- ▶ Electronic test and measurement instrumentation

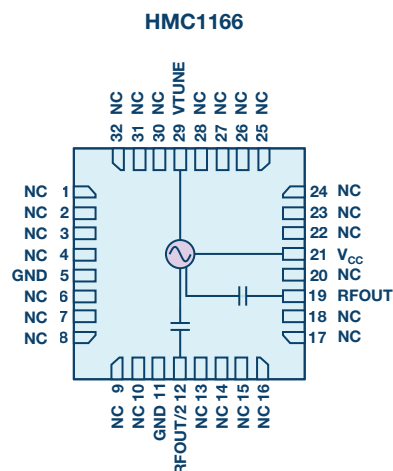

VCO Part Number	Frequency Min (GHz)	Frequency Max (GHz)	F0 Output Power (dBm) Typ	SSB Phase Noise @ 10 kHz (dBc/Hz) Typ	SSB Phase Noise @ 100 kHz Typ	Current (mA) @ 5 V Typ	Temperature Range	Package	Price @ 1k (\$U.S.)
HMC1160	8.45	9.3	12	-90	-116	260	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1161	8.71	9.55	11	-90	-115	250	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1162	9.25	10.1	11	-86	-115	230	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1163	9.65	10.41	11	-87	-114	205	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1164	10.38	11.3	8	-86	-114	200	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1165	11.07	11.62	8	-88	-113	210	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1166	11.41	12.62	11	-89	-115	220	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1167	12.17	13.33	10.5	-86	-113	200	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1168	12.47	13.72	10	-85	-113	190	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25
HMC1169	12.92	14.07	11.5	-86	-113	220	-40°C to +85°C	32-lead, 5 mm × 5 mm PQFN	17.25

Frequency Dividers, Multipliers, and Detectors

Frequency Dividers, Prescalers, and Counters

Part Number	Description	Input Frequency (GHz)	Output Frequency (GHz)	Input Power (dBm)	Output Power (dBm)	Phase Noise @ 100 kHz Offset (dBc/Hz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC705	Programmable divide by n = 1 to 17	0.1 to 6.5	Variable	-15 to +10	0	-153	5	190	4 × 4 LFCSP	EAR 99	HMC705LP4E
HMC794	Programmable divide by n = 1 to 4	0.2 to 2	Variable	-2 to +10	+10	-160	5	135	3 × 3 LFCSP	EAR 99	HMC794LP3E
HMC905	Programmable divide by n = 1 to 4	0.4 to 6	Variable	0 to +10	+3	-158	3.3	100	3 × 3 LFCSP	EAR 99	HMC905LP3E
HMC983	48-bit SD programmable	0 to 7	Variable	-15 to -30	2 V p-p into 100 Ω	-160	5, 3.3	1, 244	5 × 5 LFCSP	EAR 99	HMC983LP5E
HMC394	5-bit counter, divide by n = 2 to 32	0.1 to 2.2	Variable	-15 to +10	+4	-153	5	194	4 × 4 LFCSP	3A001.a.11.b	HMC394LP4E
HMC432	Fixed divide by 2	0 to 8	0 to 4	-12 to +12	-3	-148	3	42	SOT-26	3A001.a.11.b	HMC432E
HMC361	Fixed divide by 2	0 to 12	0 to 6	-15 to +10	+3	-148	5	83	Die	3A001.a.11.b	HMC361
HMC361	Fixed divide by 2	0 to 13	0 to 6.5	-15 to +10	+4	-148	5	83	Hermetic SMT	3A001.a.11.b	HMC361G8
HMC361	Fixed divide by 2	0 to 10	0 to 5	-15 to +10	+3	-148	5	83	SOIC	3A001.a.11.b	HMC361S8GE
HMC492	Fixed divide by 2	0 to 18	0 to 9	-20 to +10	-4	-150	5	78	3 × 3 LFCSP	3A001.a.11.b	HMC492LP3E
ADF5000	Fixed divide by 2	4 to 18	2 to 9	-10 to +10	-5	-147	3.3	30	3 × 3 LFCSP	EAR 99	ADF5000BCPZ-RL7
HMC437	Fixed divide by 3	0 to 7	0 to 2.334	-12 to +12	-1	-153	5	69	MSOP	3A001.a.11.b	HMC437MS8GE
HMC433	Fixed divide by 4	0 to 8	0 to 2	-12 to +12	-2	-150	3	53	SOT-26	3A001.a.11.b	HMC433
HMC362	Fixed divide by 4	0 to 12	0 to 3	-15 to +10	-6	-149	5	68	Die	3A001.a.11.b	HMC362
HMC362	Fixed divide by 4	0 to 12	0 to 3	-15 to +10	-6	-149	5	68	SOIC	3A001.a.11.b	HMC362S8GE
HMC365	Fixed divide by 4	0 to 13	0 to 3.25	-15 to +10	+5	-151	5	120	Die	3A001.a.11.b	HMC365
HMC365	Fixed divide by 4	0 to 13	0 to 3.25	-15 to +10	+7	-151	5	120	Hermetic SMT	3A001.b.2.d	HMC3658G
HMC365	Fixed divide by 4	0 to 13	0 to 3.25	-15 to +10	+5	-151	5	120	SOIC	3A001.b.2.d	HMC365S8GE
HMC493	Fixed divide by 4	0 to 18	0 to 4.5	-20 to +10	-4	-150	5	96	3 × 3 LFCSP	3A001.a.11.b	HMC493LP3E
ADF5001	Fixed divide by 4	4 to 18	2 to 4.5	-10 to +10	-5	-150	3.3	30	3 × 3 LFCSP	EAR 99	ADF5001BCPZ-RL7
HMC447	Fixed divide by 4	10 to 26	2.5 to 5.5	-15 to +10	-4	-150	5	96	3 × 3 LFCSP	3A001.a.11.b	HMC447LC3
HMC438	Fixed divide by 5	0 to 7	0 to 1.4	-15 to +10	-1	-153	5	80	MSOP	3A001.a.11.b	HMC438MS8GE
HMC434	Fixed divide by 8	0 to 8	0 to 1	-10 to +12	-2	-150	3	62	SOT-26	3A001.a.11.b	HMC434E
HMC363	Fixed divide by 8	0 to 12	0 to 1.5	-15 to +10	-6	-153	5	90	Die	3A001.a.11.b	HMC363
HMC363	Fixed divide by 8	0 to 12	0 to 1.5	-15 to +10	+4	-153	5	90	Hermetic SMT	3A001.a.11.b	HMC3638G
HMC363	Fixed divide by 8	0 to 12	0 to 1.5	-15 to +10	-6	-153	5	90	SOIC	3A001.a.11.b	HMC363S8GE
HMC494	Fixed divide by 8	0 to 18	0 to 2.25	-20 to +10	-4	-150	5	103	3 × 3 LFCSP	3A001.a.11.b	HMC494LP3E
ADF5002	Fixed divide by 8	4 to 18	0.5 to 2.25	-10 to +10	-5	-153	3.3	30	3 × 3 LFCSP	EAR 99	ADF5002BCPZ-RL7

Frequency Multipliers—Active

Part Number	Description	Input Frequency (GHz)	Output Frequency (GHz)	Input Power (dBm)	Output Power (dBm)	100 kHz Phase Noise (dBc/Hz)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC575	×2 active	3 to 4.5	6 to 9	+3	17	-140	5	90	4 × 4 LFCSP	EAR 99	HMC575LP4E
HMC561	×2 active	4 to 10.5	8 to 21	+5	17	-139	5	98	Die	EAR 99	HMC561
HMC561	×2 active	4 to 10.5	8 to 21	+5	17	-139	5	98	3 × 3 LFCSP	EAR 99	HMC561LP3E
HMC573	×2 active	4 to 11	8 to 22	+5	12	-134	5	92	3 × 3 LFCSP	EAR 99	HMC573LC3B
HMC368	×2 active	45 to 8	9 to 16	+2	13	-140	5	75	4 × 4 LFCSP	EAR 99	HMC368LP4E
HMC369	×2 active	4.95 to 6.35	9.9 to 12.7	0	4	-142	5	46	3 × 3 LFCSP	EAR 99	HMC369LP3E
HMC814	×2 active	6.5 to 12.3	13 to 24.6	+4	17	-136	5	88	Die	EAR 99	HMC814
HMC814	×2 active	6.5 to 12.3	13 to 24.6	+4	17	-136	5	88	3 × 3 LFCSP	EAR 99	HMC814LC3B
HMC576	×2 active	9 to 14.5	18 to 29	+3	17	-132	5	82	Die	EAR 99	HMC576
HMC576	×2 active	9 to 14.5	18 to 29	+3	17	-132	5	82	3 × 3 LFCSP	EAR 99	HMC576LC3B
HMC448	×2 active	9.5 to 12.5	19 to 25	0	11	-135	5	48	Die	EAR 99	HMC448
HMC598	×2 active	11 to 23	22 to 46	+5	15	—	5	175	Die	EAR 99	HMC598
HMC578	×2 active	12 to 16.5	24 to 33	+3	17	-132	5	81	Die	EAR 99	HMC578
HMC578	×2 active	12 to 16.5	24 to 33	+3	17	-132	5	81	3 × 3 LFCSP	EAR 99	HMC578LC3B
HMC942	×2 active	12 to 15.5	25 to 31	+4	17	—	4.5	214	4 × 4 LFCSP	EAR 99	HMC942LP4E
HMC577	×2 active	13.5 to 15.5	27 to 31	+5	20	-128	5	213	4 × 4 LFCSP	EAR 99	HMC577LC4B
HMC579	×2 active	16 to 23	32 to 46	+3	9	-127	5	70	Die	EAR 99	HMC579
HMC1096	×2 active	1.9 to 2.8	3.7 to 5.6	0	12	-142	5	100	3 × 3 LFCSP	EAR 99	HMC1096LP3E
HMC443	×4 active	2.45 to 2.8	9 to 11.2	-15	4	-142	5	52	4 × 4 LFCSP	EAR 99	HMC443LP4E
HMC695	×4 active	2.85 to 3.3	11.4 to 13.2	-15	7	-140	5	60	4 × 4 LFCSP	EAR 99	HMC695LP4E
HMC370	×4 active	3.6 to 4.1	14.4 to 16.4	-15	0	-140	5	55	4 × 4 LFCSP	EAR 99	HMC370LP4E
HMC1110	×6 active	11.83 to 14.33	71 to 86	+3	13	—	4	255	Die	EAR 99	HMC1110
HMC444	×8 active	1.2375 to 1.4	9.9 to 11.2	-15	6	-136	5	68	4 × 4 LFCSP	EAR 99	HMC444LP4E
HMC445	×16 active	0.61875 to 0.6875	9.9 to 11	-15	7	-130	5	78	4 × 4 LFCSP	EAR 99	HMC445LP4E

Frequency Multipliers—Passive

Part Number	Description	Input Frequency (GHz)	Output Frequency (GHz)	Input Drive (dBm)	Conversion Loss (dB)	1 F0 Isolation (dB)	4 F0 Isolation (dB)	Package (mm)	ECCN Code	Ordering Part Number
HMC-XDB112	×2 passive	10 to 15	20 to 30	10 to 15	13	30	—	Die	5A991.h	HMC-XDB112
HMC1105	×2 passive	20 to 40	40 to 80	11 to 15	11	41	46	Die	EAR 99	HMC1105
HMC-XTB110	×3 passive	24 to 30	72 to 90	10 to 15	19	—	—	Die	5A991.h	HMC-XTB110

Phase Frequency Detectors

Part Number	Description	Input Frequency (GHz)	Output Frequency (GHz)	10 kHz Phase Noise (dBc/Hz)	Output Level (mV)	V _{CC} (V)	I _{CC} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC984	Frequency detector and charge pump	0 to 0.35	+3 to +12	—	0.02 to 2.5	5, 3	97, 27	4 × 4 LFCSP	EAR 99	HMC984LP4E
HMC439	High frequency phase frequency detector	0.01 to 1.3	−10 to +10	−153	2 V p-p	5	96	QSOP	3A001.a.11.b	HMC439QS16GE
HMC3716 New	High frequency phase frequency detector	0.01 to 1.3	−10 to +5	−153	2 V p-p	5	115	4 × 4 LFCSP	3A001.a.11.b	HMC3716LP4E

Tunable Harmonic Low-Pass Filters

Part Number	Description	Frequency (GHz)	Control	Cutoff Freq Range (MHz)	Stop Band Frequency (Rej > 20 dB)	Tuning Response (ns)	Return Loss (dB)	Package (mm)	ECCN Code	Ordering Part Number
HMC1044	Programmable, harmonic low-pass filter	0 to 3.025	Digital 3 bits	1000 to 3000	—	10	10	3 × 3 LFCSP	EAR 99	HMC1044LP3E

High Speed Logic

1:2 and 1:4 Fanout Buffers

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V_{PEO})	DC Power Consumption (mW)	DC Power Supply (V_{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC720	1:2 fanout buffer	13/13	19/18	2	0.6 to 1.1	300	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC720LP3E
HMC724	1:2 fanout buffer	13/13	19/18	2	1.1	300	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC724LC3
HMC744	1:2 fanout buffer	13/13	22/20	2	0.6 to 1.2	290	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC744LC3
HMC850	1:2 fanout buffer	28/20	16/15	2	0.6 to 1.1	315	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC850LC3
HMC842	1:2 fanout buffer with adjustable V_{OUT}	45/28	11/11	3	0.4 to 1.2	465	-3.3	4 × 4 LFCSP	EAR99	HMC842LC4B
HMC940	1:4 fanout buffer	13/13	26/25	4	0.6 to 1.4	440	-3.3 or +3.3	4 × 4 LFCSP	EAR99	HMC940LC4B

2:1 Selectors

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V_{PEO})	DC Power Consumption (mW)	DC Power Supply (V_{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC858	2:1 differential selector	14/14	19/20	2	0.5 to 1.3	221	-3.3 or +3.3	4 × 4 LFCSP	EAR99	HMC858LC4B
HMC678	2:1 differential selector	13/13	17/15	—	0.6 to 1.2	250	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC678LC3C
HMC728	2:1 differential selector	13/13	17/15	—	1.1	250	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC728LC3C
HMC748	2:1 selector	13/13	22/22	2	0.6 to 1.2	250	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC748LC3C
HMC958	4:1 selector	14/14	17/17	2	0.5 to 1.3	294	-3.3 or +3.3	5 × 5 LFCSP	EAR99	HMC958LC5

AND/NAND/OR/NOR

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V_{PEO})	DC Power Consumption (mW)	DC Power Supply (V_{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC722	AND/NAND/OR/NOR with adjustable V_{OUT}	13/13	19/18	2	0.6 to 1.1	230	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC722LC3C
HMC722	AND/NAND/OR/NOR	13/13	19/18	2	0.6 to 1.1	230	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC722LP3E
HMC726	AND/NAND/OR/NOR	13/13	19/18	2	1.1	230	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC726LC3C
HMC746	AND/NAND/OR/NOR	13/13	22/21	2	0.6 to 1.2	230	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC746LC3C
HMC852	AND/NAND/OR/NOR	28/28	15/14	2	0.6 to 1.5	241	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC852LC3C
HMC843	AND/NAND/OR/NOR	45/45	10/10	2	0.2 to 0.9	520	-3.3	4 × 4 LFCSP	EAR99	HMC843LC4B

Clock Dividers

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V_{PEO})	DC Power Consumption (mW)	DC Power Supply (V_{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC959	Clock divide by 4	—/26	19/19	2	0.8 to 1.8	281	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC959LC3
HMC859	Clock divide by 8	—/26	19/17	2	0.8 to 1.8	520	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC859LC3

D-Type Flip Flops

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V_{PEO})	DC Power Consumption (mW)	DC Power Supply (V_{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC953	Dual D-type flip flop with common	14/14	22/20	2	0.6 to 1.3	442	-3.3 or +3.3	4 × 4 LFCSP	EAR99	HMC953LC4B
HMC723	D-type flip flop with adjustable V_{OUT}	13/13	19/17	2	0.7 to 1.3	264	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC723LC3C
HMC723	D-type flip flop	13/13	19/17	2	0.7 to 1.3	260	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC723LP3E
HMC727	D-type flip flop	13/13	19/17	2	1.1	260	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC727LC3C
HMC747	D-type flip flop	13/13	22/20	2	0.7 to 1.2	264	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC747LC3C
HMC853	D-type flip flop	28/28	15/14	2	0.7 to 1.3	260	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC853LC3
HMC841	D-type flip flop	43/43	12/12	2	0.2 to 0.85	630	-3.3	4 × 4 LFCSP	EAR99	HMC841LC4B

T-Flip Flops

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V_{PEO})	DC Power Consumption (mW)	DC Power Supply (V_{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC679	T-flip flop with reset	26/26	18/17	2	0.4 to 1.1	270	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC679LC3C
HMC729	T-flip flop with reset	26/26	18/17	2	1.1	270	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC729LC3C
HMC749	T-flip flop with reset	26/26	18/17	2	0.6 to 1.2	270	-3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC749LC3C

XOR/XNORs

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V _{PPD})	DC Power Consumption (mW)	DC Power Supply (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC721	XOR/XNOR with adjustable V _{OUT}	13/13	19/18	2	0.6 to 1.2	230	–3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC721LC3C
HMC721	XOR/XNOR	13/13	19/18	2	0.6 to 1.2	230	–3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC721LP3E
HMC725	XOR/XNOR	13/13	19/18	2	1.1	230	–3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC725LC3C
HMC745	XOR/XNOR	13/13	21/19	2	0.6 to 1.2	240	–3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC745LC3
HMC851	XOR/XNOR	28/28	15/14	2	0.6 to 1.4	241	–3.3 or +3.3	3 × 3 LFCSP	EAR99	HMC851LC3C
HMC844	XOR/XNOR	45/28	11/10	2	0.2 to 0.85	512	–3.3	4 × 4 LFCSP	EAR99	HMC844LC4B

Muxes and Demuxes

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V _{PPD})	DC Power Consumption (mW)	DC Power Supply (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC954	2:1 mux	23/16	15/15	—	0.8 to 1.5	480	–3.3 or +3.3	4 × 4 LFCSP	EAR99	HMC954LC4B
HMC854	4:1 mux	28/14	16/16	4	0.7 to 1.25	510	–3.3 or +3.3	5 × 5 LFCSP	EAR99	HMC854LC5
HMC847	4:1 mux	45/22.5	11/12	3	0.25 to 0.9	1782	+3.3	5 × 5 LFCSP	EAR99	HMC847LC5
HMC955	1:2 mux with high speed invert	32/16	19/18	<3	0.5 to 1.2	644	–3.3 or +3.3	4 × 4 LFCSP	EAR99	HMC955LC4B
HMC855	1:4 demux	28/14	22/22	—	0.45 to 1.14	644	–3.3 or +3.3	5 × 5 LFCSP	EAR99	HMC855LC5
HMC848	1:4 demux	45/22.5	25/21	4	0.3 to 1.0	1782	+3.3	5 × 5 LFCSP	EAR99	HMC848LC5

Data Path Signal Conditioners

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V _{PPD})	DC Power Consumption (mW)	DC Power Supply (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC7545	Signal conditioner	14.2	25/25	Feed forward equalizer	0.4 to 0.9	340	3.3	7 × 4 LFCSP	EAR99	HMC7545ABLP47E
HMC6545	Linear equalizer	32	16/16	Continuous time linear equalizer	0.4 to 0.96	430	+2.5 or +3.3	5 × 5 LFCSP	EAR99	HMC6545LP5E

Track-and-Hold Data

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V _{PPD})	DC Power Consumption (mW)	DC Power Supply (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC1061	Track-and-hold	4	DC to 18	Dual	<70	2340	–4.75 and +2	5 × 5 LFCSP	EAR99	HMC1061LC5
HMC760	Track-and-hold	4	DC to 5	Single	<70	1420	–4.75 and +2	4 × 4 LFCSP	EAR99	HMC760LC4B
HMC661	Track-and-hold	4	DC to 18	Single	<70	1590	–4.75 and +2	4 × 4 LFCSP	EAR99	HMC661LC4B

Digital Crosspoint Switches

Part Number	Description	Data/Clock Rate (Gbps/GHz)	Rise/Fall Time (ps)	Deterministic Jitter (ps)	Differential Output Swing (V _{PPD})	DC Power Consumption (mW)	DC Power Supply (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC1027	13 × 13 crosspoint switch	14.2	22/23	0.05 to 2	0.4 to 0.8	1200	2.5 and 3.3	14 × 14 BGA	EAR99	HMC1027BG

RF Power Detectors

TruPwr™ rms Responding Detectors

Part Number	Description	Input Frequency (GHz)	Input Range (dB)	Temperature Drift (dB)	V _s (V)	I _{sv} (mA)	Package (mm)	ECCN Code	Ordering Part Number
AD8361	Linear in V/V rms	LF to 2.5	30	±0.25	3 to 5	1.1	SOT-23	5A991.b	AD8361ARTZ-RL7
AD8361	Linear in V/V rms	LF to 2.5	30	±0.25	3 to 5	1.1	SOIC	5A991.b	AD8361ARMZ-REEL7
AD8364	Dual linear-in-dB	LF to 2.7	60	±0.5	5	70	5 × 5 LFCSP	5A991.b	AD8364ACPZ-WP
AD8362	Linear-in-dB	LF to 3.8	65	±1.0	5	20	TSSOP	5A991.b	AD8362ARUZ-REEL7
HMC1010	Linear-in-dB	0 to 3.9	60	±0.5	5	48	4 × 4 LFCSP	EAR 99	HMC1010LP4E
HMC1020	Linear-in-dB	0 to 3.9	72	±0.75	5	55	4 × 4 LFCSP	EAR 99	HMC1020LP4E
HMC1021	Linear-in-dB with envelope detector	0 to 3.9	70	±0.5	5	75	4 × 4 LFCSP	EAR 99	HMC1021LP4E
HMC1030	Dual linear-in-dB with envelope detector	0 to 3.9	70	±0.5	5	143	5 × 5 LFCSP	EAR 99	HMC1030LP5E
HMC1120	Linear-in-dB with envelope detector	0 to 3.9	72	±0.5	3	70	4 × 4 LFCSP	EAR 99	HMC1120LP4E
HMC909	Linear-in-dB	0 to 5.8	40	±0.5	5	42	4 × 4 LFCSP	EAR 99	HMC909LP4E
ADL5511	Linear in V/V rms with envelope detector	0 to 6	47	±0.1	5	21.5	4 × 4 LFCSP	EAR 99	ADL5511ACPZ-R7
AD8363	Linear-in-dB	~0 to 6	60	±0.5	5	60	4 × 4 LFCSP	5A991.b	AD8363ACPZ-WP
LT5581	Linear-in-dB	0.01 to 6	40	±1	2.7 to 5	1.4	3 × 2 DFN	EAR 99	LT5581IDB#TRPBF
LTC5587	Linear-in-dB, integrated 12-bit ADC	0.01 to 6	40	±1	3.3	3	3 × 3 DFN	EAR 99	LTC5587IDD#TRPBF
LTC5583	Dual-ch, linear-in-dB, VSWR, peak detect	0.04 to 6	60	±0.5	3.3	80.5	4 × 4 QFN	EAR 99	LTC5583IUF#TRPBF
ADL5501	Linear in V/V rms	0.05 to 6	30	±0.1	3 to 5	1.1	2 × 2 SC70	5A991.b	ADL5501AKSZ-R2
ADL5500	Linear in V/V rms	0.1 to 6	30	±0.25	3 to 5	1	1 × 1 WLCSP	5A991.b	ADL5500ACBZ-P7
ADL5903	Linear-in-dB	0.2 to 6	35	±0.2	3 to 5	2.5	2 × 2 LFCSP	5A991.b	ADL5903ACPZ-R7
ADL5502	Linear in V/V rms with peak/envelope detector	0.45 to 6	35	±0.1	3	3	3 × 3 WLCSP	5A991.b	ADL5502ACBZ-P7
ADL5504	Linear in V/V rms excellent rms accuracy	0.45 to 6	30	±0.1	3	1.8	1.2 × 0.8 WLCSP	5A991.b	ADL5504ACBZ-P7
ADL5505	Linear in V/V rms	0.45 to 6	30	±0.1	3	1.8	0.8 × 0.8 WLCSP	5A991.b	ADL5505ACBZ-P7
ADL5902	Linear-in-dB	0.05 to 9	65	±0.5	5	73	4 × 4 LFCSP	5A991.b	ADL5902ACPZ-WP
ADL5904	Linear-in-dB rms with threshold detector	0 to 6	45	±0.5	3.3	3	3 × 3 LFCSP	EAR 99	ADL5904ACPZ-R7
Upcoming									
ADL5906	Linear-in-dB	0.01 to 10	60	±1	5	70	4 × 4 LFCSP	5A991.b	ADL5906ACPZ-R2
LTC5582	Linear-in-dB	0.04 to 10	57	±0.5	3.3	41.6	3 × 3 DFN	EAR 99	LTC5582IDD#TRPBF
LTC5596	Linear-in-dB	0.1 to 40	35	±1.5	3.3	30	2 × 2 DFN	EAR 99	LTC5596IDC#TRPBF

Non-rms Responding RF Detectors

Part Number	Description	Input Frequency (GHz)	Input Range (dB)	Temperature Drift (dB)	V _s (V)	I _{sv} (mA)	Package (mm)	ECCN Code	Ordering Part Number
AD8307	Log amp	0 to 0.5	92	±1	3 to 5	8	SOIC	EAR 99	AD8307ARZ-RL7
AD8307	Log amp	0 to 0.5	92	±1	3 to 5	8	PDIP	EAR 99	AD8307ANZ
AD8310	Log amp	0 to 0.44	95	±1	3 to 5	8	Die	EAR 99	AD8310ACHIPS
AD8310	Log amp	0 to 0.44	95	±1	3 to 5	8	MSOP	EAR 99	AD8310ARMZ-REEL7
AD8302	Gain and phase	0 to 2.7	60	±1	3 to 5	19	TSSOP	EAR 99	AD8302ARUZ-RL7
HMC612	Log detector/controller	0 to 3	74	±0.75	3 to 5	29	4 × 4 LFCSP	EAR 99	HMC612LP4E
ADL5513	Log detector/controller	0.001 to 4	80	±0.5	3 to 5	31	3 × 3 WLCSP	EAR 99	ADL5513ACPZ-WP
AD8318	Log detector/controller	0.001 to 8	70	±0.5	5	68	4 × 4 LFCSP	EAR 99	AD8318ACPZ-WP
HMC602	Log detector/controller	0.001 to 8	72	±1	5	113	4 × 4 LFCSP	EAR 99	HMC602LP4E
AD8319	Log detector/controller	0.001 to 10	45	±0.5	3.3 to 5	22	2 × 3 LFCSP	EAR 99	AD8319ACPZ-WP
AD8317	Log detector/controller	0.001 to 10	55	±0.5	3.3 to 5	22	2 × 2 LFCSP	EAR 99	AD8317ACPZ-WP
AD8317	Log detector/controller	0.001 to 10	55	±0.5	3.3 to 5	22	Die	EAR 99	AD8317ACHIPS
HMC611	Log detector/controller	0.001 to 10	69	±1	5	106	Die	EAR 99	HMC611
HMC611	Log detector/controller	0.001 to 10	69	±1	5	106	4 × 4 LFCSP	EAR 99	HMC611LP4E
ADL5519	Dual log amp	0.001 to 10	62	±0.5	3.3 to 5	60	5 × 5 LFCSP	EAR 99	ADL5519ACPZ-WP
AD8306	Log/limiting amp	0.005 to 0.4	100	±1	3 to 5	16	Die	EAR 99	AD8306ACHIPS
AD8306	Log/limiting amp	0.005 to 0.4	100	±1	3 to 5	16	SOP	EAR 99	AD8306ARZ-RL7
AD8309	Log/limiter amp	0.005 to 0.5	100	±1	3 to 5	16	TSSOP	EAR 99	AD8309ARUZ-REEL7
HMC713	Log detector/controller	0.045 to 2.7	54	±1	3 to 5	17	MSOP	EAR 99	HMC713MS8E
LT5537	Log detector	<0.01 to 1	83	±1	2.7 to 5	13.5	3 × 2 DFN	EAR 99	LT5537EDDB#TRPBF
HMC601	Log detector/controller	0.01 to 4	75	±0.5	3 to 5	30	4 × 4 LFCSP	EAR 99	HMC601LP4E
ADL5506	Log amp	0.03 to 4.5	45	±1	3 to 5	3.75	0.8 × 1.2 WLCSP	5A991.b	ADL5506ACBZ-R7
LT5538	Log detector	0.04 to 3.8	75	±1	3 to 5	29	3 × 3 DFN	EAR 99	LT5538IDD#TRPBF
LT5534	Log detector	0.05 to 3	60	±0.5	2.7 to 5	7	2 × 2 SC70	EAR 99	LT5534ESC#TRPBF
AD8312	Log amp	0.05 to 3.5	45	±0.5	3 to 5	4.2	1 × 1.5 WLCSP	5A991.g	AD8312ACBZ-P2
HMC600	Log detector/controller	0.05 to 4	70	±0.5	3 to 5	29	4 × 4 LFCSP	EAR 99	HMC600LP4E
HMC713	Log detector/controller	0.05 to 8	54	±0.5	3.3 to 5	17	3 × 3 LFCSP	EAR 99	HMC713LP3E
AD8313	Log amp	0.1 to 2.5	70	±1.25	3 to 5	13.7	MSOP	EAR 99	AD8313ARMZ-REEL7
AD8314	Log amp	0.1 to 2.7	45	±1	3 to 5	4, 5	MSOP	EAR 99	AD8314ARMZ-REEL7
AD8314	Log amp	0.1 to 2.7	45	±1	3 to 5	4, 5	2 × 3 LFCSP	EAR 99	AD8314ACPZ-RL7
ADL6010	Linear-in-V/V	0.5 to 43.5	40	±0.3	5	3	2 × 2 LFCSP	5A991.b	ADL6010ACPZ-R7
LT5504	Log detector	0.8 to 2.7	75	±2	2.7 to 5	14.7	MSOP-8	EAR 99	LT5504EMS8#TRPBF
HMC1094	Millimeter wave log detector	1 to 23	50	±0.5	3.3	85	3 × 3 LFCSP	EAR 99	HMC1094LP3E
HMC948	Millimeter wave log detector	1 to 23	54	±0.5	3.3	91	3 × 3 LFCSP	EAR 99	HMC948LP3E
HMC662	Millimeter wave log detector	8 to 30	54	±0.5	3.3	88	3 × 3 LFCSP	EAR 99	HMC662LP3E
HMC7447	E-band detector	71 to 86	24	±0.5	—	—	Die	EAR 99	HMC7447

Envelope and Peak Detectors

Part Number	Description	Frequency (GHz)	Envelope Bandwidth (MHz)	Input Range (dB)	Temperature Drift (dB)	V _s (V)	I _{sy} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC1030	Dual rms linear-in-dB with envelope detector	0 to 3.9	150	70	±0.5	5	143	5 × 5 LFCSP	EAR 99	HMC1030LP5E
HMC1021	RMS linear-in-dB with envelope detector	0 to 3.9	150	70	±0.5	5	75	4 × 4 LFCSP	EAR 99	HMC1021LP4E
ADL5511	RMS linear-in-V/V with envelope detector	0 to 6	130	47	±0.1	5	21.5	4 × 4 LFCSP	EAR 99	ADL5511ACPZ-R7
ADL5910 <i>New</i>	Threshold detector	0.45 to 6	—	45	±0.5	3.3	3	3 × 3 LFCSP	EAR 99	ADL5910ACPZN-R7
LTC5507	Schottky peak detector with gain compression	0.0001 to 1	1	40	±1	2.7 to 6	0.55	TSOT-23	EAR 99	LTC5507ES6#TRPBF
HMC1120	Linear-in-dB with envelope detector	0 to 6	150	72	±0.5	3	70	4 × 4 LFCSP	EAR 99	HMC1120LP4E
LTC5509	Schottky peak detector with no gain compression	0.3 to 3	1.5	30	±1	2.7 to 6	0.58	SC70	EAR 99	LTC5509ESC6#TRPBF
LTC5505-1	Schottky peak detector with gain compression	0.3 to 3	4	46	±2	2.7 to 6	0.5	SOT-23	EAR 99	LTC5505-1ES5#TRPBF
LTC5505-2	Schottky peak detector with gain compression	0.3 to 3.5	4	44	±2	2.7 to 6	0.5	SOT-23	EAR 99	LTC5505-2ES5#TRPBF
LTC5530	Schottky peak detector with gain adjust	0.3 to 7	2	30	±1	2.7 to 5.5	0.5	TSOT-23	EAR 99	LTC5530ES6#TRPBF
LTC5531	Schottky peak detector with offset adjust	0.3 to 7	2	30	±1	2.7 to 5.5	0.5	TSOT-23	EAR 99	LTC5531ES6#TRPBF
LTC5532	Schottky peak detector with gain and offset adjust	0.3 to 7	2	30	±1	2.7 to 5.5	0.5	TSOT-23	EAR 99	LTC5532ES6#TRPBF
LTC5508	Schottky peak detector with gain compression	0.3 to 7	2	36	±2	2.7 to 6	0.55	SC70	EAR 99	LTC5508ESC6#TRPBF
LTC5533	Dual Schottky peak detector	0.3 to 11	2	30	±1	2.7 to 6	0.9	4 × 3 DFN	EAR 99	LTC5533EDE#TRPBF
ADL5502	RMS linear-in-V/V with peak/envelope detector	0.1 to 3.9	10	35	±0.1	3	3	3 × 3 WLCSP	5A991.b	ADL5502ACBZ-P7
ADL6010	Linear-in-V/V	0.5 to 43.5	45	45	±0.3	5	3	2 × 2 LFCSP	5A991.b	ADL6010ACPZN-R7
ADL6012 <i>Upcoming</i>	Linear-in-V/V	0.5 to 43.5	500	45	±0.3	5	26	3 × 2 LFCSP	—	ADL6012ACPZN-R7
LTC5536	Schottky peak detector and 20 ns comparator	0.6 to 7	—	38	±1	2.7 to 5.5	2.1	TSOT-23	EAR 99	LTC5536ES6#TRPBF
LTC5535	Schottky peak detector	0.6 to 7	12	30	±1	2.7 to 5.5	2	TSOT-23	EAR 99	LTC5535ES6#TRPBF
LTC5564	Ultrafast Schottky peak detector with 9 ns comparator	0.6 to 15	75	36	±2	3 to 5.5	44	3 × 3 QFN	EAR 99	LTC5564IUD#TRPBF

SDLVAs

Part Number	Description	Frequency (GHz)	Rise/Fall Time (ns)	Input Range (dB)	Output Frequency Flatness (dB)	Threshold (dBm)	V _s (V)	I _{sy} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC613	SDLVA	0.5 to 18.5	4/18	59	±1.5	−54	3.3	83	4 × 4 LFCSP	EAR 99	HMC613LC4B
HMC913	SDLVA	0.6 to 20	5/10	59	±1.5	−54	3.3	80	Die	EAR 99	HMC913
HMC913	SDLVA	0.6 to 20	5/10	59	±2.0	−54	3.3	80	4 × 4 LFCSP	EAR 99	HMC913LC4B
HMC1013	High range SDLVA	1 to 26	5/15	67	±2.0	−62	3.3	183	4 × 4 LFCSP	EAR 99	HMC1013LP4E
HMC813	SDLVA with limited output	1 to 26	5/10	55	±1.5	−53	3.3	150	Die	EAR 99	HMC813
HMC813	SDLVA with limited output	0.1 to 20	5/10	55	±1.5	−53	3.3	150	4 × 4 LFCSP	EAR 99	HMC813LC4B

RF Switches

SPST

Part Number	Description	RF Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dB)	Input P0.1 dB (dB)	Input IP3 (dBm)	Control Input (V _{cc})	Package (mm)	ECCN Code	Ordering Part Number
ADG901	Absorptive	0 to 2.5	0.8	40	17	—	36	CMOS/LVTTL	MSOP	EAR 99	ADG901BRMZ
ADG902	Reflective	0 to 2.5	0.8	40	17	—	36	CMOS/LVTTL	MSOP	EAR 99	ADG902BRMZ
HMC1055	Nonreflective	0 to 3.5	0.6	36	32	28	63	0/3	SOT-26	EAR 99	HMC1055LP2CE
HMC550A	Fail-safe	0 to 6	0.7	25	—	32	52	0/2.2 to 5	SOT-26	EAR 99	HMC550AE

SPDT

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dBm)	Input P0.1 dB (dBm)	Input IP3 (dBm)	Control Input (V _{cc})	Package (mm)	ECCN Code	Ordering Part Number
ADG918	Absorptive	0 to 2	0.8	43	17	—	36	CMOS/LVTTL	MSOP	EAR 99	ADG918BRMZ
ADG919	Reflective	0 to 2	0.8	43	17	—	36	CMOS/LVTTL	MSOP	EAR 99	ADG919BRMZ
ADG936	Dual absorptive	0 to 2	0.9	36	16	—	32	CMOS/LVTTL	TSSOP	EAR 99	ADG936BRUZ
ADG936-R	Dual reflective	0 to 2	0.9	36	16	—	32	CMOS/LVTTL	TSSOP	EAR 99	ADG936BRUZ-R
HMC199A	Dual switch	0 to 2.5	0.4	25	28	27	55	0/+5	MSOP	EAR 99	HMC199AMS8E
HMC546	10 W, fail-safe	0.2 to 2.7	0.4	22	—	41	64	0/+3 to +8	MSOP	EAR 99	HMC546MS8GE
HMC546	10 W, fail-safe	0.2 to 2.7	0.3	27	—	21	45	0/+3 to +8	2 × 2 DFN	EAR 99	HMC546LP2E
HMC197B	Reflective	0 to 3	0.4	28	30	28	45	0/+3	SOT-26	EAR 99	HMC197BE
HMC194A	High isolation	0 to 3	0.5	55	30	28	53	0/+5	8-lead MSOP	EAR 99	HMC194AMS8E
HMC221B	Reflective	0 to 3	0.4	29	30	27	55	0/+3	SOT-26	EAR 99	HMC221BE
HMC190B	Reflective	0 to 3	0.4	30	30	27	55	0/+3	8-lead MSOP	EAR 99	HMC190BMS8E
HMC545A	Reflective	0 to 3	0.27	31	30	27	46	0/+3.3 to +5	QSOP	EAR 99	HMC545AE
HMC284A	Nonreflective	0 to 3.5	0.5	45	29	27	50	0/+5	8-lead MSOP	EAR 99	HMC284AMS8GE
HMC349A	High isolation	0 to 4	0.9	67	34	30	53	0/+5	4 × 4 LFCSP	EAR 99	HMC349ALP4CE
HMC349A	High isolation	0 to 4	0.9	70	34	32	53	0/+5	MSOP	EAR 99	HMC349AMS8GE
HMC435A	Nonreflective	0 to 4	0.8	62	30	27	54	0/+5	MSOP	EAR 99	HMC435AMS8GE
HMC849A	Nonreflective	0 to 6	0.9	60	34	32	52	0/+3 to +5	4 × 4 LFCSP	EAR 99	HMC849ALP4CE
HMC270A <i>New</i>	Nonreflective	0 to 8	1	45	28	—	42	0/–5	MSOP	EAR 99	HMC270AMS8GE
HMC232A	High isolation	0 to 12	1.5	57	30	27	47	0/–5	4 × 4 LFCSP	EAR 99	HMC232ALP4E
HMC1118	Nonreflective	0 to 13	0.6	56	37	—	62	0/+3.3	3 × 3 LFCSP	EAR 99	HMC1118LP3DE
HMC8038	Nonreflective	0.1 to 6	0.8	60	36	35	60	0/+3.3 to +5	4 × 4 LFCSP	EAR 99	HMC8038LP4CE
HMC347A <i>New</i>	Nonreflective	0.1 to 20	1.7	45	29	—	45	0/–5	Die	EAR 99	HMC347A
HMC347A <i>New</i>	Nonreflective	0.1 to 14	2.1	46	29	—	47	0/–5	3 × 3 LFCSP	EAR 99	HMC347ALP3E
HMC547A <i>New</i>	Nonreflective	0 to 20	2	45	23	—	47	0/–5	3 × 3 LFCSP	EAR 99	HMC547ALP3E
ADRF5020 <i>New</i>	Nonreflective	0.1 to 30	1.4	56	27	—	50	0/+3.3	3 × 3 LGA	EAR 99	ADRF5020BCCZN
ADRF5021 <i>New</i>	Nonreflective	~0 to 30	2	60	—	27	52	CMOS/LVTTL	3 × 3 LGA	EAR 99	ADRF5021BCCZN
HMC986A <i>New</i>	Reflective	0.1 to 50	1.7	36	25	21	40	0/–3	Die	EAR 99	HMC986A
ADRF5130 <i>New</i>	44 W, reflective	0.7 to 3.5	0.6	50	—	46	68	0/+3.3 to +5	3 × 3 LFCSP	EAR 99	ADRF5130BCPZ
HMC-SDD112	Pin MMIC	55 to 86	2	30	—	—	—	–1	Die	5A991.h	HMC-SDD112
HMC646	40 W T/R	0.1 to 2.1	0.7	32	—	46	74	0/+3 to +8	2 × 2 LFCSP	EAR 99	HMC646LP2E
HMC574A <i>New</i>	5 W, T/R	0 to 3	0.25	30	38	36	63	0/+3 to +8	8-lead MSOP	EAR 99	HMC574AMS8E
HMC595A	3 W, T/R	0 to 3	0.25	30	38	36	64	0/+3 to +10	SOT-26	EAR 99	HMC595AE
HMC544A	T/R	0 to 4	0.25	23	39	37	55	0/+3 to +5	SOT-26	EAR 99	HMC544AE
HMC536	T/R	0 to 6	0.5	27	—	33	52	0/+3 to +5	8-lead MSOP	EAR 99	HMC536MS8GE
HMC536	T/R	0 to 6	0.7	30	—	34	52	0/+3 to +5	2 × 2 DFN	EAR 99	HMC536LP2E
HMC784A <i>New</i>	10W, T/R	0.1 to 4	0.4	28	38	36	62	0/+3 to +8	MSOP	EAR 99	HMC784AMS8GE

SP3T, SP4T, SP6T, SP8T

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dBm)	Input P0.1dB (dBm)	Input IP3 (dBm)	Control Input (V _{cc})	Package (mm)	ECCN Code	Ordering Part Number
HMC245A	SP3T	0 to 2.5	0.5	44	26	24	48	TTL/CMOS	TSSOP	EAR 99	HMC245AQS16E
ADG904	SP4T, absorptive	0 to 2.5	0.4	37	16	—	31	CMOS/LVTTL	TSSOP LFCSP	EAR 99	ADG904BCPZ ADG904BRUZ
ADG904-R	SP4T, reflective	0 to 2.5	0.4	37	16	—	31	CMOS/LVTTL	TSSOP LFCSP	EAR 99	ADG904BCPZ-R-REEL ADG904BRUZ-R
HMC241A	SP4T	0 to 4	0.7	43	30	26	47	TTL/CMOS	3 × 3 LFCSP	EAR 99	HMC241ALP3E
HMC241A	SP4T	0 to 4	0.8	41	29	26	48	TTL/CMOS	TSSOP	EAR 99	HMC241AQS16E
HMC244A	SP4T	0 to 4	0.7	40	26	22	47	TTL/CMOS	Hermetic SMT	EAR 99	HMC244AG16
HMC344A	SP4T	0 to 8	2.1	32	28	19	44	0/–5	3 × 3 LFCSP	EAR 99	HMC344ALP3E
HMC345A	SP4T	0 to 8	2.2	32	21	19	45	0/+5	3 × 3 LFCSP	EAR 99	HMC345ALP3E
HMC641A	SP4T	0 to 20	2.3	43	22	—	38	0/–5	4 × 4 LFCSP	EAR 99	HMC641ALC4
HMC641A	SP4T	0 to 20	2.3	41	22	—	36	0/–5	4 × 4 LFCSP	EAR 99	HMC641ALP4E
HMC641A	SP4T	0 to 18	2.1	42	25	—	41	0/–5	Die	EAR 99	HMC641A

— = Simulation models available in ADI's ADIsimRF and/or ADIsimPLL simulation tools.

SP3T, SP4T, SP6T, SP8T (Continued)

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dBm)	Input P0.1dB (dBm)	Input IP3 (dBm)	Control Input (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
ADRF5040 <i>New</i>	SP4T	~0 to 12	0.8	34	—	34	58	0/+3.3	4 × 4 LFCSP	EAR 99	ADRF5040
HMC7992	SP4T	0.1 to 6	0.7	45	35	33	58	0/+3.3 to +5	3 × 3 LFCSP	EAR99	HMC7992LP3DE
HMC1084	SP4T	23 to 30	2.8	26	—	—	47	0/−3	4 × 4 LFCSP	EAR 99	HMC1084LC4
HMC252A	SP6T	0 to 3	0.8	45	24	—	47	0/+3.3 to +5	QSOP	EAR 99	HMC252AQS24E
HMC253A	SP8T	0 to 3.5	1.2	36	24	20	43	TTL/CMOS	4 × 4 LFCSP	EAR 99	HMC253ALC4
HMC253A	SP8T	0 to 3.5	1.2	36	24	20	43	TTL/CMOS	QSOP	EAR 99	HMC253AQS24E
HMC322A	SP8T	0 to 8	2.5	35	26	22	40	0/−5	4 × 4 LFCSP	EAR 99	HMC322ALP4E
HMC321A	SP8T	0.1 to 8	2.5	35	23	—	40	0/+5	4 × 4 LFCSP	EAR99	HMC321ALP4E

Bypass, Diversity, Matrix, and Transfer

Part Number	Description	Frequency (GHz)	Insertion Loss (dB)	Isolation (dB)	Input P1dB (dBm)	Input P0.1 dB (dBm)	Input IP3 (dBm)	Control Input (V _{DC})	Package (mm)	ECCN Code	Ordering Part Number
HMC596	4 × 2 matrix	0.2 to 3	6.5	43	22	—	27	0/3 to 5	4 × 4 LFCSP	EAR 99	HMC596LP4E
HMC427A	Transfer	0.1 to 12	1.6	38	30	—	47	0/5	3 × 3 LFCSP	EAR99	HMC427ALP3E

ADRF5020: Ultra Wideband Silicon SPDT Switch; 0.1 GHz to 30 GHz**ADRF5021: Ultra Wideband Silicon SPDT Switch; 9 kHz to 30 GHz**

Key Features


- ▶ Nonreflective 50 Ω design
- ▶ Low insertion loss: 2.0 dB up to 30 GHz
- ▶ High isolation: 60 dB to 30 GHz
- ▶ RF settling time (0.1 dB):
 - 10 ns (**ADRF5020**): fast settling
 - 15 μs (**ADRF5021**): low cutoff of 9 kHz
- ▶ High power handling: 24 dBm
- ▶ High input linearity:
 - 28 dBm P1dB typical
 - 52 dBm IM3 typical
- ▶ Supply voltage: −2.5 V, +3.3 V
- ▶ 1 kV ESD robustness (HBM)
- ▶ Temperature range: −40°C to +85°C
- ▶ 20-lead, 3 mm × 3 mm, compact NiAu plated RoHS SMT package

Benefits

- ▶ Wide useful bandwidth of up to 30 GHz
- ▶ Option for fast switching and settling time for fast switching applications
- ▶ High hot switching power handling capabilities
- ▶ Low insertion loss and flat characteristics
- ▶ Excellent isolation even at high frequencies

Common Applications

- ▶ RF and microwave test and measurement equipment
- ▶ Military radios, radars, and electronic counter measure systems
- ▶ Broadband telecommunication
- ▶ 5G cellular RF front ends

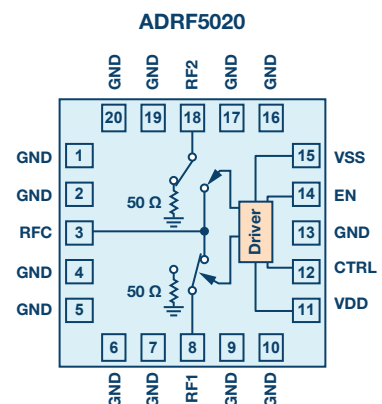

Frequency Range	Process Technology	Switch Topology	Temperature Range	Package	Price @ 1k (\$U.S.)
0.1 GHz to 30 GHz	Silicon	SPDT	−40°C to +85°C	20-lead, 3 mm × 3 mm LFCSP	50.44
9 kHz to 30 GHz	Silicon	SPDT	−40°C to +85°C	20-lead, 3 mm × 3 mm LFCSP	52.96

HMC8038: High Isolation, Silicon SPDT Nonreflective Switch; 0.1 GHz to 6.0 GHz

HMC7992: Nonreflective, Silicon SP4T Switch; 0.1 GHz to 6 GHz

Key Features

- ▶ Nonreflective, 50 Ω design
- ▶ High isolation*
 - 60 dB/45 dB @ 2 GHz
- ▶ Low insertion loss*
 - 0.8 dB/0.7 dB @ 2 GHz
- ▶ High power handling*
 - 34 dBm/33 dBm through path
 - 29 dBm/27 dBm terminated path
- ▶ High linearity
 - P0.1dB: 35 dBm/35 dBm
 - Input IP3: 60 dBm/58 dBm
- ▶ ESD ratings
 - 4 kV Class 3A/2 kV Class 2
- ▶ Single positive supply: 3.3 V to 5 V
- ▶ Standard TTL, CMOS, and 1.8 V-compatible control
- ▶ Pin-compatible with [HMC849A](#) and [HMC241A](#)

* HMC8038/HMC7992

Frequency Range	Process Technology	Switch Topology	Temperature Range	Package	Price @ 1k (U.S.)
0.1 GHz to 6 GHz	Silicon	SPDT	–40°C to +105°C	16-lead, 4 mm × 4 mm LFCSP	2.39
0.1 GHz to 6 GHz	Silicon	SP4T	–40°C to +105°C	16-lead, 3 mm × 3 mm LFCSP	3.09


Benefits

- ▶ Low insertion loss ensures signal integrity in receiver applications
- ▶ Reliable operations in through mode and hot switching due to high power handling
- ▶ Fast switching and settling time characteristics enable faster applications
- ▶ Compact package saves PCB area


Common Applications

- ▶ LNA protection for wireless infrastructure
- ▶ Predistortion feedback loops for wireless infrastructure
- ▶ RF front end for fast cellular protocol testers

HMC7992

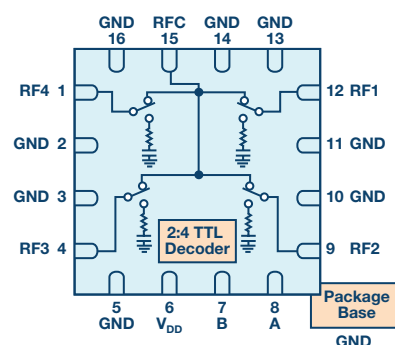

HMC8038

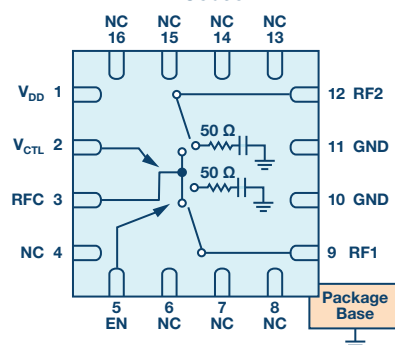

ADRF5130: High Power Silicon Switch; 0.7 GHz to 3.5 GHz

Key Features

- ▶ Reflective 50 Ω design
- ▶ Low insertion loss: 0.6 dB typical at 2 GHz
- ▶ High isolation: 50 dB to 2 GHz
- ▶ High power handling
 - 43 dBm continuous (44 W)
 - 46.5 dBm peak
- ▶ High input linearity:
 - Better than 46 dBm P0.1dB
 - 68 dBm typical at 2 GHz
- ▶ Single positive supply: 5 V/1 mA
- ▶ 2 kV ESD robustness (HBM)
- ▶ Temperature range: –40°C to +85°C
- ▶ 24-lead, 4 mm × 4 mm RoHS SMT package


Benefits

- ▶ Fast switching characteristics using advanced silicon process
- ▶ High power handling of up to 44 W
- ▶ Increased control and flexibility with CMOS control
- ▶ Simpler designs with no need for external components
- ▶ Increased reliability with fault-case (open termination) protection

Common Applications

- ▶ Cellular infrastructure, MIMO system LNA protection
 - RF and microwave test and measurement equipment
 - Military and high reliability applications
 - High power RF application
- ▶ Alternative for PIN diode-based switches

ADRF5130

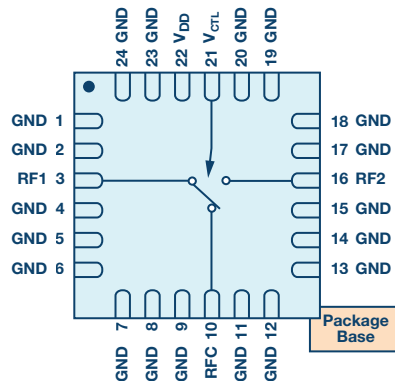

Exposed pad. Exposed pad must be connected to RF/DC ground.

Frequency Range	Process Technology	Switch Topology	Temperature Range	Package	Price @ 1k (U.S.)
0.7 GHz to 3.5 GHz	Silicon	SPDT	–40°C to +85°C	24-lead, 4 mm × 4 mm LFCSP	10.04

Phase Shifters and Vector Modulators

Analog Phase Shifters

Part Number	Description	Frequency (GHz)	Loss (dB)	Phase Range @ Min Frequency (°)	Phase Range @ Max Frequency (°)	2 nd Harmonic @ Pin = -10 dBm (dBc)	Input IP3 (dBm)	Control Voltage Range (V)	Package (mm)	ECCN Code	Ordering Part Number
HMC247	Analog phase shifter	5 to 18	4	400	120	-80	32	0 to -10	Die	EAR 99	HMC247
HMC877	Analog time delay/phase shifter	8 to 23	—	504	485	-35	—	2.7 to 3.9	3 × 3 SMT	EAR 99	HMC877LC3

Digital Phase Shifters

Part Number	Description	Frequency (GHz)	Loss (dB)	Phase Range Frequency (°)	Phase Adjust Resolution	RMS Phase Error (°)	Input IP3 (dBm)	Input P1dB (dBm)	Package (mm)	ECCN Code	Ordering Part Number
HMC647A	6-bit digital phase shifter	2.5 to 3.1	4	360	6-bit, 5.625°	1.5	50	31	6 × 6 LFCSP	EAR 99	HMC647ALP6E
HMC648A	6-bit digital phase shifter	2.9 to 3.9	5	360	6-bit, 5.625°	1.2	45	31	6 × 6 LFCSP	EAR 99	HMC648ALP6E
HMC649A	6-bit digital phase shifter	3 to 6	8	360	6-bit, 5.625°	4	40	31	6 × 6 LFCSP	EAR 99	HMC649ALP6E
HMC1133	6-bit digital phase shifter	5 to 6	5	360	6-bit, 5.625°	2.8	46	30	5 × 5 LFCSP	EAR 99	HMC1133LP5E
HMC543A	4-bit digital phase shifter	8 to 12	6.5	360	4-bit, 22.5°	4	40	24.5	4 × 4 LFCSP	EAR 99	HMC543ALC4B
HMC642A	6-bit digital phase shifter	9 to 12.5	7	360	6-bit, 5.625°	4.5	35	30	5 × 5 LFCSP	EAR 99	HMC642ALC5
HMC936A New	6-bit digital phase shifter	12 to 14	5	360	6-bit, 5.625°	1.2	45	29	6 × 6 LFCSP	EAR 99	HMC936ALP6E
HMC644A	5-bit digital phase shifter	15 to 18.5	7.5	360	5-bit, 11.25°	3.5	40	23	5 × 5 LFCSP	EAR 99	HMC644ALC5

Vector Modulators

Part Number	Description	Frequency (GHz)	I/Q Bandwidth (MHz)	Noise Floor (dBm/Hz)	Gain Range (dB)	Phase Range (°)	Input IP3 (dBm)	P1dB (dBm)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
HMC630	Vector modulator	0.7 to 1	180	-162	40	360	34	17	8	92	3 × 3 LFCSP	EAR 99	HMC630LP3E
AD8340	Vector modulator	0.7 to 1	230	-149	—	360	—	11	5	130	4 × 4 LFCSP	5A991.b	AD8340ACPZ-WP
ADL5390	Vector modulator	0.2 to 2.4	230	-150	—	360	—	13	5	130	4 × 4 LFCSP	5A991.b	ADL5390ACPZ-REEL7
AD8341	Vector modulator	1.5 to 2.4	230	-151	—	360	—	8.5	5	130	4 × 4 LFCSP	5A991.b	AD8341ACPZ-WP
HMC500	Vector modulator	1.8 to 2.2	150	-162	40	360	33	16	8	90	3 × 3 LFCSP	EAR 99	HMC500LP3E
HMC631	Vector modulator	1.8 to 2.7	160	-160	40	360	35	21	8	93	3 × 3 LFCSP	EAR 99	HMC631LP3E

Analog Multipliers

Part Number	Description	Frequency (GHz)	Dynamic Range (dB)	Accuracy (dB)	Response Time (ns)	V _S (V)	I _{SY} (mA)	Package (mm)	ECCN Code	Ordering Part Number
ADL5391	RF/IF multiplier	0 to 2	60	±0.2	60	4.75 to 5.5	135	3 × 3 LFCSP	5A991.b	ADL5391ACPZ-WP

Timing ICs and Clocks

Clock Dividers and Distribution

Part Number	Clock Function	Configuration/ Programming Interface	Number of Outputs	Output Frequency	Output Logic	Power Dissipation	Input Frequency	Package (mm)	ECCN Code	Ordering Part Number
AD9513	—	—	3	800	CMOS, LVDS	—	—	32-lead LFCSP	EAR 99	AD9513BCPZ-REEL7
LTC6954-1	Distribution	SPI	3	1400	LVPECL	1	1 to 1400	4 × 7 QFN	EAR 99	LTC6954IUFF-1#TRPBF
LTC6954-2	Distribution	SPI	3	1400	CMOS, LVDS, LVPECL	0.94	1 to 1400	4 × 7 QFN	EAR 99	LTC6954IUFF-2#TRPBF
LTC6954-3	Distribution	SPI	3	1400	CMOS, LVDS, LVPECL	0.9	1 to 1400	4 × 7 QFN	EAR 99	LTC6954IUFF-3#TRPBF
LTC6954-4	Distribution	SPI	3	1400	CMOS, LVDS	0.9	1 to 1400	4 × 7 QFN	EAR 99	LTC6954IUFF-4#TRPBF
AD9515	—	—	2	1600	CMOS, LVDS, LVPECL	—	—	32-lead LFCSP	EAR 99	AD9515BCPZ-REEL7
HMC7043	Distribution	SPI	14	3200	CMOS, LVDS, LVPECL, CML	1.5	200 to 6000	7 × 7 LFCSP	EAR 99	HMC7043LP7FE
HMC6832	Distribution	Pin select	8	3500	LVDS, LVPECL	0.5	10 to 3500	5 × 5 LFCSP	EAR 99	HMC6832ALP5LE

Multioutput Clock Generators

Part Number	Description	Supply Voltage (V)	Number of Reference Inputs	Number of Outputs	Number of Dividers	Number of Delay Lines	On-Chip VCO or DCO	Max Output Frequency (MHz)	Output Logic	Wideband Random Jitter (ps rms)	I/O Interface	Package (mm)	ECCN Code	Ordering Part Number
HMC7044	—	3.3	4	14	14	14	Yes	3200	CMOS, LVDS, LVPECL, CML	0.044	Serial	68-lead LFCSP	EAR 99	HMC7044LP10BETR
AD9510	—	3.3	1	8	8	2	No	1200	CMOS, LVDS, LVPECL	0.225	Serial	64-lead LFCSP	EAR 99	AD9510BCPZ-REEL7
AD9511	—	3.3	1	5	5	1	No	1200	CMOS, LVDS, LVPECL	0.225	Serial	48-lead LFCSP	EAR 99	AD9511BCPZ-REEL7
AD9516-0	—	3.3	2	14	5	4	Yes	2950	CMOS, LVDS, LVPECL	<0.4	Serial	64-lead LFCSP	EAR 99	AD9516-0BCPZ-REEL7
AD9516-1	—	3.3	2	14	5	4	Yes	2650	CMOS, LVDS, LVPECL	<0.4	Serial	64-lead LFCSP	EAR 99	AD9516-1BCPZ-REEL7
AD9516-2	—	3.3	2	14	5	4	Yes	2335	CMOS, LVDS, LVPECL	<0.4	Serial	64-lead LFCSP	EAR 99	AD9516-2BCPZ-REEL7
AD9516-3	—	3.3	2	14	5	4	Yes	2250	CMOS, LVDS, LVPECL	<0.4	Serial	64-lead LFCSP	EAR 99	AD9516-3BCPZ-REEL7
AD9516-4	—	3.3	2	14	5	4	Yes	1800	CMOS, LVDS, LVPECL	<0.4	Serial	64-lead LFCSP	EAR 99	AD9516-4BCPZ-REEL7
AD9516-5	—	3.3	2	14	5	4	No	2400	CMOS, LVDS, LVPECL	<0.4	Serial	64-lead LFCSP	EAR 99	AD9516-5BCPZ-REEL7
AD9525	—	3.3	3	9	2	0	No	3600	LVPECL/CM	0.08	Serial	48-lead LFCSP	EAR 99	AD9525BCPZ-REEL7
AD9517-0	—	3.3	2	12	4	4	Yes	2950	CMOS, LVDS, LVPECL	<0.4	Serial	48-lead LFCSP	EAR 99	AD9517-0ABCPZ-RL7
AD9517-1	—	—	—	—	—	—	—	2650	—	—	—	—	EAR 99	AD9517-1ABCPZ-RL7
AD9517-2	—	—	—	—	—	—	—	2335	—	—	—	—	EAR 99	AD9517-2ABCPZ-RL7
AD9517-3	—	—	—	—	—	—	—	2250	—	—	—	—	EAR 99	AD9517-3ABCPZ-RL7
AD9517-4	—	—	—	—	—	—	—	1800	—	—	—	—	EAR 99	AD9517-4ABCPZ-RL7
AD9518-0	—	3.3	2	6	3	0	Yes	2950	LVPECL	<0.4	Serial	48-lead LFCSP	EAR 99	AD9518-0ABCPZ-RL7
AD9518-1	—	—	—	—	—	—	—	2650	—	—	—	—	EAR 99	AD9518-1ABCPZ-RL7
AD9518-2	—	—	—	—	—	—	—	2335	—	—	—	—	EAR 99	AD9518-2ABCPZ-RL7
AD9518-3	—	—	—	—	—	—	—	2250	—	—	—	—	EAR 99	AD9518-3ABCPZ-RL7
AD9518-4	—	—	—	—	—	—	—	1800	—	—	—	—	EAR 99	AD9518-4ABCPZ-RL7
AD9520-0	—	3.3	2	12/24	4	0	Yes	2950	LVPECL, CMOS	<0.4	Serial with EEPROM	64-lead LFCSP	EAR 99	AD9520-0BCPZ-REEL7
AD9520-1	—	—	—	—	—	—	—	2650	—	—	—	—	EAR 99	AD9520-1BCPZ-REEL7
AD9520-2	—	—	—	—	—	—	—	2335	—	—	—	—	EAR 99	AD9520-2BCPZ-REEL7
AD9520-3	—	—	—	—	—	—	—	1800, 2250	—	—	—	—	EAR 99	AD9520-3BCPZ-REEL7
AD9520-5	—	—	—	—	—	—	No	2400	—	—	—	—	EAR 99	AD9520-5BCPZ-REEL7

Multioutput Clock Generators (Continued)

Part Number	Description	Supply Voltage (V)	Number of Reference Inputs	Number of Outputs	Number of Dividers	Number of Delay Lines	On-Chip VCO or DCO	Max Output Frequency (MHz)	Output Logic	Wideband Random Jitter (ps rms)	I/O Interface	Package (mm)	ECCN Code	Ordering Part Number
AD9522-0	—	3.3	2	12/24	4	0	Yes	800	LVDS, CMOS	<0.4	Serial with EEPROM	64-lead LFCSP	EAR 99	AD9522-0BCPZ-REEL7
AD9522-1	—	—	—	—	—	—	—	—	—	—	—	—	EAR 99	AD9522-1BCPZ-REEL7
AD9522-2	—	—	—	—	—	—	—	—	—	—	—	—	EAR 99	AD9522-2BCPZ-REEL7
AD9522-3	—	—	—	—	—	—	—	—	—	—	—	—	EAR 99	AD9522-3BCPZ-REEL7
AD9522-4	—	—	—	—	—	—	—	—	—	—	—	—	EAR 99	AD9522-4BCPZ-REEL7
AD9522-5	—	—	—	—	—	—	No	—	—	—	—	—	EAR 99	AD9522-5BCPZ-REEL7
AD9523	—	3.3	2	14	14	0	Yes	1000	CMOS, HSTL, LVDS, LVPECL	0.225	Serial	72-lead LFCSP	EAR 99	AD9523BCPZ-REEL7
AD9523-1	—	—	—	—	—	—	—	—	—	0.187	—	—	EAR 99	AD9523-1BCPZ-REEL7
AD9524	—	3.3	2	6	6	0	Yes	1000	CMOS, HSTL, LVDS, LVPECL	0.225	Serial	48-lead LFCSP	EAR 99	AD9524BCPZ-REEL7
LTC6950	—	3.3	1	5	5	0	No	1400	CMOS, LVDS, LVPECL	0.115	Serial	48-lead QFN	EAR 99	LTC6950IUHH#TRPBF
LTC6951	—	3.3, 5	1	5	5	0	Yes	2500	LVDS, CML	0.105	Serial	40-lead QFN	EAR 99	LTC6951IUHF#TRPBF
LTC6951-1	—	3.3, 5	1	5	5	0	Yes	2700	LVDS, CML	0.105	Serial	40-lead QFN	EAR 99	LTC6951IUHF-1#TRPBF

Clock Generators and Synchronizers


Part Number	Supply Voltage (V)	Number of Reference Inputs	Number of Outputs	Number of Dividers	Number of Delay Lines	On-Chip VCO or DCO	Max Output Frequency (MHz)	Output Logic	Wideband Random Jitter (ps rms)	I/O Interface	Package (mm)	ECCN Code	Ordering Part Number
AD9547	1.8, 3.3	2	2	2	1	Yes	450	LVDS, LVPE	0.7	Serial	64-lead LFCSP	EAR 99	AD9547BCPZ-REEL7
AD9549	1.8, 3.3	2	2	1	0	Yes	750	CMOS, HSTL	0.6	Serial	64-lead LFCSP	EAR 99	AD9549ABCPZ-REEL7
AD9548	1.8, 3.3	8	8	4	1	Yes	450	LVDS, LVPECL, CMOS	0.7	Serial	88-lead LFCSP	EAR 99	AD9548BCPZ-REEL7
AD9550	1.8, 3.3	1	2	2	0	Yes	810	LVPECL, LV	0.5	N/A	32-lead LFCSP	EAR 99	AD9550BCPZ-REEL7
AD9552	1.8, 3.3	2	2	2	0	Yes	900	LVDS, LVPE	0.5	Serial	32-lead LFCSP	EAR 99	AD9552BCPZ-REEL7
AD9553	1.8, 3.3	3	2	2	0	Yes	810	LVDS, LVPE	0.5	Serial	32-lead LFCSP	EAR 99	AD9553BCPZ-REEL7
AD9557	1.8, 3.3	2	2	2	0	Yes	1250	HSTL, LVDS	0.5	Serial	40-lead LFCSP	EAR 99	AD9557BCPZ-REEL7
AD9558	1.8, 3.3	4	6	4	0	Yes	1250	HSTL, LVDS	0.5	Serial	64-lead LFCSP	EAR 99	AD9558BCPZ-REEL7
AD9559	1.8, 3.3	4	4	4	0	Yes	1250	HSTL, LVDS	0.5	Serial	72-lead LFCSP	EAR 99	AD9559BCPZ-REEL7

Clock Buffers

Part Number	Supply Voltage (V)	Number of Inputs	Number of Outputs	Max Output Frequency (MHz)	Output Logic	Wideband Random Jitter (ps rms)	I/O Interface	Package (mm)	ECCN Code	Ordering Part Number
LTC6957-1	3.3	1	2	300	LVPECL	0.12	—	12-lead QFN, MSOP	EAR99	LTC6957IDD-1#TRPBF
LTC6957-2	3.3	1	2	300	LVDS	0.12	—	12-lead QFN, MSOP	EAR99	LTC6957IDD-2#TRPBF
LTC6957-3	3.3	1	2	300	CMOS	0.12	—	12-lead QFN, MSOP	EAR99	LTC6957IDD-3#TRPBF
LTC6957-4	3.3	1	2	300	CMOS	0.12	—	12-lead QFN, MSOP	EAR99	LTC6957IDD-4#TRPBF
ADCLK905	2.5 to 3.3	1	1	6000	ECL, PECL, LVPECL	0.06	—	16-lead LFCSP	EAR 99	ADCLK905BCPZ-WP
ADCLK907	2.5 to 3.3	2	2	6000	ECL, PECL, LVPECL	0.06	—	16-lead LFCSP	EAR 99	ADCLK907BCPZ-WP
ADCLK925	2.5 to 3.3	1	2	6000	ECL, PECL, LVPECL	0.06	—	16-lead LFCSP	EAR 99	ADCLK925BCPZ-WP
ADCLK914	3.3	1	1	7500	HVDS, CML	0.11	—	16-lead LFCSP	EAR 99	ADCLK914BCPZ-WP
ADCLK954	3.3	2	12	4800	LVPECL	0.075	—	40-lead LFCSP	EAR 99	ADCLK954BCPZ-REEL7
ADCLK946	3.3	1	6	4800	LVPECL	0.075	—	24-lead LFCSP	EAR 99	ADCLK946BCPZ-REEL7
ADCLK854	1.8	2	12	1200	LVDS, CMOS	0.15	—	48-lead LFCSP	EAR 99	ADCLK854BCPZ-REEL7
ADCLK846	1.8	1	6	1200	LVDS, CMOS	0.15	—	24-lead LFCSP	EAR 99	ADCLK846BCPZ-REEL7
HMC6832	2.5 or 3.3	2	8	3500	LVDS, LVPECL	0.01	Pin Select	28-lead LFCSP	EAR 99	HMC6832ALP5LE

RF Design Tools

ADI supports its broad product portfolio with a comprehensive suite of design tools. These tools reduce design risk and time to market by making the overall RF-to-digital design process simpler, faster, more accurate, and more robust.

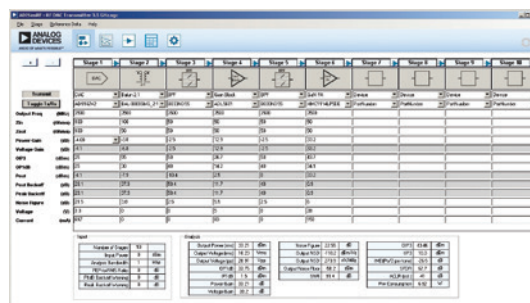

ADIsimRF

ADIsimRF™ provides calculations for the most important parameters within the RF signal chain, including cascaded gain, noise figure, IP3, P1dB, and total power consumption.

Visit analog.com/adisimrf

ADIsimPLL

ADIsimPLL™ enables the rapid and reliable evaluation of ADI's high performance PLL synthesizers. It is the most comprehensive PLL design tool available today. It performs simulations of all key nonlinear effects that impact PLL performance and removes iterations from the design process, thereby speeding design times.

Visit analog.com/adisimpll

ADIsimFrequencyPlanner

ADIsimFrequencyPlanner enables fast, accurate simulation and elimination of integer boundary spurs from Analog Devices PLL synthesizers. The tool analyzes the user's output requirements, and then optimizes the PFD frequency for each output step to give the best integer boundary spur performance. The optimum PFD frequency is selected by changing the output divider of the clock generation chip and changing the reference input divider of the PLL/VCO.

Visit analog.com/adisimfrequencyplanner

ADIsimCLK

Developed specifically for ADI's range of ultralow jitter clock distribution and clock generation products, ADIsimCLK™ allows users to rapidly develop, evaluate, and optimize designs. It enables direct modification of parameters, such as loop bandwidth, divide ratios, phase offsets, and output frequencies, and shows the performance effects of the changes in real time.

Visit analog.com/adisimclk

Virtual Eval

Virtual Eval™ accurately models the typical performance characteristics of many of ADI's high speed converters. It reproduces the errors associated with both static and dynamic features such as ac linearity, clock jitter, and many other product specific anomalies.

Visit analog.com/virtualeval

Why ADI?

We're the Only Company in the Industry That Offers You the Benefits of a Complete Signal Chain Solution



Quicker Time to Market



**Software, Tools, and Support
Beyond Just Components**



**Reduced Supply Chain
Management Costs with
ADI as Your Single Supplier**



**Improved Experience with
Single Point of Contact**

We Have the Broadest Selection of High Performance, High Frequency, and Wideband Parts



**Industry-Leading
Performance to Engineer
Next Generation of
Breakthrough Applications**



**Easier to Find the Right
Part to Fit Your Specific
Design Needs**



**Wideband and Integrated
Parts Simplify Your Design
and Reduce BOM Cost**

We Offer the Proven Quality and the Reliability of an Industry Leader



Index

AD831	19	AD9520-1	47	ADF4212L	30	ADL5380	24	ADRF6510	15	HMC326	11
AD8283	27	AD9520-2	47	ADF4252	30	ADL5382	24	ADRF6516	15	HMC327	12
AD8284	27	AD9520-3	47	ADF4350	32	ADL5385	24	ADRF6518	15	HMC329A	21
AD8302	41	AD9520-5	47	ADF4351	32	ADL5386	24	ADRF6520	4, 15	HMC337	21
AD8306	41	AD9522-0	48	ADF4355	32	ADL5387	24	ADRF6601	22	HMC338	21
AD8307	41	AD9522-1	48	ADF4355-2	32	ADL5390	46	ADRF6602	23	HMC339	21
AD8309	41	AD9522-2	48	ADF4355-3	32	ADL5391	46	ADRF6603	23	HMC341	10
AD8310	41	AD9522-3	48	ADF4356	6, 32	ADL5500	41	ADRF6604	23	HMC342	10
AD8312	41	AD9522-4	48	ADF4360-0	31	ADL5501	41	ADRF6612	23	HMC344A	43
AD8313	41	AD9522-5	48	ADF4360-1	31	ADL5502	41, 42	ADRF6614	23	HMC345A	43
AD8314	41	AD9523	48	ADF4360-2	31	ADL5504	41	ADRF6620	22	HMC346A	16
AD8317	41	AD9523-1	48	ADF4360-3	31	ADL5505	41	ADRF6655	22	HMC347A	6, 43
AD8318	41	AD9524	48	ADF4360-4	31	ADL5506	41	ADRF6658	22	HMC349A	43
AD8319	41	AD9525	47	ADF4360-5	31	ADL5511	41, 42	ADRF6701	25	HMC356	9
AD8340	46	AD9547	48	ADF4360-6	31	ADL5513	41	ADRF6702	25	HMC358	34
AD8341	46	AD9548	48	ADF4360-7	31	ADL5519	41	ADRF6703	25	HMC361	37
AD8342	19	AD9549	48	ADF4360-8	31	ADL5521	9	ADRF6704	25	HMC362	37
AD8343	19	AD9550	48	ADF4360-9	31	ADL5523	9	ADRF6720	25	HMC363	37
AD8344	19	AD9552	48	ADF5000	37	ADL5530	10	ADRF6720-27	25	HMC365	37
AD8345	24	AD9553	48	ADF5001	37	ADL5531	11	ADRF6750	25	HMC368	37
AD8346	24	AD9557	48	ADF5002	37	ADL5534	11	ADRF6755	25	HMC369	37
AD8347	24	AD9558	48	ADF5355	32	ADL5535	11	ADRF6780	22, 24	HMC370	37
AD8348	24	AD9559	48	ADF5901	26	ADL5536	11	ADRF6801	25	HMC372	9
AD8349	24	ADA4961	8	ADF5904	26	ADL5541	11	ADRF6806	25	HMC373	9
AD8350	8	ADAR7251	27	ADF41020	30	ADL5542	11	ADRF6807	25	HMC374	9
AD8351	8	ADCLK846	49	ADG901	43	ADL5544	11	ADRF6820	25	HMC375	9
AD8352	8	ADCLK854	49	ADG902	43	ADL5545	11	ADRF6850	25	HMC376	9
AD8354	10	ADCLK905	49	ADG904	43	ADL5561	8	ADSP-2147x	27	HMC382	9
AD8361	41	ADCLK907	49	ADG904-R	43	ADL5562	8	ADSP-BF70x	27	HMC383	12
AD8362	41	ADCLK914	49	ADG918	43	ADL5565	8	HMC129A	20	HMC384	34
AD8363	41	ADCLK925	49	ADG919	43	ADL5566	8	HMC190B	43	HMC385	34
AD8364	41	ADCLK946	49	ADG936	43	ADL5567	3, 8	HMC194A	43	HMC386	34
AD8366	15	ADCLK954	49	ADG936-R	43	ADL5590	24	HMC197B	43	HMC388	34
AD8367	15	ADF4001	30	ADL5201	8, 15	ADL5591	24	HMC199A	43	HMC389	34
AD8368	15	ADF4002	30	ADL5202	8, 15	ADL5601	11	HMC213B	20	HMC390	34
AD8369	15	ADF4007	30	ADL5205	3, 8	ADL5602	11	HMC218B	20	HMC391	34
AD8370	8, 15	ADF4106	30	ADL5240	15	ADL5604	11	HMC219B	5, 20	HMC392A	3, 9
AD8372	8, 15	ADF4107	30	ADL5243	15	ADL5605	11	HMC221B	43	HMC394	37
AD8375	8, 15	ADF4108	30	ADL5246	15	ADL5606	11	HMC232A	43	HMC395	10
AD8376	8, 15	ADF4110	30	ADL5320	11	ADL5610	11	HMC241A	43	HMC396	10
AD9510	47	ADF4111	30	ADL5321	11	ADL5611	11	HMC244A	43	HMC397	10
AD9511	47	ADF4113	30	ADL5324	11	ADL5721	3, 9	HMC245A	43	HMC398	35
AD9513	47	ADF4113HV	30	ADL5330	15	ADL5723	3, 10	HMC247	46	HMC404	21
AD9515	47	ADF4116	30	ADL5331	15	ADL5724	3, 10	HMC252A	44	HMC405	10
AD9516-0	47	ADF4117	30	ADL5336	15	ADL5725	3, 10	HMC253A	44	HMC406	12
AD9516-1	47	ADF4118	30	ADL5350	19	ADL5726	3, 10	HMC260A	21	HMC407	12
AD9516-2	47	ADF4150	30	ADL5353	20	ADL5801	19	HMC263	10	HMC408	12
AD9516-3	47	ADF4150HV	30	ADL5354	20	ADL5802	19	HMC264	21	HMC409	12
AD9516-4	47	ADF4151	30	ADL5355	20	ADL5811	19	HMC264	21	HMC412B	5, 21
AD9516-5	47	ADF4152HV	5, 30	ADL5356	20	ADL5812	19	HMC265	21	HMC413	12
AD9517-0	47	ADF4153	30	ADL5357	19	ADL5902	41	HMC270A	6, 43	HMC414	12
AD9517-1	47	ADF4153A	30	ADL5358	19	ADL5903	41	HMC273A	16	HMC415	12
AD9517-2	47	ADF4154	30	ADL5363	20	ADL5904	41	HMC284A	43	HMC416	34
AD9517-3	47	ADF4155	30	ADL5365	20	ADL5906	41	HMC291S	4, 16	HMC424A	4, 16
AD9517-4	47	ADF4156	30	ADL5367	19	ADL5910	6, 42	HMC292A	21	HMC425A	16
AD9518-0	47	ADF4157	30	ADL5369	19	ADL6010	41, 42	HMC305S	16	HMC427A	44
AD9518-1	47	ADF4158	26, 30	ADL5370	24	ADL6012	42	HMC306A	16	HMC429	34
AD9518-2	47	ADF4159	26, 30	ADL5371	24	ADRF5020	6, 43	HMC311	10	HMC430	34
AD9518-3	47	ADF4169	30	ADL5372	24	ADRF5021	6, 43	HMC313	10	HMC431	34
AD9518-4	47	ADF4193	30	ADL5373	24	ADRF5040	6, 44	HMC321A	44	HMC432	37
AD9520-0	47	ADF4196	30	ADL5375	24	ADRF5130	6, 43	HMC322A	44	HMC433	37

HMC434.....	37	HMC532.....	34	HMC632.....	34	HMC735.....	35	HMC847.....	40	HMC1049.....	11
HMC435A.....	43	HMC533.....	35	HMC633.....	12	HMC736.....	35	HMC848.....	40	HMC1055.....	43
HMC437.....	37	HMC534.....	34	HMC634.....	12	HMC737.....	35	HMC849A.....	43	HMC1056.....	21
HMC438.....	37	HMC536.....	43	HMC635.....	12	HMC738.....	35	HMC850.....	39	HMC1057.....	21
HMC439.....	38	HMC539A.....	4, 16	HMC636.....	11	HMC739.....	35	HMC851.....	40	HMC1058.....	21
HMC440.....	30	HMC540S.....	16	HMC637A.....	4, 11	HMC740.....	11	HMC852.....	39	HMC1061.....	40
HMC441.....	12	HMC542B.....	16	HMC639.....	9	HMC741.....	11	HMC853.....	39	HMC1063.....	21
HMC442.....	12	HMC543A.....	46	HMC641A.....	43	HMC742A.....	15	HMC854.....	40	HMC1065.....	22
HMC443.....	37	HMC544A.....	43	HMC642A.....	46	HMC744.....	39	HMC855.....	40	HMC1081.....	21
HMC444.....	37	HMC545A.....	43	HMC644A.....	46	HMC745.....	40	HMC858.....	39	HMC1082.....	12
HMC445.....	37	HMC546.....	43	HMC646.....	43	HMC746.....	39	HMC859.....	39	HMC1084.....	44
HMC447.....	37	HMC547A.....	6, 43	HMC647A.....	46	HMC747.....	39	HMC877.....	46	HMC1086.....	13
HMC448.....	37	HMC549.....	9	HMC648A.....	46	HMC748.....	39	HMC900.....	15	HMC1087.....	13
HMC450.....	12	HMC550A.....	43	HMC649A.....	46	HMC749.....	39	HMC902.....	9	HMC1093.....	21
HMC451.....	12	HMC553A.....	20	HMC650.....	16	HMC751.....	10	HMC903.....	9	HMC1094.....	41
HMC452.....	12	HMC554A.....	21	HMC651.....	16	HMC752.....	10	HMC904.....	22	HMC1095.....	16
HMC453.....	12	HMC557A.....	5, 20	HMC652.....	16	HMC753.....	9	HMC905.....	37	HMC1096.....	37
HMC454.....	12	HMC558A.....	5, 20	HMC653.....	16	HMC754.....	10	HMC909.....	41	HMC1097.....	24
HMC455.....	12	HMC559.....	11	HMC654.....	16	HMC759.....	16	HMC913.....	42	HMC1099.....	13
HMC457.....	12	HMC560A.....	21	HMC656.....	16	HMC760.....	40	HMC920.....	13	HMC1105.....	38
HMC459.....	11	HMC561.....	37	HMC657.....	16	HMC764.....	32	HMC930A.....	4, 11	HMC1106.....	21
HMC460.....	11	HMC561.....	37	HMC658.....	16	HMC765.....	32	HMC936A.....	6, 46	HMC1110.....	37
HMC461.....	12	HMC562.....	12	HMC659.....	11	HMC767.....	32	HMC939A.....	4, 16	HMC1113.....	22
HMC462.....	12	HMC564.....	9	HMC661.....	40	HMC769.....	32	HMC940.....	39	HMC1114.....	4, 13
HMC463.....	11, 12	HMC565.....	9	HMC662.....	41	HMC772.....	9	HMC941A.....	4, 16	HMC1118.....	43
HMC464.....	11	HMC566.....	10	HMC666.....	20	HMC773A.....	20	HMC942.....	37	HMC1119.....	4, 16
HMC465.....	11	HMC570.....	22	HMC678.....	39	HMC774A.....	21	HMC943A.....	13	HMC1120.....	41, 42
HMC465.....	11	HMC571.....	22	HMC679.....	39	HMC778.....	32	HMC948.....	41	HMC1121.....	4, 12
HMC466.....	34	HMC572.....	22	HMC680.....	15	HMC783.....	32	HMC951B.....	22	HMC1122.....	16
HMC468A.....	16	HMC573.....	37	HMC681A.....	15	HMC784A.....	6, 43	HMC952A.....	4, 12	HMC1126.....	12
HMC470A.....	4, 16	HMC574A.....	6, 43	HMC682.....	20	HMC787A.....	5, 20	HMC953.....	39	HMC1127.....	12
HMC472A.....	16	HMC575.....	37	HMC683.....	19	HMC788A.....	10	HMC954.....	40	HMC1131.....	13
HMC480.....	10	HMC576.....	37	HMC684.....	19	HMC789.....	11	HMC955.....	40	HMC1132.....	4, 13
HMC487.....	12	HMC577.....	37	HMC685.....	20	HMC792A.....	16	HMC958.....	39	HMC1133.....	46
HMC490.....	10	HMC578.....	37	HMC686.....	19	HMC794.....	37	HMC959.....	39	HMC1144.....	13
HMC492.....	37	HMC579.....	37	HMC687.....	20	HMC795.....	24	HMC960.....	15	HMC1160.....	34
HMC493.....	37	HMC582.....	34	HMC688.....	20	HMC802A.....	16	HMC962.....	10	HMC1161.....	34
HMC494.....	37	HMC583.....	34	HMC689.....	20	HMC807.....	32	HMC963.....	9	HMC1162.....	34
HMC498.....	12	HMC584.....	34	HMC694.....	15	HMC812A.....	16	HMC966.....	22	HMC1163.....	34
HMC499.....	12	HMC586.....	35	HMC695.....	37	HMC813.....	42	HMC967.....	22	HMC1164.....	34
HMC500.....	46	HMC587.....	35	HMC698.....	30	HMC814.....	37	HMC973A.....	4, 16	HMC1165.....	34
HMC504.....	10	HMC588.....	35	HMC699.....	30	HMC815B.....	22	HMC977.....	22	HMC1166.....	34
HMC505.....	34	HMC589A.....	10	HMC700.....	30	HMC820.....	31	HMC980.....	13	HMC1167.....	34
HMC506.....	34	HMC590.....	12	HMC701.....	30	HMC821.....	31	HMC981.....	13	HMC1168.....	34
HMC507.....	34	HMC591.....	12	HMC702.....	30	HMC822.....	31	HMC983.....	37	HMC1169.....	34
HMC508.....	34	HMC595A.....	43	HMC703.....	30	HMC824.....	31	HMC984.....	38	HMC1190A.....	23
HMC509.....	34	HMC596.....	44	HMC704.....	30	HMC826.....	31	HMC985A.....	16	HMC1197.....	25
HMC510.....	34	HMC598.....	37	HMC705.....	37	HMC828.....	31	HMC986A.....	6, 43	HMC3587.....	10
HMC511.....	34	HMC599.....	9	HMC712A.....	16	HMC829.....	32	HMC996.....	15	HMC3653.....	11
HMC512.....	34	HMC600.....	41	HMC713.....	41	HMC830.....	32	HMC997.....	15	HMC3716.....	6, 38
HMC513.....	34	HMC601.....	41	HMC717A.....	3, 9	HMC831.....	31	HMC998A.....	11	HMC4069.....	6, 30
HMC514.....	34	HMC602.....	41	HMC720.....	39	HMC832.....	32	HMC1010.....	41	HMC5805A.....	4, 11
HMC515.....	34	HMC606.....	11	HMC721.....	40	HMC833.....	32	HMC1013.....	42	HMC6146B.....	22
HMC516.....	10	HMC608.....	12	HMC722.....	39	HMC834.....	32	HMC1018A.....	4, 16	HMC6147A.....	22
HMC517.....	10	HMC611.....	41	HMC723.....	39	HMC835.....	32	HMC1019A.....	4, 16	HMC6187.....	15
HMC518.....	10	HMC612.....	41	HMC724.....	39	HMC836.....	31	HMC1020.....	41	HMC6300.....	26
HMC519.....	10	HMC613.....	42	HMC725.....	40	HMC837.....	31	HMC1021.....	41, 42	HMC6301.....	26
HMC520A.....	5, 21	HMC618A.....	9	HMC726.....	39	HMC838.....	31	HMC1023.....	15	HMC6505A.....	22
HMC521A.....	21	HMC624A.....	16	HMC727.....	39	HMC839.....	31	HMC1027.....	40	HMC6545.....	40
HMC524A.....	21	HMC625B.....	4, 15	HMC728.....	39	HMC840.....	31	HMC1030.....	41, 42	HMC6787A.....	22
HMC525A.....	21	HMC628.....	15	HMC729.....	39	HMC841.....	39	HMC1031.....	30	HMC6789B.....	5, 22
HMC529.....	34	HMC629A.....	4, 16	HMC732.....	35	HMC842.....	39	HMC1040.....	10	HMC6832.....	47, 49
HMC530.....	34	HMC630.....	46	HMC733.....	35	HMC843.....	39	HMC1044.....	38	HMC6980.....	11
HMC531.....	34	HMC631.....	46	HMC734.....	35	HMC844.....	40	HMC1048A.....	20	HMC6981.....	12

HMC7043.....47	HMC-ALH311.....10	HMC-VVD102.....16	LT5578.....19	LTC5584.....24	LTC6430B-20.....9
HMC7044.....47	HMC-ALH313.....10	HMC-VVD104.....16	LT5579.....19	LTC5585.....24	LTC6431A-15.....11
HMC7149.....13	HMC-ALH364.....10	HMC-VVD106.....16	LT5581.....41	LTC5586.....5, 24	LTC6431A-20.....11
HMC7229.....4, 13	HMC-ALH369.....10	HMC-XDB112.....38	LT6402-6.....8	LTC5587.....41	LTC6431B-15.....11
HMC7357.....12	HMC-ALH376.....10	HMC-XTB110.....38	LT6402-12.....8	LTC5588-1.....24	LTC6431B-20.....11
HMC7441.....13	HMC-ALH382.....10	LT1993-2.....8	LT6402-20.....8	LTC5589.....24	LTC6432A-15.....3, 9
HMC7447.....41	HMC-ALH435.....9	LT1993-4.....8	LT6411.....9	LTC5590.....19	LTC6432B-15.....3, 9
HMC7545.....40	HMC-ALH444.....9	LT1993-10.....8	LTC5505-1.....42	LTC5591.....20	LTC6433A-15.....10
HMC7586.....22, 26	HMC-ALH445.....10	LT1994.....9	LTC5505-2.....42	LTC5592.....20	LTC6433B-15.....10
HMC7587.....22, 26	HMC-ALH476.....10	LT5504.....41	LTC5507.....42	LTC5593.....20	LTC6945.....30
HMC7911.....22	HMC-ALH482.....11	LT5506.....24	LTC5508.....42	LTC5596.....41	LTC6946-1.....31
HMC7912.....22	HMC-ALH508.....10	LT5511.....19	LTC5509.....42	LTC5598.....24	LTC6946-2.....31
HMC7950.....3, 10	HMC-ALH509.....10	LT5512.....19	LTC5510.....20	LTC5599.....24	LTC6946-3.....31
HMC7992.....44	HMC-APH196.....12	LT5514.....15	LTC5530.....42	LTC6400-8.....8	LTC6946-4.....31
HMC8038.....43	HMC-APH403.....13	LT5515.....24	LTC5531.....42	LTC6400-14.....8	LTC6947.....30
HMC8100.....5, 26	HMC-APH460.....13	LT5516.....24	LTC5532.....42	LTC6400-20.....8	LTC6948-1.....32
HMC8108.....5, 22	HMC-APH462.....12	LT5517.....24	LTC5533.....42	LTC6400-26.....8	LTC6948-2.....32
HMC8118.....22, 26	HMC-APH473.....13	LT5519.....19	LTC5535.....42	LTC6401-8.....8	LTC6948-3.....32
HMC8119.....22, 26	HMC-APH478.....12	LT5520.....20	LTC5536.....42	LTC6401-14.....8	LTC6948-4.....32
HMC8120.....15	HMC-APH510.....13	LT5522.....19	LTC5540.....19	LTC6401-20.....8	LTC6950.....48
HMC8121.....15	HMC-APH518.....12	LT5524.....15	LTC5541.....20	LTC6401-26.....8	LTC6951.....48
HMC8191.....5, 21	HMC-APH596.....12	LT5525.....19	LTC5542.....20	LTC6403-1.....8	LTC6951-1.....48
HMC8193.....21	HMC-APH608.....13	LT5526.....19	LTC5543.....20	LTC6404-1.....8	LTC6954-1.....47
HMC8200.....5, 26	HMC-APH633.....13	LT5527.....19	LTC5544.....20	LTC6404-2.....8	LTC6954-2.....47
HMC8325.....3, 10	HMC-APH634.....13	LT5528.....24	LTC5548.....20	LTC6404-4.....8	LTC6954-3.....47
HMC8400.....9	HMC-AUH232.....11	LT5534.....41	LTC5549.....20	LTC6405.....8	LTC6954-4.....47
HMC8401.....3, 9	HMC-AUH249.....11	LT5537.....41	LTC5551.....19	LTC6406.....8	LTC6957-1.....49
HMC8402.....3, 9	HMC-AUH256.....12	LT5538.....41	LTC5552.....20	LTC6409.....9	LTC6957-2.....49
HMC8410.....3, 9	HMC-AUH312.....11	LT5546.....24	LTC5553.....5, 20	LTC6410-6.....9	LTC6957-3.....49
HMC8500.....4, 13	HMC-AUH317.....13	LT5554.....15	LTC5562.....20	LTC6412.....15	LTC6957-4.....49
HMC-ABH209.....13	HMC-AUH318.....13	LT5557.....19	LTC5564.....42	LTC6416.....9	
HMC-ABH241.....13	HMC-AUH320.....13	LT5558.....24	LTC5566.....19	LTC6417.....9	
HMC-ABH264.....13	HMC-MDB169.....21	LT5560.....19	LTC5567.....19	LTC6419.....3, 9	
HMC-ALH102.....11	HMC-MDB171.....21	LT5568.....24	LTC5569.....19	LTC6420-20.....9	
HMC-ALH140.....10	HMC-MDB172.....21	LT5568-2.....24	LTC5576.....20	LTC6421-20.....9	
HMC-ALH216.....10	HMC-MDB218.....21	LT5571.....24	LTC5577.....19	LTC6430A-15.....9	
HMC-ALH244.....10	HMC-MDB277.....21	LT5572.....24	LTC5582.....41	LTC6430A-20.....9	
HMC-ALH310.....10	HMC-SDD112.....43	LT5575.....24	LTC5583.....41	LTC6430B-15.....9	

Design Resources

Circuits from the Lab Reference Designs

Circuits from the Lab® reference designs are engineered and tested for quick and easy system integration to help solve today's analog, mixed-signal, and RF design challenges. These circuits represent easy to understand subsystem level building blocks intended for time-saving evaluation and easy integration. Each reference circuit has been thoroughly documented, and many provide test data, design/layout guidelines, schematics, PCB layout files, bill of materials, device drivers, and evaluation hardware.

Find RF circuits at analog.com/circuits.

**Circuits
from the Lab®**
Reference Designs

EngineerZone

EngineerZone is ADI's online support community for engineers using the company's products to ask products, share knowledge, and search for answers to their design questions.

Collaborate with ADI engineers and other designers in this open forum at ez.analog.com.



Software-Defined Radio Rapid Prototyping and Development Platforms

Analog Devices offers a variety of complete agile RF transceiver reference designs that operate seamlessly within the Xilinx®-FPGA development ecosystem. These rapid prototyping radio platforms drastically reduce design times from months to days by providing verified, production-ready, high performance transceiver signal chains for a wide range of compute-intensive, FPGA-based, software-defined radio applications. When connected to an FPGA development platform, these AD-FMCOMMSX-EBZ platforms provide the complete physical layer and firmware necessary to quickly begin prototyping a wide variety of wireless communications SDR applications.

- ▶ **AD-FMCOMMS1-EBZ:** 2 × 2 complete agile discrete component high performance RF transceiver covering the 400 MHz to 4.0 GHz band.
- ▶ **AD-FMCOMMS2-EBZ:** 2 × 2 complete agile single-chip RF transceiver addressing the entire 56 MHz to 6.0 GHz band, configured for best noise performance at the 2.7 GHz band.
- ▶ **AD-FMCOMMS3-EBZ:** 2 × 2 complete agile single-chip RF transceiver configured for wideband tuning across the 56 MHz to 6.0 GHz band.
- ▶ **AD-FMCOMMS4-EBZ:** 1 × 1 complete agile single-chip RF transceiver configurable for both wideband tuning across the 56 MHz to 6.0 GHz band, and optimized noise performance at 2.7 GHz.

Analog Devices, Inc. Worldwide Headquarters

Analog Devices, Inc.
One Technology Way
P.O. Box 9106
Norwood, MA 02062-9106
U.S.A.
Tel: 781.329.4700
(800.262.5643, U.S.A. only)
Fax: 781.461.3113

Analog Devices, Inc. Europe Headquarters

Analog Devices GmbH
Otli-Aicher-Str. 60-64
80807 München
Germany
Tel: 49.89.76903.0
Fax: 49.89.76903.157

Analog Devices, Inc. Japan Headquarters

Analog Devices, KK
New Pier Takeshiba
South Tower Building
1-16-1 Kaigan, Minato-ku,
Tokyo, 105-6891
Japan
Tel: 813.5402.8200
Fax: 813.5402.1064

Analog Devices, Inc. Asia Pacific Headquarters

Analog Devices
5F, Sandhill Plaza
2290 Zuchongzhi Road
Zhangjiang Hi-Tech Park
Pudong New District
Shanghai, China 201203
Tel: 86.21.2320.8000
Fax: 86.21.2320.8222

©2017 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners. Ahead of What's Possible is a trademark of Analog Devices.
G13181-0-6/17(G)

analog.com



AHEAD OF WHAT'S POSSIBLE™