


TACT Switch™ Low Profile Side Push Type

**NEW
2014**

SKTG Series

Half-mount type with height of 0.85mm above the board

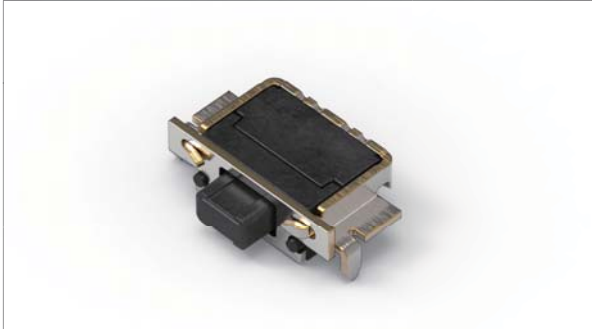

Features

- Mounting in a PC board cut-out improves solder peel strength
- Metal contact optimization enables a 200,000-cycle life despite compact dimensions
- Sealed contact structure ensures a highly reliable switch (IP67 dust and water resistance)

Applications


- Smartphones, tablets, other mobile devices, cameras and wearable electronics

Typical Specifications


Dimensions	3.7 x 3.5 mm (Installed height: 0.85 mm)
Operating force	1.6 N
Travel	0.15 mm
Operating life	200,000 cycles
Maximum rating	12V DC 50mA
Initial contact resistance	500mΩ max.

Dimensions


Unit:mm

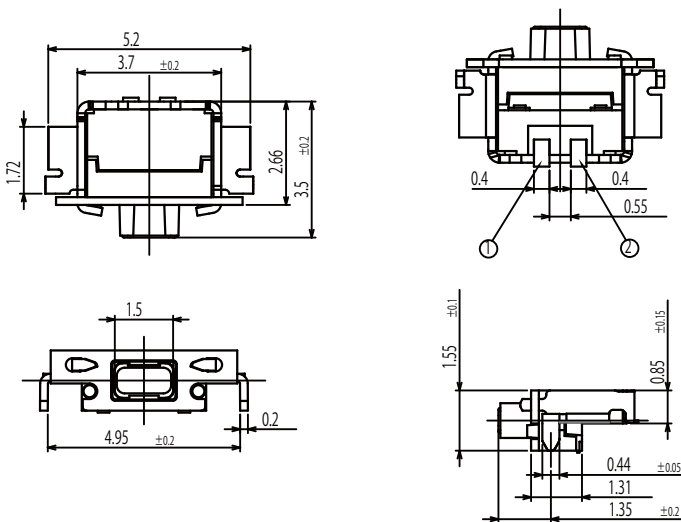

PC Board Mounting Dimensions

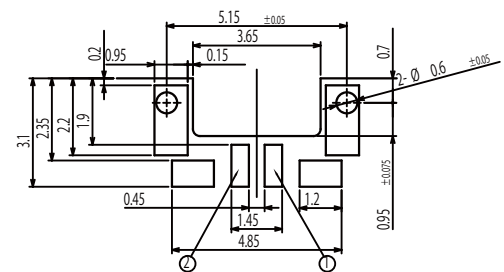

Circuit Diagram



Precautions when handling our products

1. For the export of products which are controlled items subject to foreign and domestic export laws and regulations, you must obtain approval and/or follow the formalities of such laws and regulations.
2. Products must not be used for military and/or antisocial purposes such as terrorism, and shall not be supplied to any party intending to use the products for such purposes.
3. Unless provided for otherwise, the products have been designed and manufactured for application in equipment and devices which are sold to end users in the market, including audio-visual (AV) equipment, electrical home appliances, office machines, information and communication equipment, and amusement equipment. The products are not intended for use in, and must not be used for, any application for nuclear equipment, driving equipment for aerospace or any other unauthorized use.
With the exception of the abovementioned prohibited applications, please contact an Alps sales representative and/or evaluate the total system regarding applicability for applications involving high levels of safety and liability such as medical equipment, burglar alarm equipment, disaster prevention equipment and undersea equipment. Please also incorporate fail-safe design, protection and redundant circuitry, malfunction protection, and/or fire protection into the complete system to ensure safety and reliability of the total system.
4. Before using for automotive applications products which were not specifically designed for use in automotive applications, please contact an Alps sales representative.

Cautions for using this catalog

1. The specifications herein are an overview of the specifications. Obtain official specifications before use.
2. The colors of the products in the catalog may slightly differ from those of the actual products.
3. The external appearance, functions and other specifications herein may be discontinued without prior notice.
4. All product names, company names and names of standards described in this catalog are trademarks or registered trademarks of their respective owners.
5. The contents of this catalog are according to Alps Electric as of October 2014.
6. This catalog is valid until March 31, 2015.

Inquiries about this product

Product Information Center

+81 (3) 5499-8154

Product Information URL

<http://www.alps.com/products/e/>
ALPS ELECTRIC CO., LTD.

1-7, Yukigaya-otsukamachi, Ota-ku, Tokyo, 145-8501, Japan