

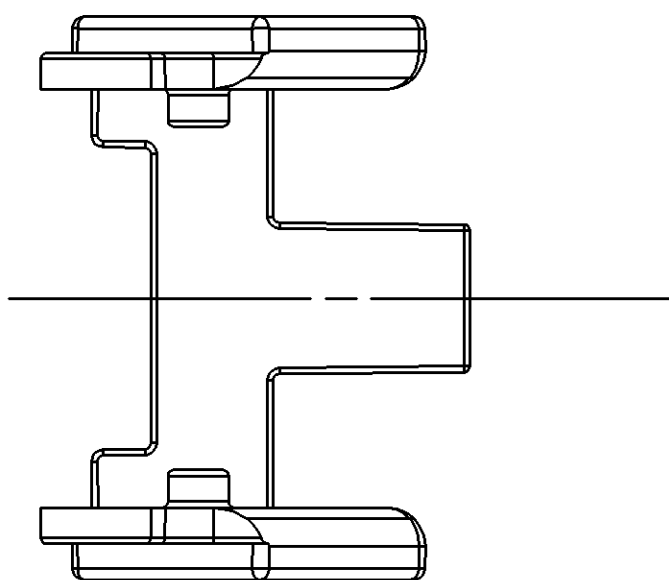
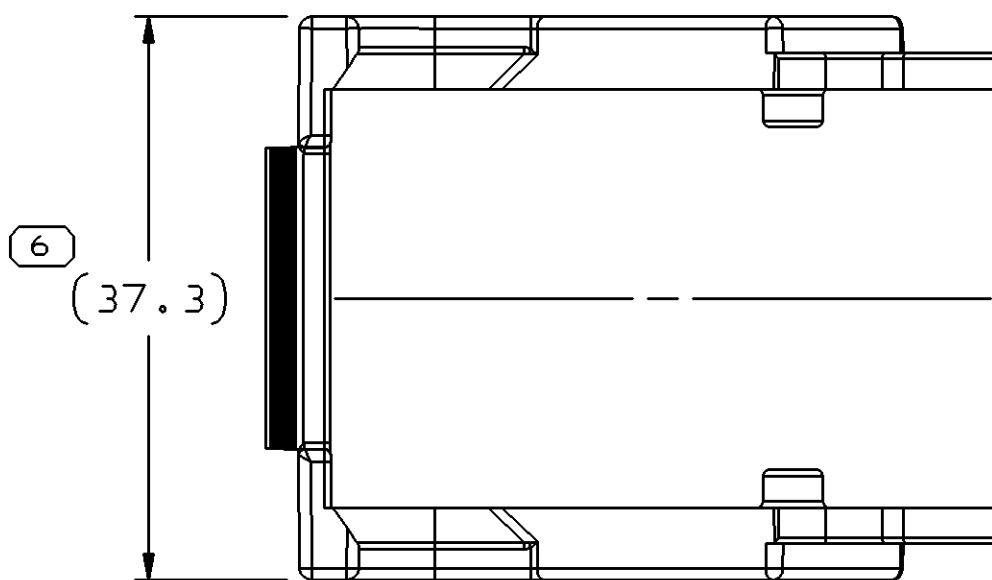
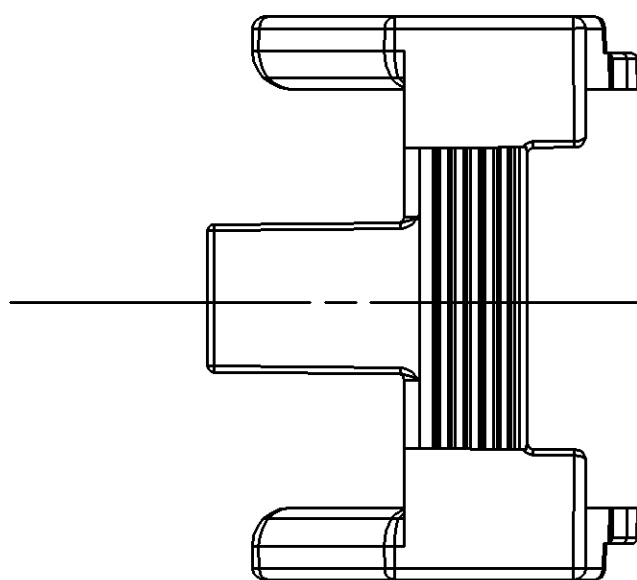
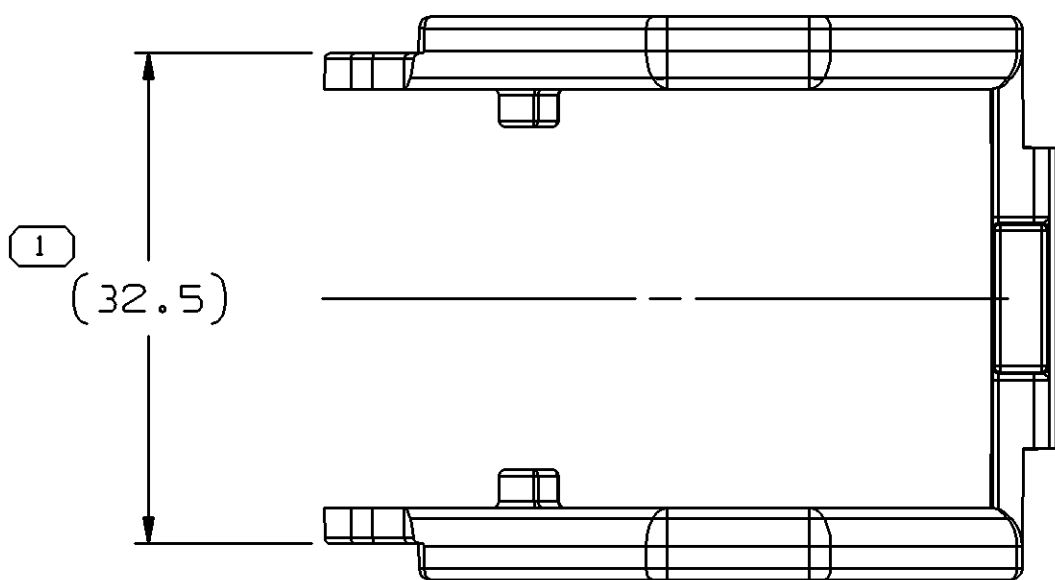
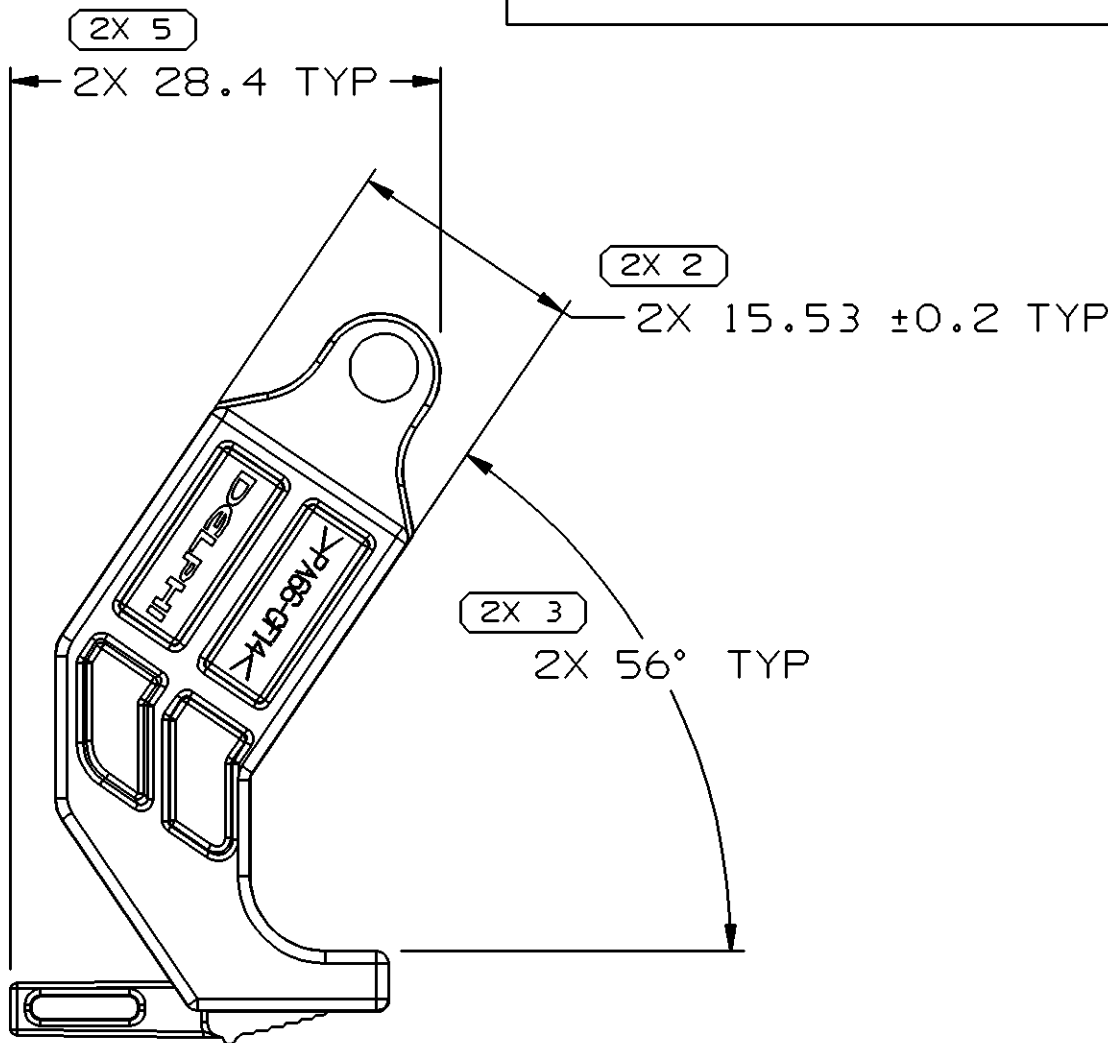


SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL  DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	12
	LAST NO. USED	7

DWG STATUS					ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
DATE	STG	REV	N/P	CHG						
120C01	R	01	-	-		WAS PE089179 AND RELEASED	209498	JMR	JMR	BG
24JL02	R	01	AA	-		2X 15.53±0.20 TYP WAS 2X 15.53 TYP, (32.5) WAS 32.5, (37.3) WAS 37.3 AND MAT'L SPEC WAS R0071581	228186	TLD	TLD	BG
12AU02	R	01	AB	-		ADDED 2X 2.4 DIM, REVISED NOTES	229200	CJP	CJP	BTG
25AP05	R	01	AC	-		UPDATED PDM ATTRIBUTES	266354	TLD	TLD	RJB

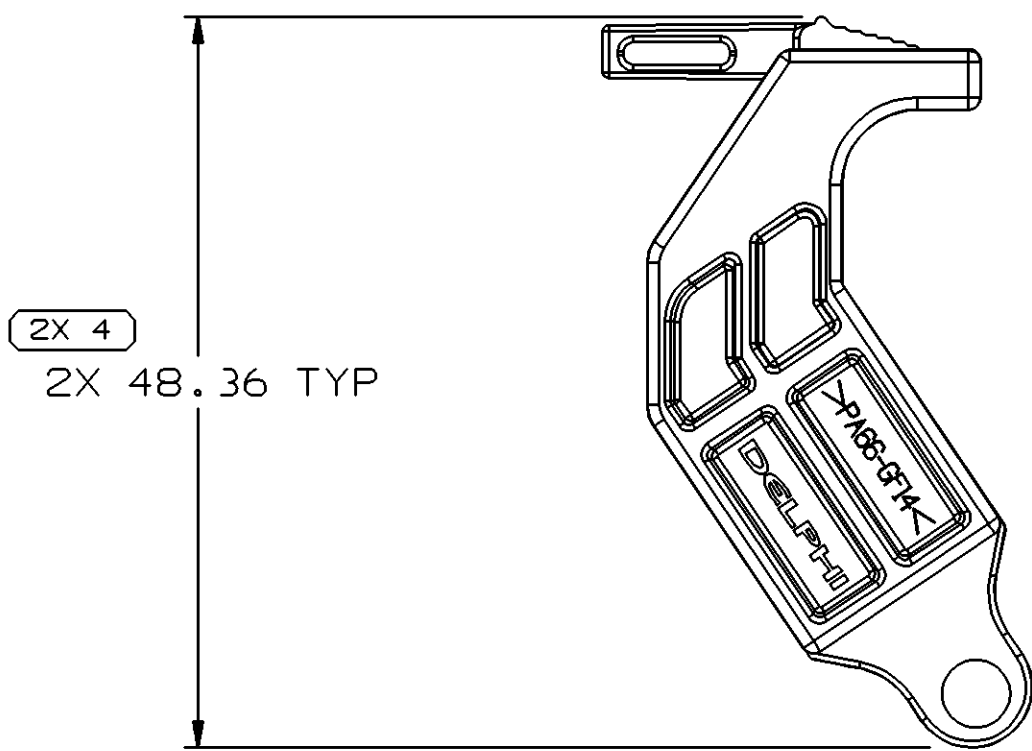

(2X 7)
2X 2.4

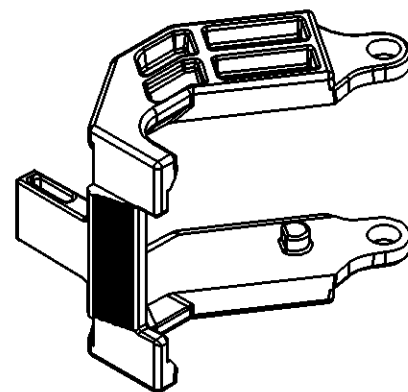

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

2. THIS PART USED IN ASSEMBLY 15393121 & 15393122.

3. MATERIAL RECYCLING CODE PER ISO 11469. (1.38)X(0.1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO RECYCLE CODE.



4. THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT:

CONNECTOR 15393123
WIREDRESS COVER 15393126

5. (1.15)X(0.1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PED" OR NO LOGO.

DIMENSIONAL RANGE (MM)										CHART E1
FROM	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300	
TO	20	30	70	100	150	200	250	300	400	
TOLERANCE UNLESS OTHERWISE SPECIFIED										
	±0.15	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8	±1	±1.2	
ANGULAR TOLERANCE ±2°										

(7)	PROCESS SENSITIVE DIMENSION
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	

DWG TYPE PART DRAWING	
STYLE	
VOLUME (CM³) 2.948	DISTR CODE D
UNLESS OTHERWISE SPECIFIED THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE GM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY RFS. RULE #11 PERFECT FORM AT MMC1 DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GAGED SEPARATELY, REGARDLESS OF DATUM REFERENCE. ALL DIMENSIONS ARE IN MILLIMETERS	
REFERENCE PE079082	
THIRD ANGLE PROJECTION 	DO NOT SCALE 

DELPHI									
DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH									
DR							DATE		
APVD1 J. RICHARDSON							120C01		
APVD2 J. RICHARDSON							120C01		
APVD3 BRIAN GEISLER							120C01		
APVD4									
APVD5									
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001									
MATERIAL M2279018 PA66 GF14 HS 1M GRA DK									
DRAWING NAME LOCK CONN LK HANDLE GRA DK									
DRAWING NUMBER 15401488									
SIZE A1	SCALE 2:1	FRAME NO 1 OF 1	SHEET NO 1 OF 1	STG R	REV 01	N/P AC			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[15401488](#)