


International  
**IR** Rectifier

**SAFEIR** Series  
70TPS..

## PHASE CONTROL SCR

	$V_T < 1.4V @ 100A$
	$I_{TSM} = 1400A$
	$V_{RRM} = 1200, 1600V$

### Description/ Features

The 70TPS... **SAFEIR** series of silicon controlled rectifiers are specifically designed for high and medium power switching and phase control applications.

Typical applications are in input rectification (soft start) or AC-Switches or high current crow-bar as well as others phase-control circuits.

These products are designed to be used with International Rectifier input diodes, switches and output rectifiers which are available in identical package outlines.

### Major Ratings and Characteristics

Characteristics	70TPS..	Units
$I_{T(AV)}$ Sinusoidal waveform	70	A
$I_{RMS}$ (*)	75	A
$V_{RRM}/V_{DRM}$ Range	1200, 1600	V
$I_{TSM}$	1400	A
$V_T @ 100A, T_J = 25^\circ C$	1.4	V
dv/dt	500	V/ $\mu s$
di/dt	150	A/ $\mu s$
$T_J$	-40 to 125	$^\circ C$

(\*) Lead current limitation

### Package Outline



Super-247

## Voltage Ratings

Part Number	$V_{RRM}/V_{DRM}$ , max. repetitive peak and off-state voltage V	$V_{RSM}$ , maximum non repetitive peak reverse voltage V	$I_{RRM}/I_{DRM}$ 125°C mA
70TPS12	1200	1300	15
70TPS16	1600	1700	


## Absolute Maximum Ratings

Parameters		70TPS..	Units	Conditions	
I <sub>T(AV)</sub>	Max. Average On-state Current	70	A	@ T <sub>C</sub> = 82° C, 180° conduction half sine wave	
I <sub>T(RMS)</sub>	Max. Continuous RMS On-state Current As AC switch	75		Lead current limitation	
I <sub>TSM</sub>	Max. Peak One Cycle Non-Repetitive Surge Current	1200	A	10ms Sine pulse, rated V <sub>RRM</sub> applied	Initial T <sub>J</sub> = T <sub>J</sub> max.
		1400		10ms Sine pulse, no voltage reapplied	
I <sup>2</sup> t	Max. I <sup>2</sup> t for Fusing	7200	A <sup>2</sup> s	10ms Sine pulse, rated V <sub>RRM</sub> applied	
		10200		10ms Sine pulse, no voltage reapplied	
I <sup>2</sup> √t	Max. I <sup>2</sup> √t for Fusing	102000	A <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reapplied	
V <sub>T(TO)1</sub>	Low Level Value of Threshold Voltage	0.916	V	T <sub>J</sub> = 125°C	
V <sub>T(TO)2</sub>	High Level Value of Threshold Voltage	1.21			
r <sub>t1</sub>	Low Level Value of On-state Slope Resistance	4.138	mΩ		
r <sub>t2</sub>	High Level Value of On-state Slope Resistance	3.43			
V <sub>TM</sub>	Max. Peak On-state Voltage	1.4	V	@ 100A, T <sub>J</sub> = 25°C	
di/dt	Max. Rate of Rise of Turned-on Current	150	A/μs	T <sub>J</sub> = 25°C	
I <sub>H</sub>	Max. Holding Current	200	mA	T <sub>J</sub> = 25°C	
I <sub>L</sub>	Max. Latching Current	400			
I <sub>RRM</sub> /	Max. Reverse and Direct	1.0	mA	T <sub>J</sub> = 25°C	V <sub>R</sub> = rated V <sub>RRM</sub> /V <sub>DRM</sub>
I <sub>DRM</sub>	Leakage Current	15		T <sub>J</sub> = 125°C	
dv/dt	Max. Rate of Rise	500	V/μs	T <sub>J</sub> = 125°C	

International  
**IR** Rectifier

**SAFEIR** Series  
70TPS..

## PHASE CONTROL SCR

	$V_T < 1.4V @ 100A$
	$I_{TSM} = 1400A$
	$V_{RRM} = 1200, 1600V$

### Description/ Features

The 70TPS... **SAFEIR** series of silicon controlled rectifiers are specifically designed for high and medium power switching and phase control applications.

Typical applications are in input rectification (soft start) or AC-Switches or high current crow-bar as well as others phase-control circuits.

These products are designed to be used with International Rectifier input diodes, switches and output rectifiers which are available in identical package outlines.

### Major Ratings and Characteristics

Characteristics	70TPS..	Units
$I_{T(AV)}$ Sinusoidal waveform	70	A
$I_{RMS}$ (*)	75	A
$V_{RRM}/V_{DRM}$ Range	1200, 1600	V
$I_{TSM}$	1400	A
$V_T @ 100A, T_J = 25^\circ C$	1.4	V
dv/dt	500	V/ $\mu s$
di/dt	150	A/ $\mu s$
$T_J$	-40 to 125	$^\circ C$

(\*) Lead current limitation

### Package Outline



Super-247

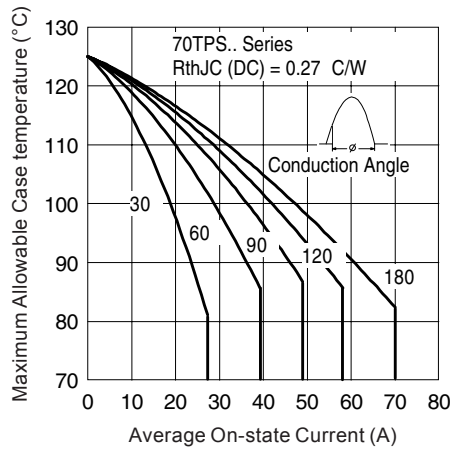


Fig. 1 - Current Rating Characteristics

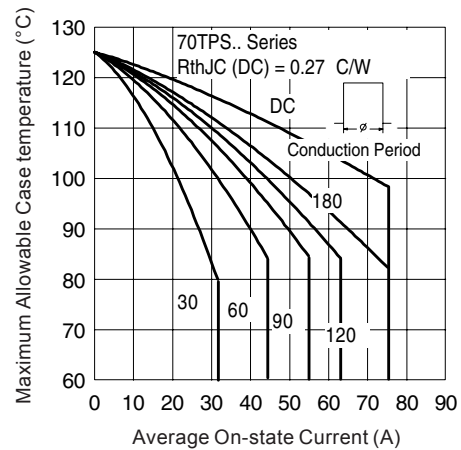


Fig. 2 - Current Rating Characteristics

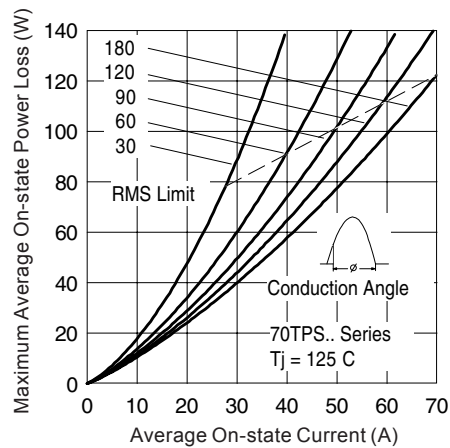


Fig. 3 - On-state Power Loss Characteristics

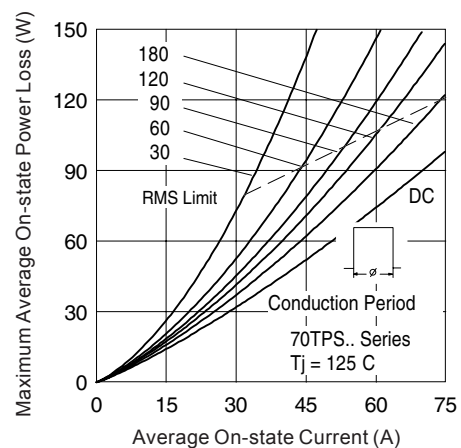


Fig. 4 - On-state Power Loss Characteristics

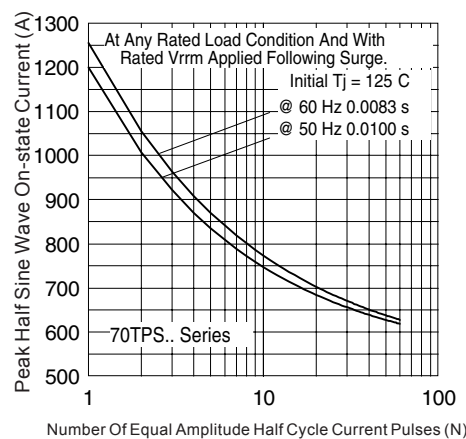


Fig. 5 - Maximum Non-Repetitive Surge Current

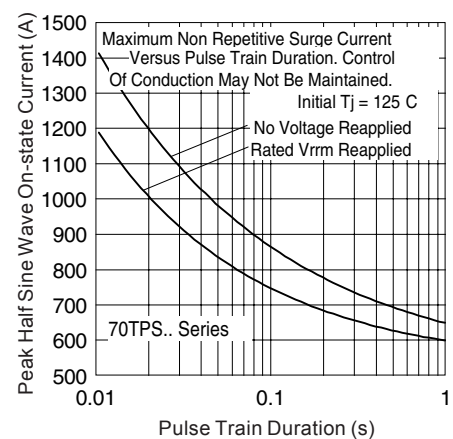


Fig. 6 - Maximum Non-Repetitive Surge Current

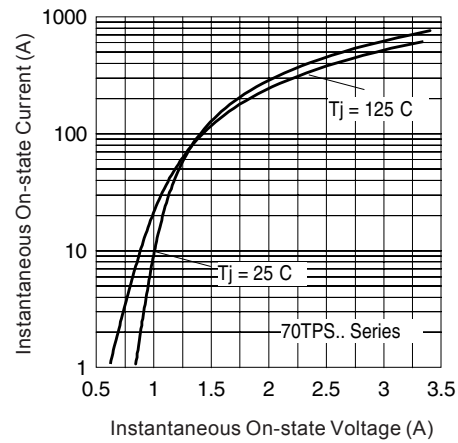


Fig. 7 - On-state Voltage Drop Characteristics

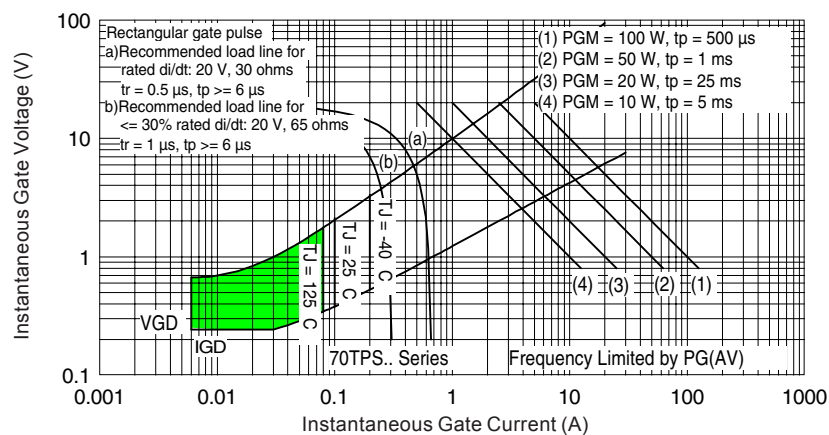


Fig. 8 - Gate Characteristics



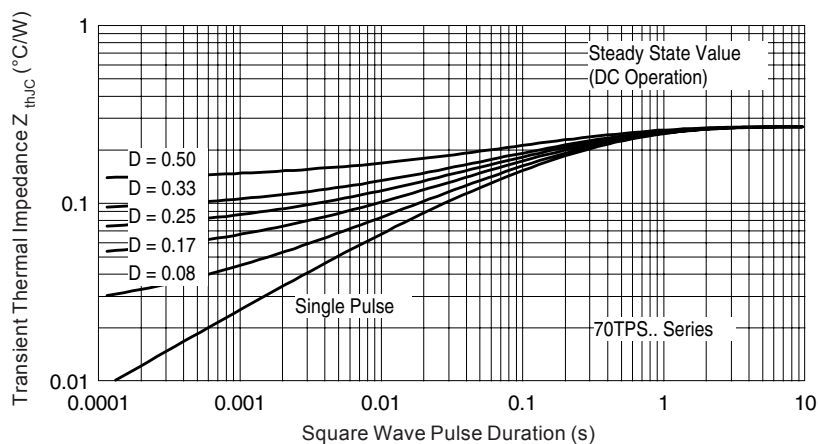


Fig. 9 - Thermal Impedance  $Z_{thJC}$  Characteristics

Outline Table

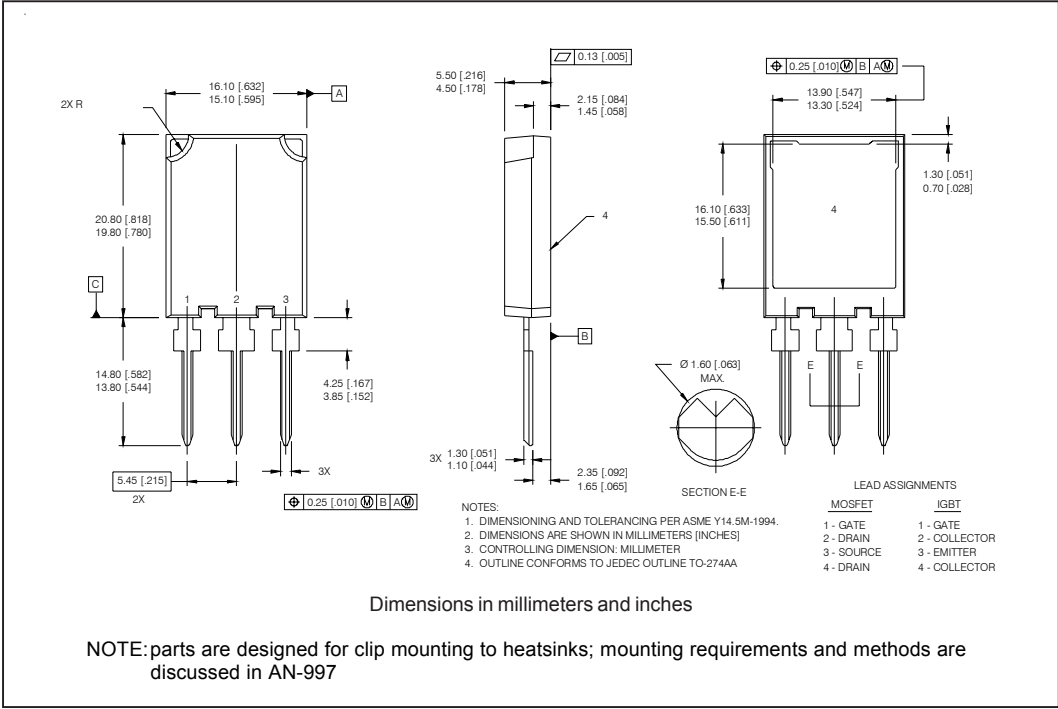

Ordering Information Table

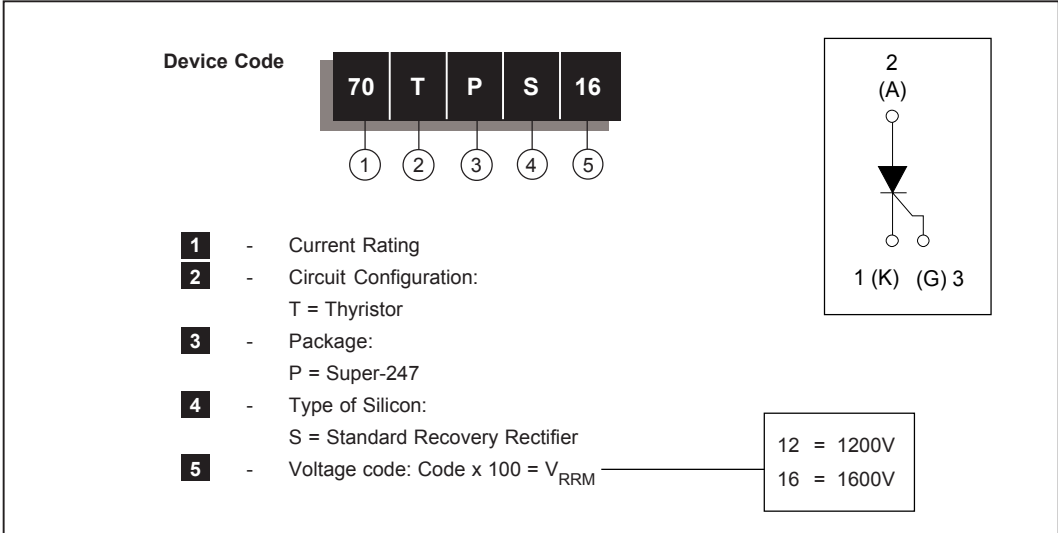

Data and specifications subject to change without notice.  
This product has been designed for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
10/04



### Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.