



15ETL06PbF
15ETL06FPPbF

Ultra-low V_F Hyperfast Rectifier for Discontinuous Mode PFC

Features

- Benchmark Ultra-low Forward Voltage Drop
- Hyperfast Recovery Time
- Low Leakage Current
- 175°C Operating Junction Temperature
- Fully Isolated package ($V_{INS} = 2500 V_{RMS}$)
- UL E78996 approved 
- Lead-Free ("PbF" suffix)

$V_F = 0.99V$ typ.
 $I_{F(AV)} = 15A$
 $V_R = 600V$

Description

State of the art, ultra-low V_F , soft-switching Hyperfast Rectifiers optimized for Discontinuous (Critical) Mode (DCM) Power Factor Correction (PFC).

The minimised conduction loss, optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

The device is also intended for use as a free wheeling diode in power supplies and other power switching applications.

Applications



AC-DC SMPS 70W-400W

e.g. Laptop & Printer AC Adaptors, Desktop PC, TV & Monitor, Games units and DVD AC-DC power supplies.

Absolute Maximum Ratings

Parameters	Max	Units
V_{RRM} Peak Repetitive Reverse Voltage	600	V
$I_{F(AV)}$ Average Rectified Forward Current @ $T_C = 154^\circ C$ @ $T_C = 120^\circ C$ (FULLPACK)	15	A
I_{FSM} Non Repetitive Peak Surge Current @ $T_J = 25^\circ C$	250	
I_{FM} Peak Repetitive Forward Current	30	
T_J, T_{STG} Operating Junction and Storage Temperatures	- 65 to 175	$^\circ C$

Case Styles

15ETL06PbF   TO-220AC	15ETL06FPPbF   TO-220 FULLPACK
---	---

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameters	Min	Typ	Max	Units	Test Conditions
V_{BR}, V_r Breakdown Voltage, Blocking Voltage	600	-	-	V	$I_R = 100\mu\text{A}$
V_F Forward Voltage	-	0.99	1.05	V	$I_F = 15\text{A}, T_J = 25^\circ\text{C}$
	-	0.85	0.92	V	$I_F = 15\text{A}, T_J = 150^\circ\text{C}$
I_R Reverse Leakage Current	-	0.1	10	μA	$V_R = V_R \text{ Rated}$
	-	15	120	μA	$T_J = 150^\circ\text{C}, V_R = V_R \text{ Rated}$
C_T Junction Capacitance	-	20	-	pF	$V_R = 600\text{V}$
L_S Series Inductance	-	8.0	-	nH	Measured lead to lead 5mm from package body

Dynamic Recovery Characteristics @ $T_C = 25^\circ\text{C}$ (unless otherwise specified)

Parameters	Min	Typ	Max	Units	Test Conditions
t_{rr} Reverse Recovery Time	-	60	120	ns	$I_F = 1\text{A}, di_F/dt = 100\text{A}/\mu\text{s}, V_R = 30\text{V}$
	-	190	270		$I_F = 15\text{A}, di_F/dt = 100\text{A}/\mu\text{s}, V_R = 30\text{V}$
	-	-	220	-	$T_J = 25^\circ\text{C}$
	-	320	-		$T_J = 125^\circ\text{C}$
I_{RRM} Peak Recovery Current	-	19	-	A	$T_J = 25^\circ\text{C}$
	-	26	-		$T_J = 125^\circ\text{C}$
Q_{rr} Reverse Recovery Charge	-	2.2	-	μC	$T_J = 25^\circ\text{C}$
	-	4.3	-		$T_J = 125^\circ\text{C}$

$I_F = 15\text{A}$
 $di_F/dt = 200\text{A}/\mu\text{s}$
 $V_R = 390\text{V}$

Thermal - Mechanical Characteristics

Parameters		Min	Typ	Max	Units
T _J	Max. Junction Temperature Range	-	-	175	°C
T _{Stg}	Max. Storage Temperature Range	- 65	-	175	
R _{thJC}	Thermal Resistance, Junction to Case	-	1.0	1.3	°C/W
	Per Leg				
	Fullpack (Per Leg)	-	3.0	3.5	
R _{thJA} ^①	Thermal Resistance, Junction to Ambient	-	-	70	
R _{thCS} ^②	Thermal Resistance, Case to Heatsink	-	0.5	-	
Weight		-	2.0	-	g
		-	0.07	-	(oz)
Mounting Torque		6.0	-	12	Kg-cm
		5.0	-	10	lbf.in

① Typical Socket Mount

② Mounting Surface, Flat, Smooth and Greased

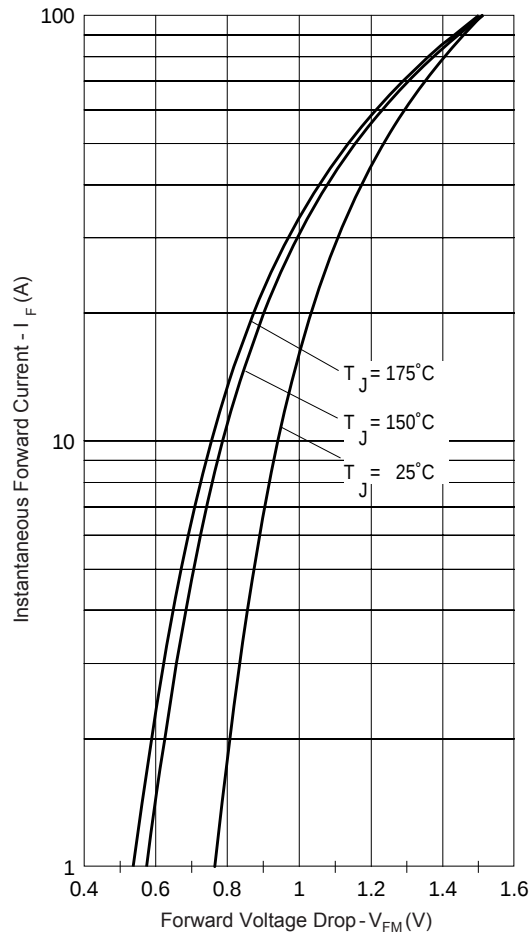


Fig. 1 - Typical Forward Voltage Drop Characteristics

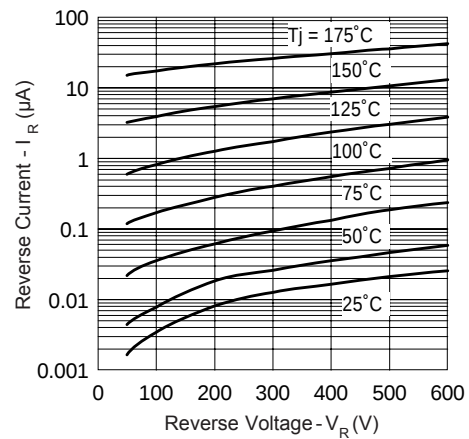


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

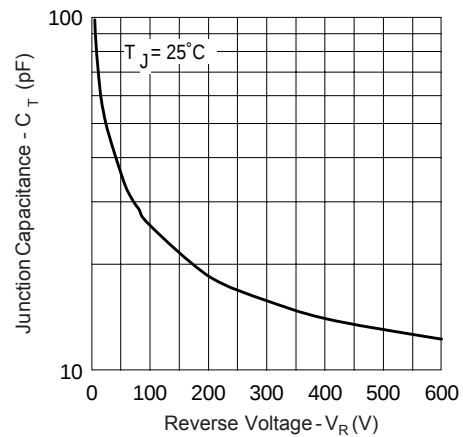


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

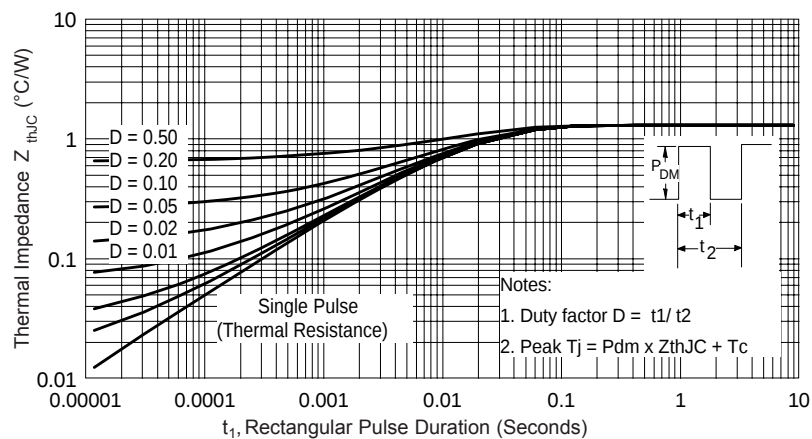


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

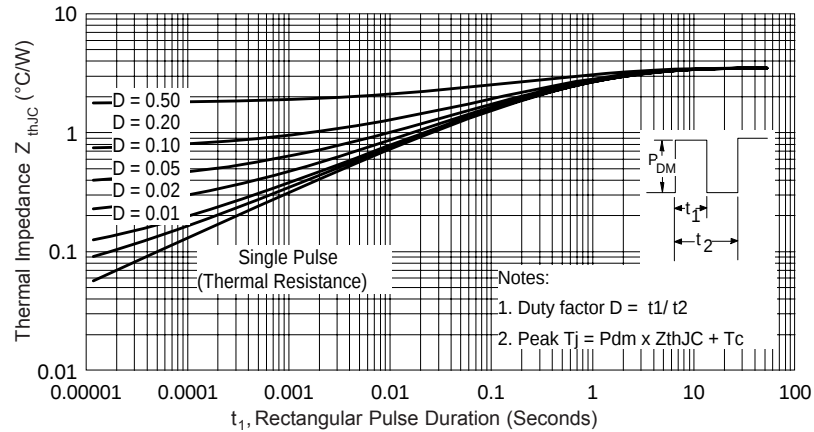
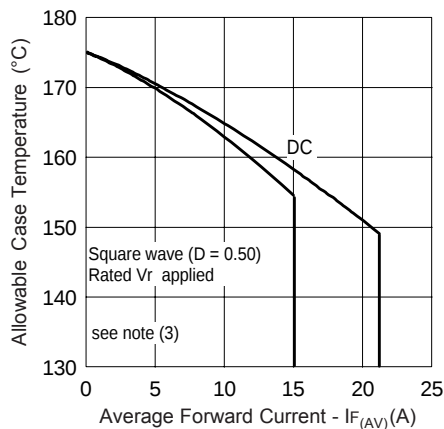
Fig. 5 - Max. Thermal Impedance Z_{thJC} Characteristics (FULLPACK)

Fig. 6 - Max. Allowable Case Temperature Vs. Average Forward Current

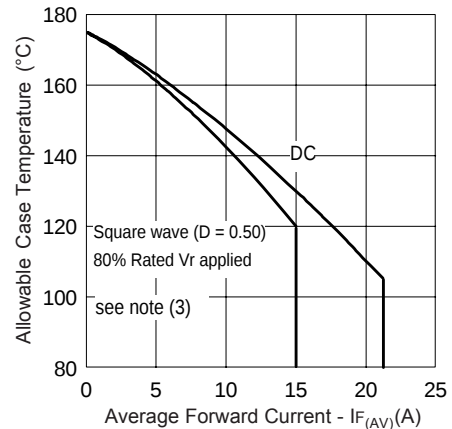


Fig. 7 - Max. Allowable Case Temperature Vs. Average Forward Current (FULLPACK)

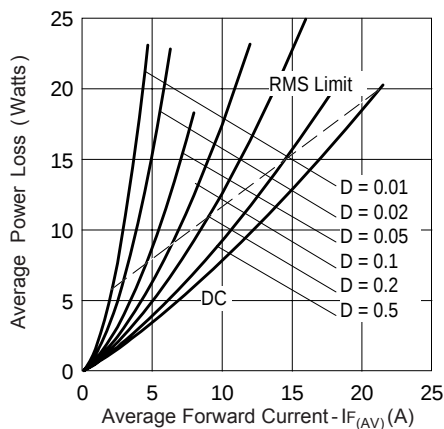


Fig. 8 - Forward Power Loss Characteristics

(3) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss =

$$I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$$

(see Fig. 8);

$$P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D);$$

$$I_R @ V_{R1} = \text{rated } V_R$$

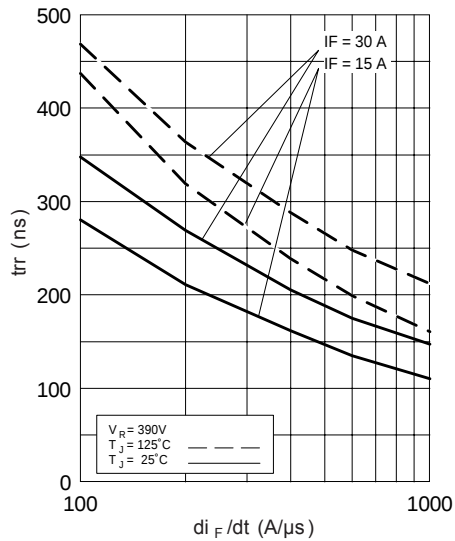


Fig. 9 - Typical Reverse Recovery vs. di_F/dt

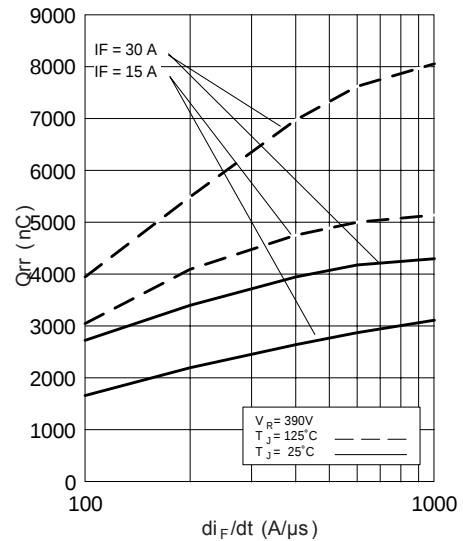


Fig. 10 - Typical Stored Charge vs. di_F/dt

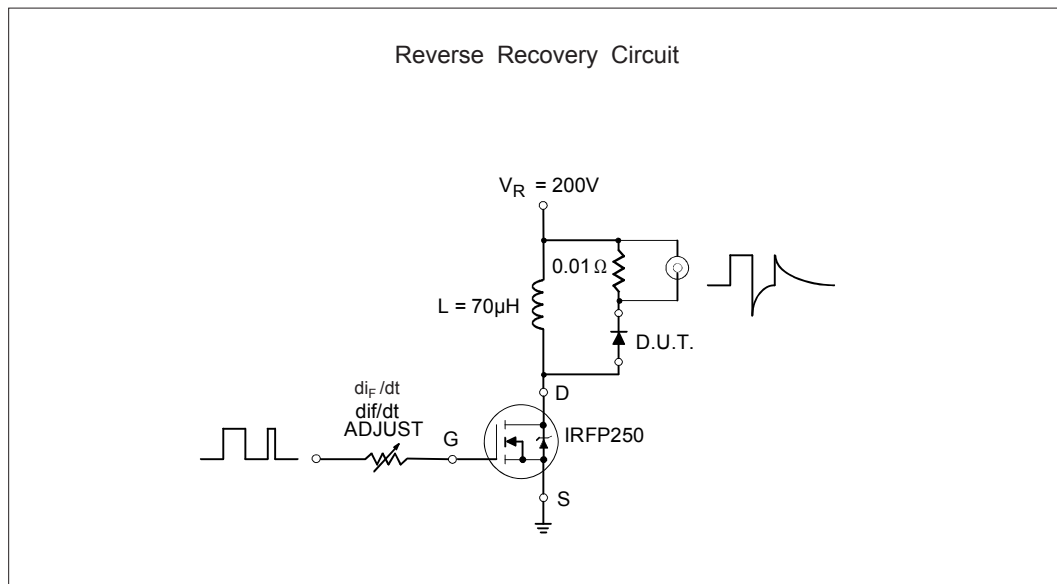


Fig. 11- Reverse Recovery Parameter Test Circuit



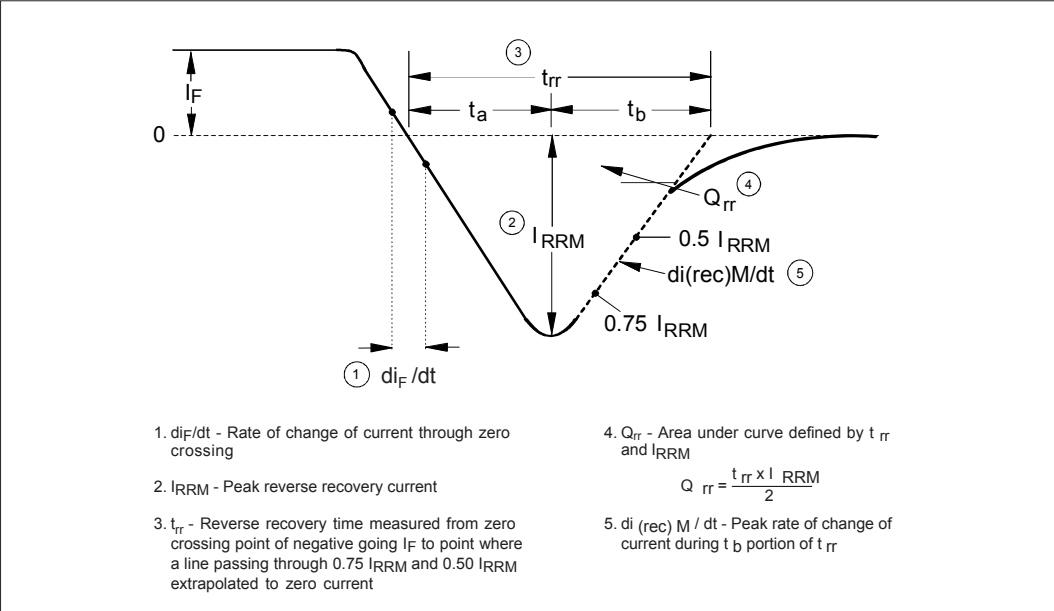


Fig. 12 - Reverse Recovery Waveform and Definitions


Outline Table

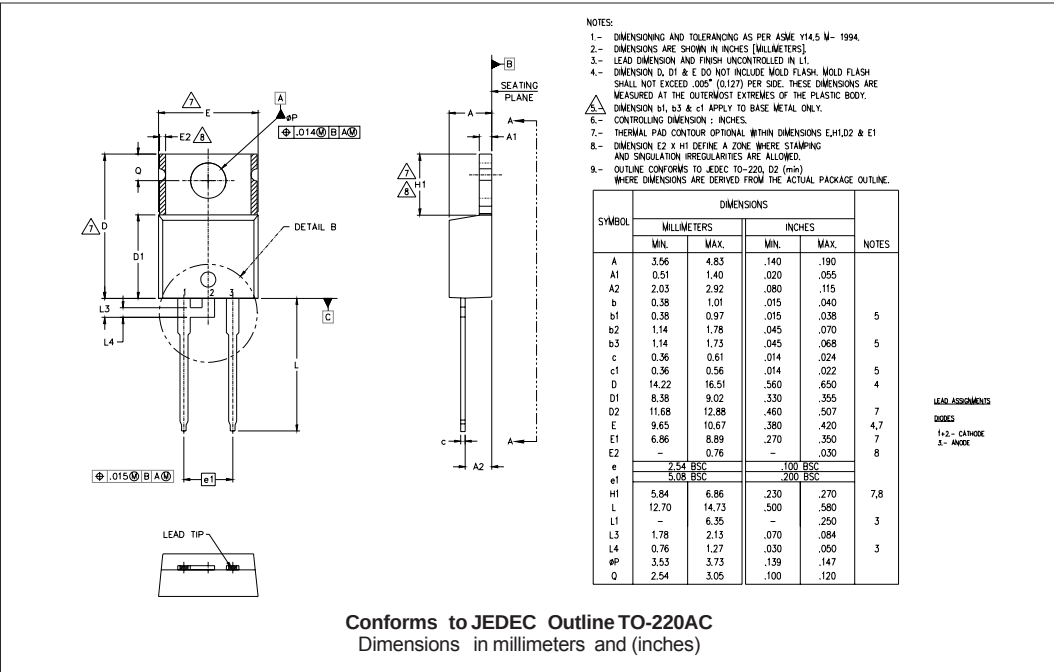

Outline Table

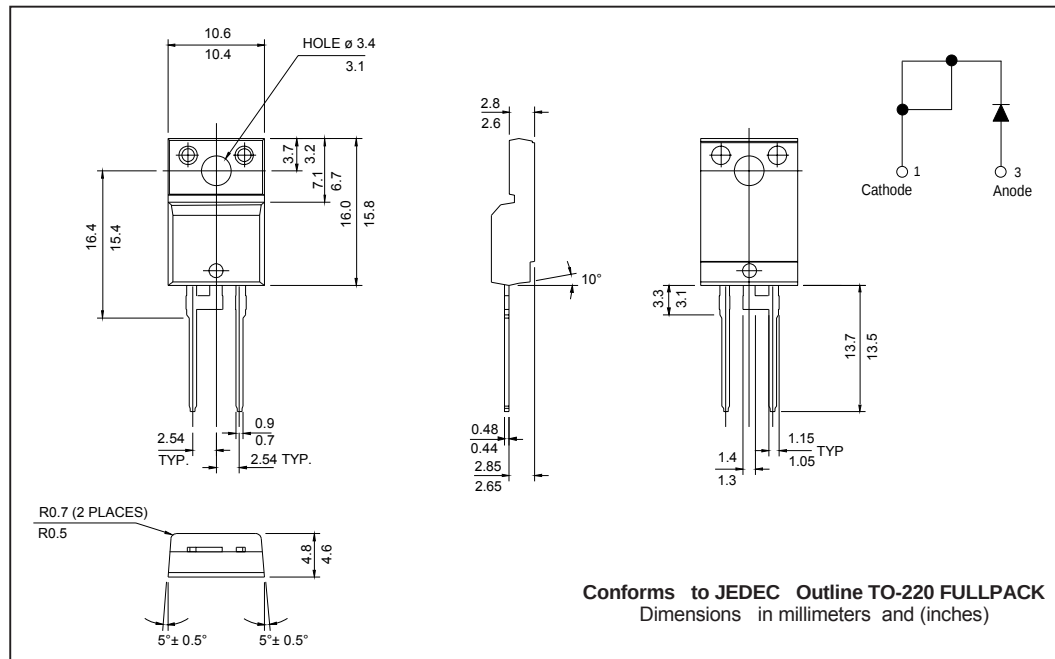

Part Marking Information (TO-220)

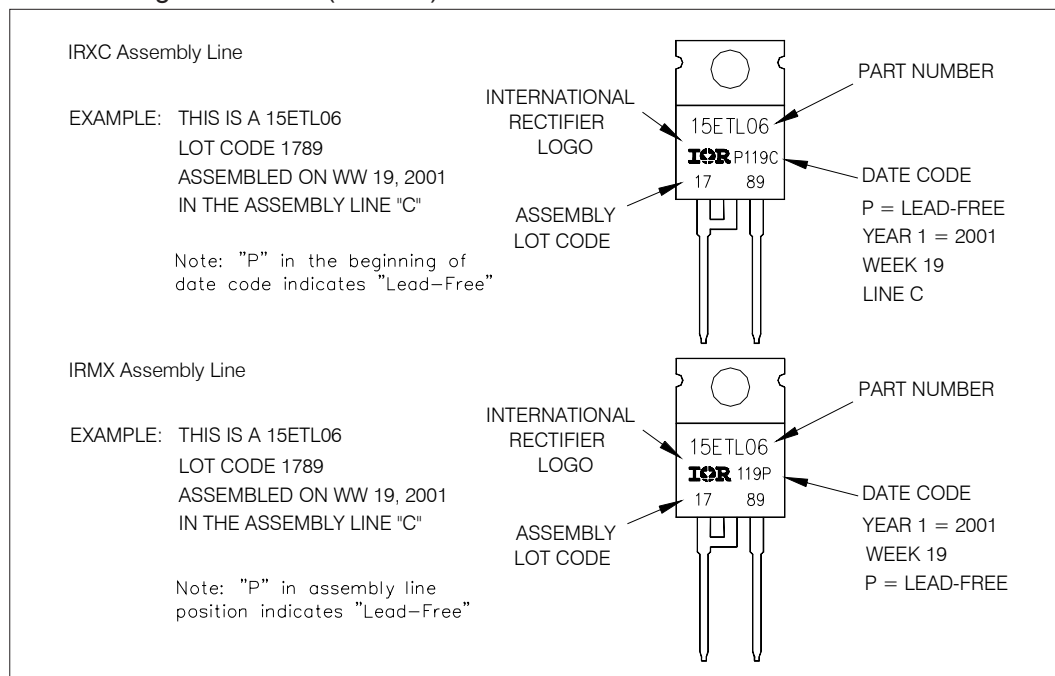

15ETL06PbF, 15ETL06FPPbF

Bulletin PD-20890 rev. A 10/06



Part Marking Information (TO-220 FULL-PAK)

EXAMPLE: THIS IS A 15ETL06FP
LOT CODE 1789
ASSEMBLED ON WW 19, 2002
IN THE ASSEMBLY LINE "C"

Note: "P" in assembly line
position indicates "Lead-Free"

Ordering Information Table

Device Code

15	E	T	L	06	FP	PbF
1	2	3	4	5	6	7

1	-	Current Rating (15 = 15A)
2	-	E = Single Diode
3	-	T = TO-220, D ² Pak
4	-	L = Ultra-low V _F HyperFast Recovery
5	-	Voltage Rating (06 = 600V)
6	-	• none = TO-220AC • FP = TO-220 FULLPACK
7	-	• none = Standard Production • PbF = Lead-Free

Tube Standard Pack Quantity: 50 pieces

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.



IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 10/06



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.