
# International Rectifier

# SAFEIR Series 30TPS16PbF

## PHASE CONTROL SCR Lead-Free ("PbF" suffix)



 $V_{T}$  < 1.3V @ 20A  $I_{TSM}$  = 300A  $V_{RRM}$ = 1600V

#### **Description/Features**


The 30TPS16PbF *SAFEIR* series of silicon controlled rectifiers are specifically designed for medium power switching and phase control applications. The glass passivation technology used has reliable operation up to 125°C junction temperature.

Typical applications are in input rectification (soft start) and these products are designed to be used with International Rectifier input diodes, switches and output rectifiers which are available in identical package outlines.


#### **Major Ratings and Characteristics**

Characteristics	Values	Units
I <sub>T(AV)</sub> Sinusoidal	20	Α
waveform		
I <sub>RMS</sub>	30	Α
V <sub>RRM</sub> /V <sub>DRM</sub>	1600	V
I <sub>TSM</sub>	300	Α
V <sub>T</sub> @ 20 A, T <sub>J</sub> = 25°C	1.3	V
dv/dt	500	V/µs
di/dt	150	A/µs
T <sub>J</sub>	-40 to 125	°C

#### Package Outline



# 30TPS16PbF SAFEIR Series





# Voltage Ratings

Part Number	V <sub>RRM</sub> /V <sub>DRM</sub> , max. repetitive peak and off-state voltage V	V <sub>RSM</sub> , maximum non repetitive peak reverse voltage	I <sub>RRM</sub> /I <sub>DRM</sub> 125°C mA
30TPS16PbF	1600	1700	10

#### Absolute Maximum Ratings

	Parameters	30TPS	Units		Conditions
I <sub>T(AV)</sub>	Max. Average On-state Current	20	Α	@ T <sub>C</sub> =95°C,1	180° conduction half sine wave
I <sub>RMS</sub>	Max. RMS On-state Current	30			
I <sub>TSM</sub>	Max. Peak One Cycle Non-Repetitive	250		10ms Sine puls	se, rated V <sub>RRM</sub> applied
	Surge Current	300		10ms Sine puls	se, no voltage reapplied
I <sup>2</sup> t	Max. I <sup>2</sup> tfor Fusing	310	A <sup>2</sup> s	10ms Sine pulse, rated V <sub>RRM</sub> applied	
		442		10ms Sine pulse, no voltage reapplied	
I <sup>2</sup> √t	Max. I <sup>2</sup> √tfor Fusing	4420	A <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reapplied	
V <sub>TM</sub>	Max. On-state Voltage Drop	1.3	V	@ 20A, T <sub>J</sub> = 25°C	
r <sub>t</sub>	On-state Slope Resistance	12	mΩ	$T_J = 125^{\circ}C$	
V <sub>T(TO</sub>	Threshold Voltage	1.0	V		
I <sub>RM</sub> /I <sub>DI</sub>	Max.Reverse and Direct	0.5	mA	T <sub>J</sub> = 25 °C	$V_R = \text{rated } V_{RRM} / V_{DRM}$
	Leakage Current	10		T <sub>J</sub> = 125 °C	R = Tated VRRM VDRM
I <sub>H</sub>	Max. Holding Current	100	mA	Anode Supply = 6V, Resistive load, Initial I <sub>T</sub> =1A	
I <sub>L</sub>	Max. Latching Current	200	mA	Anode Supply = 6V, Resistive load	
dv/dt	Max. Rate of Rise of off-state Voltage	500	V/µs		
di/dt	Max. Rate of Rise of turned-on Current	150	A/µs		

### 30TPS16PbF SAFEIR Series

Bulletin I2181 11/04

# Triggering

	Parameters	30TPS	Units	Conditions
P <sub>GM</sub>	Max. Peak Gate Power	8.0	W	
P <sub>G(A\</sub>	) Max. Average Gate Power	2.0		
+ I <sub>GM</sub>	Max. Peak Positive Gate Current	1.5	Α	
- V <sub>GN</sub>	Max. Peak Negative Gate Voltage	10	V	
I <sub>GT</sub>	Max. Required DC Gate Current	60	mA	Anode supply = 6V, resistive load, T <sub>J</sub> = - 10°C
	to Trigger	45		Anode supply = 6V, resistive load, T <sub>J</sub> = 25°C
		20		Anode supply = 6V, resistive load, T <sub>J</sub> = 125°C
V <sub>GT</sub>	Max. Required DC Gate Voltage	2.5	V	Anode supply = 6V, resistive load, T <sub>J</sub> = - 10°C
	to Trigger	2.0		Anode supply = 6V, resistive load, $T_J = 25^{\circ}C$
		1.0		Anode supply = 6V, resistive load, T <sub>J</sub> = 125°C
$V_{GD}$	Max. DC Gate Voltage not to Trigger	0.25		T <sub>J</sub> = 125°C, V <sub>DRM</sub> = rated value
I <sub>GD</sub>	Max. DC Gate Current not to Trigger	2.0	mA	T <sub>J</sub> = 125°C, V <sub>DRM</sub> = rated value

# Switching

	Parameters	30TPS	Units	Conditions
t <sub>gt</sub>	Typical Turn-on Time	0.9	μs	T <sub>J</sub> = 25°C
t <sub>rr</sub>	Typical Reverse Recovery Time	4		T <sub>J</sub> = 125°C
t <sub>q</sub>	Typical Turn-off Time	110		

# Thermal-Mechanical Specifications

	Parameters		30TPS	Units	Conditions
T <sub>J</sub>	Max. Junction Temperature	Range	- 40 to 125	°C	
T <sub>stg</sub>	Max. Storage Temperature	Range	- 40 to 125		
R <sub>thJC</sub>	Max. Thermal Resistance J	unction	0.8	°C/W	DC operation
	to Case				
R <sub>thJA</sub>	Max. Thermal Resistance J	unction	40		
	to Ambient				
R <sub>thCS</sub>	Max. Thermal Resistance C	ase	0.2		Mounting surface, smooth and greased
	to Heatsink				
wt	Approximate Weight		6 (0.21)	g (oz.)	
Т	Mounting Torque	Min.	6 (5)	Kg-cm	
		Max.	12 (10)	(lbf-in)	
	Case Style		TO-24	7AC	Jedec (Modified)
	Marking Device		30TPS16		

Bulletin I2181 11/04




Fig. 1 - Current Rating Characteristics




Fig. 3 - On-state Power Loss Characteristics




Fig. 5 - Maximum Non-Repetitive Surge Current




Fig. 2 - Current Rating Characteristics




Fig. 4 - On-state Power Loss Characteristics




Fig. 6 - Maximum Non-Repetitive Surge Current




Fig. 7 - On-state Voltage Drop Characteristics

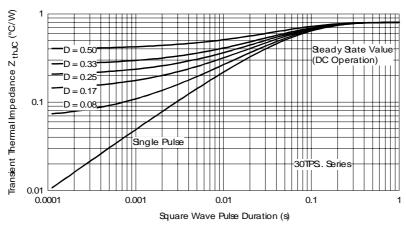


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics


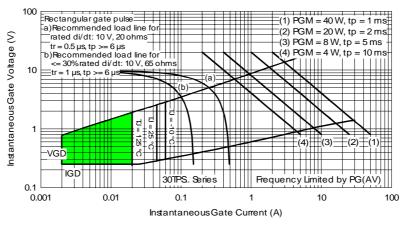



Fig. 9 - GateCharacteristics

Bulletin I2181 11/04


#### **Outline Table**

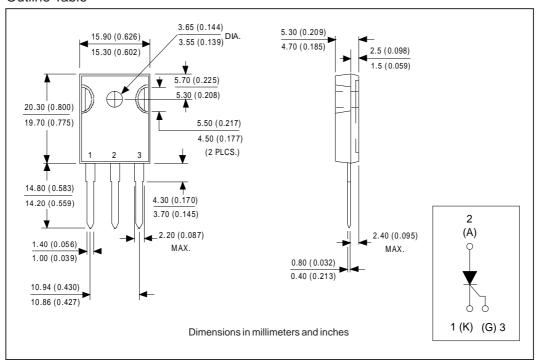

#### Marking Information

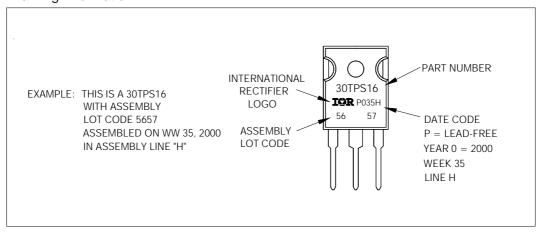

#### Ordering Information Table

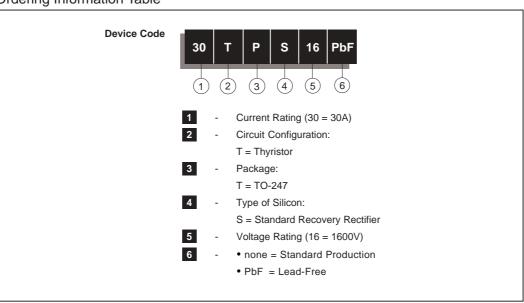

Data and specifications subject to change without notice. This product has been designed and qualified for Industrial Level and Lead-Free.

Qualification Standards can be found on IR's Web site.



IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105 TAC Fax: (310) 252-7309



Vishay

#### **Notice**

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier<sup>®</sup>, IR<sup>®</sup>, the IR logo, HEXFET<sup>®</sup>, HEXSense<sup>®</sup>, HEXDIP<sup>®</sup>, DOL<sup>®</sup>, INTERO<sup>®</sup>, and POWIRTRAIN<sup>®</sup> are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.

Document Number: 99901 www.vishay.com
Revision: 12-Mar-07 1