



ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	DC-XXX-XXX	DEEP CHANNEL PRESS-IN CARD GUIDE
2	1	CS-600 F-10.75	CONDUCTIVE INSERT

REV	DESCRIPTION	DATE	APPROVED
A	ENGINEERING RELEASE.	02/06/03	M. C.
B	ECO#388, ENGINEERING UPDATE.	05/01/03	M. C.
C	Updated Conductive Insert P/N	03/12/08	M. C.

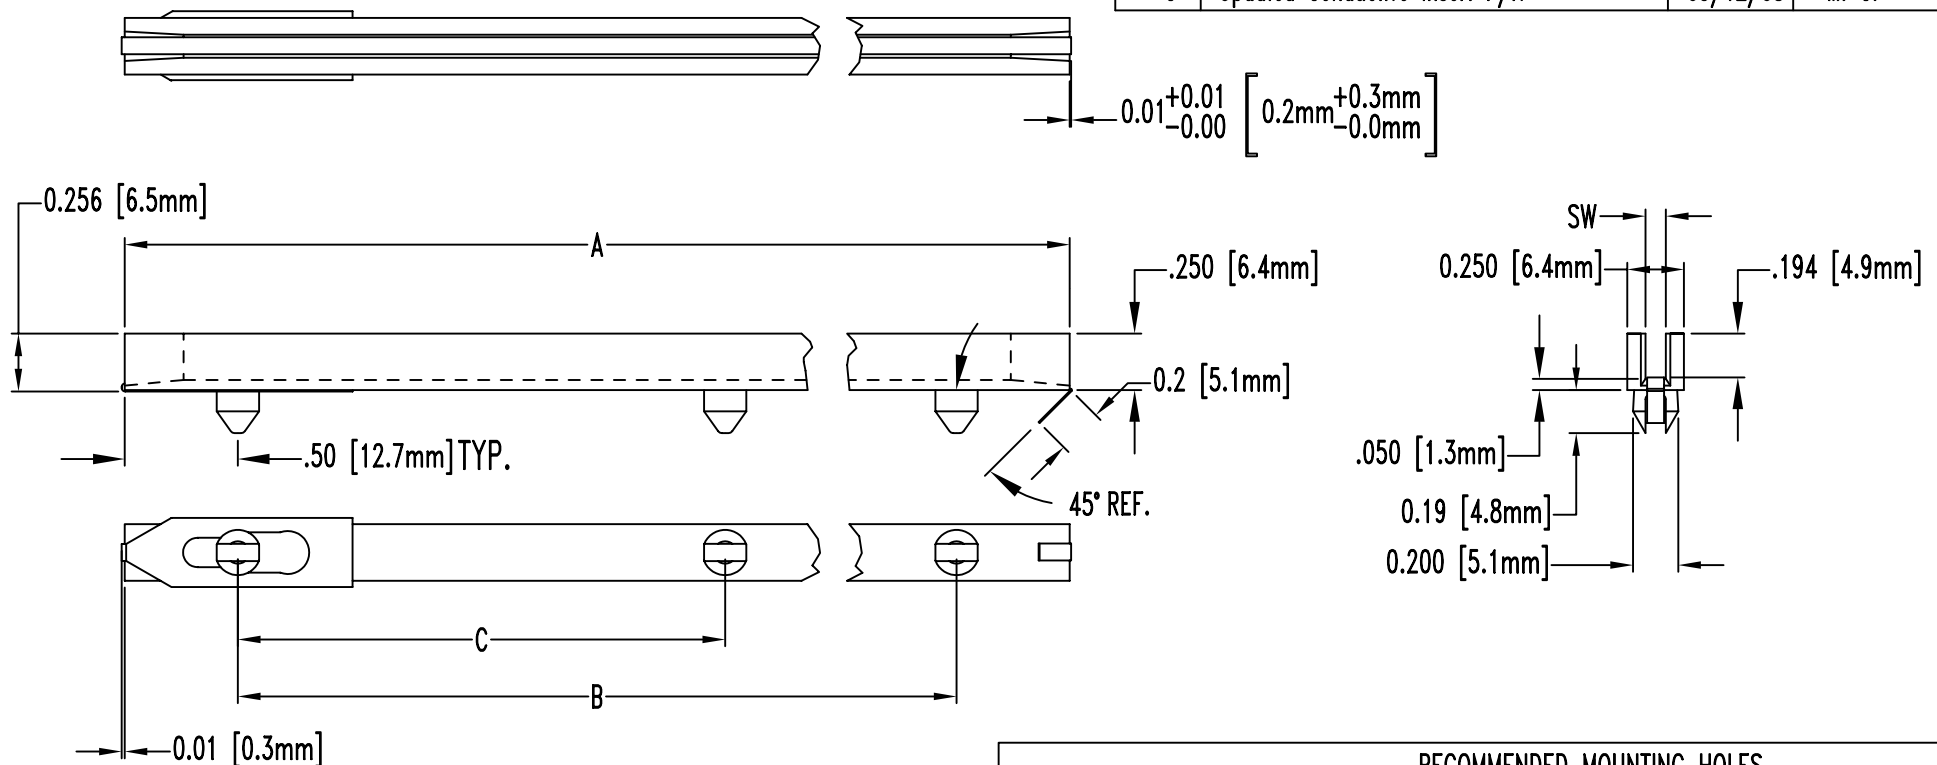

PART NO.	A ±.062 (1.6)	B ±.032 (.8)	C ±.015 (.4)	S.W. ±.005 (.1)	PCB THICKNESS	DESC DWG. NO.
DC-250 CI	2.5 (63.5)	1.5 (38.1)	--			84101-01
DC-450 CI	4.5 (114.3)	3.5 (88.9)	--			84101-02
DC-600 CI	6.0 (152.4)	5.0 (127.0)	--	.080 (2.0)	1/16 (1.6)	84101-03
DC-800 CI	8.0 (203.2)	7.0 (177.8)	3.5 (88.9)			84101-04
DC-450-102 CI	4.5 (114.3)	3.5 (88.9)	--			--
DC-600-102 CI	6.0 (152.4)	5.0 (127.0)	--	.102 (2.6)	3/32 (2.4)	--
DC-800-102 CI	8.0 (203.2)	7.0 (177.8)	3.5 (88.9)			--
DC-450-130 CI	4.5 (114.3)	3.5 (88.9)	--			84101-22
DC-600-130 CI	6.0 (152.4)	5.0 (127.0)	--	.132 (3.4)	1/8 (3.2)	84101-23
DC-800-130 CI	8.0 (203.2)	7.0 (177.8)	3.5 (88.9)			84101-24

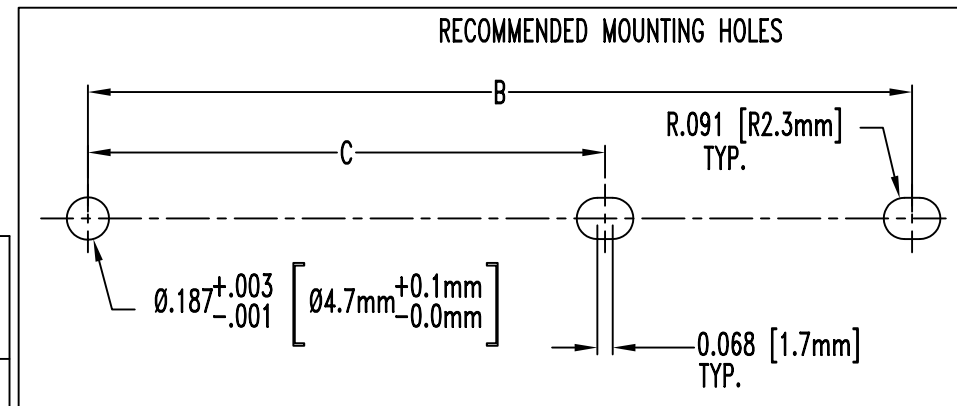

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES			
TOLERANCES			
DECIMALS		ANGULAR	
.X	± .1	X°	± 1°
.XX	± .01		
.XXX	± .005		
DESIGNER	DATE		
Michael Chen	02/06/03		
CHECKER	DATE		
D. Green	02/06/03		

Biver® 4 THOMAS, IRVINE, CA.92618 TEL: (949) 951-8808 FAX: (949) 951-3974			
PART NAME: DEEP CHANNEL PRESS-IN CARD GUIDE W/ CONDUCTIVE INSERT			
SIZE	DWG NAME	DWG NO.	REV
A		DC-XXX-XXX-CI	C
SCALE 1=1	CAGE CODE 32559	SHEET 1 OF 1	