Product data sheet Characteristics

XACB04

empty pendant control station XAC-B - 4 vertical openings



Main Range of product Harmony XAC Product or component Pendant control station Control station name XACB Control station type Double insulated Enclosure material Glass reinforced polyester Electrical circuit type Control circuit Power circuit Enclosure type Empty enclosure Number of cut-out 4 cut-outs

eter: 10...22 mm

Without

Without

Rubber sleeve with stepped entry, cable outer diam-

Complementary

Control station colour	Yellow	
Vertical operator cut-out centre	40 mm	
Mechanical durability	1000000 cycles	
Product weight	1 kg	

Cutout in base of enclo-

Cable entry

Guard rail


sure

Environment

Environment					
Standards	CSA C22-2 No 14				
	EN/IEC 60947-5-1				
	UL 508				
Product certifications	CSA type 4				
Protective treatment	TH				
Ambient air temperature for operation	-2570 °C				
Ambient air temperature for storage	-4070 °C				
Vibration resistance	15 gn (f = 10500 Hz) conforming to IEC 60068-2-6				
Shock resistance	100 gn conforming to IEC 60068-2-27				
Class of protection against electric shock	Class II conforming to IEC 61140				
IP degree of protection	IP65 conforming to IEC 60529				
IK degree of protection	IK08 conforming to EN 50102				
	· · · · · · · · · · · · · · · · · · ·				

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

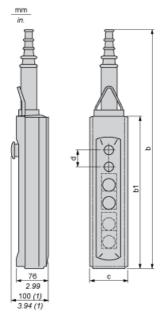

(1) With mushroom head operator


Dimensions in mm

Number of cut-outs	2	4	6	8	12
b	409	499	589	679	679
b1	220	310	400	490	490
С	98	98	98	98	98
d	40	40	40	40	30

Dimensions in in.


Number of cut-outs	2	4	6	8	12
b	16.10	19.64	23.19	26.73	26.73
b1	8.66	12.20	15.75	19.29	19.29
С	3.86	3.86	3.86	3.86	3.86
d	1.57	1.57	1.57	1.57	1.18

Protective cable sleeves




Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately



Control of 2-Speed Reversing Motor


With XESD1281 contact block, to be ordered separately




KM High speed contactor

Control of Single-Speed Reversing Motor 2-Phase Switching

With XESD1191 contact block, to be ordered separately

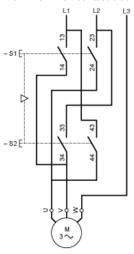


Combined with 3-pole isolating block XACS399 or XACS3991, shown in the unoperated position (pendant station "supplied"), fitted with key release trigger action latching Emergency stop operator.

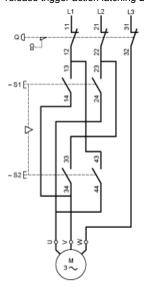


Control of 2-Speed Reversing Motor 2-Phase Switching

With XESD1291 contact block, to be ordered separately

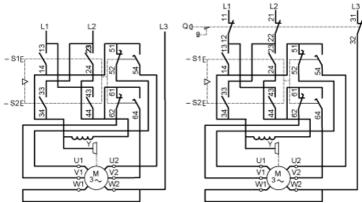

Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2201 contact block, to be ordered separately



Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2241 contact block, to be ordered separately

