

Interactive Catalog Supplements Catalog PDFs

If you need detailed product information, or help choosing the right product for your application, see our **Interactive Catalog**. Use the **Interactive Catalog** to access the most complete and up-to-date information available.

The **Interactive Catalog** provides an extensive collection of product specifications, application data, and technical literature that can be searched based on criteria you select.

This PDF catalog information was published in November 2000.



Sensing and Control
**Interactive
Catalog...**

**Click this icon to try
the Interactive Catalog.**

Sensing and Control

Honeywell Inc.

11 West Spring Street

Freeport, IL 61032

www.honeywell.com/sensing

Manual Switches

Miniature Toggle Switches

TW Series



11TW Standard toggle lever
15/32" bushing



1TW Standard unsealed toggle lever
1/4" bushing



12TW Pull-to-unlock toggle lever
15/32" bushing



2TW101 Standard sealed toggle lever
1/4" bushing

- Qualified to MIL-S-83781
- Save space and weight
- SPDT and DPDT circuitry
- Choice of 1/4" or 15/32" bushings
- 15/32" bushing has lever seal
- Pull-to-unlock option on 15/32" bushing
- UL Recognized
- Temperature range: -85°F to +160°F (-65°C to +71°C)
- Sealed bushing versions

Molded-in terminals are plated for soldering. There is positive return on momentary versions. All switches come with a lockwasher, a keying washer, and two hexnuts. Special "on-on-on" circuitries, similar to those shown for TL, are also available for TW.

ELECTRICAL RATING

Volts	Amperes		
	Resistive	Inductive	Lamp
30 VDC	5	2	1
115 VAC	5	2	1
UL Code 117	5 amps @ 125 VAC		

TERMINAL CIRCUIT IDENTIFICATIONS

Terminal identifications are referred to in the Ordering Charts to indicate which circuits are made in each toggle position


(i.e., "1-2" reference indicates circuit closure through terminals 1 and 2).

CIRCUITRY



1¹ Single Pole Double Throw



2¹ Two Single Pole Double Throw Circuits



¹Refer to order guides.



Manual Switches

Miniature Toggle Switches

TW Series

2-POSITION ORDER GUIDES

Switches with 15/32" Bushings

No. Poles	Circuits Made with Toggle at:		Sealed Standard Toggle		Sealed Pull-to-Unlock Toggle**	
	Keyway Position	Opposite Keyway	Catalog Listing	Military No.	Add Suffix (next page) to Listing	Military No.**
1 1 1	OFF 2-1 ON 2-1 ON*	2-3 ON 2-3 ON 2-3 ON	11TW1-2 11TW1-3 11TW1-8	MS27718-22-1 MS27718-23-1 MS27718-26-1	D, F, G D, F, G F	MS27720-22-1 MS27720-23-1 MS27720-26-1
2 2 2	OFF 2-1 & 5-4 ON 2-1 & 5-4 ON*	2-3 & 5-6 ON 2-3 & 5-6 ON 2-3 & 5-6 ON	12TW1-2 12TW1-3 12TW1-8	MS27719-22-1 MS27719-23-1 MS27719-26-1	D, F, G D, F, G F	MS27721-22-1 MS27721-23-1 MS27721-26-1

* These positions are momentary. All others are maintained.
** Also add appropriate suffix letter to the Military Number.

Switches with 1/4" Bushings

No. Poles	Circuits Made with Toggle at:		Unsealed Standard Toggle		Sealed Standard Toggle
	Keyway Position	Opposite Keyway	Catalog Listing	Military No.	Catalog Listing
1 1 1	OFF 2-1 ON 2-1 ON*	2-3 ON 2-3 ON 2-3 ON	1TW1-2 1TW1-3 1TW1-8	MS27716-22-1 MS27716-23-1 MS27716-26-1	1TW101-2 1TW101-3 1TW101-8
2 2 2	OFF 2-1 & 5-4 ON 2-1 & 5-4 ON*	2-3 & 5-6 ON 2-3 & 5-6 ON 2-3 & 5-6 ON	2TW1-2 2TW1-3 2TW1-8	MS27717-22-1 MS27717-23-1 MS27717-26-1	2TW101-2 2TW101-3 2TW101-8

* These positions are momentary. All others are maintained.

3-POSITION ORDER GUIDES

Switches with 15/32" Bushings

No. Poles	Circuits Made with Toggle at:			Sealed Standard Toggle		Sealed Pull-to-Unlock Toggle	
	Keyway Position	Center Position	Opposite Keyway	Catalog Listing	Military No.	Add Suffix (next page) to Listing	Military No.**
1 1 1	2-1 ON 2-1 ON* 2-1 ON*	OFF OFF OFF	2-3 ON 2-3 ON 2-3 ON*	11TW1-1 11TW1-5 11TW1-7	MS27718-21-1 MS27718-31-1 MS27718-27-1	ALL E, F, K, L, M, N E, L, N	MS27720-21-1 MS27720-31-1 MS27720-27-1
2 2 2	2-1 & 5-4 ON 2-1 & 5-4 ON* 2-1 & 5-4 ON*	OFF OFF OFF	2-3 & 5-6 ON 2-3 & 5-6 ON 2-3 & 5-6 ON*	12TW1-1 12TW1-5 12TW1-7	MS27719-21-1 MS27719-31-1 MS27719-27-1	ALL E, F, K, L, M, N E, L, N	MS27721-21-1 MS27721-31-1 MS27721-27-1

* These positions only are momentary. All others are maintained.
** Also add appropriate suffix letter to the Military Number.

Switches with 1/4" Bushings

No. Poles	Circuits Made with Toggle at:			Unsealed Standard Toggle		Sealed Standard Toggle
	Keyway Position	Center Position	Opposite Keyway	Catalog	Military No.	Catalog Listing
1 1 1	2-1 ON 2-1 ON* 2-1 ON*	OFF OFF OFF	2-3 ON 2-3 ON 2-3 ON*	1TW1-1 1TW1-5 1TW1-7	MS27716-21-1 MS27716-31-1 MS27716-27-1	1TW101-1 1TW101-5 1TW101-7
2 2 2	2-1 & 5-4 ON 2-1 & 5-4 ON* 2-1 & 5-4 ON*	OFF OFF OFF	2-3 & 5-6 ON 2-3 & 5-6 ON 2-3 & 5-6 ON*	2TW1-1 2TW1-5 2TW1-7	MS27717-21-1 MS27717-31-1 MS27717-27-1	2TW101-1 2TW101-5 2TW101-7

* These positions are momentary. All others are maintained.

Toggle/Rockers

Manual Switches

Miniature Toggle Switches

TW Series

LOCKING CONFIGURATION SUFFIX

When ordering pull-to-unlock toggle listings, add the suffix letter shown in this chart to the standard toggle catalog listing and the Military Approval number.

A  Locked In Three Positions	B  Locked In Center and Extreme Position (Keyway Side)	D  Locked Out Of Center Position	E  Locked In Center Position	F  Locked In Extreme Position (Opposite Keyway)	G  Locked In Extreme Position (Keyway Side)	H  Locked Out Of Center And Extreme Position (Keyway Side)
J  Locked Out Of Center And Extreme Position (Opposite Keyway)	K  Locked In Center And Extreme Position (Opposite Keyway)	L  Locked Out Of Extreme Position (Keyway Side)	M  Locked Out Of And Into Extreme Position (Opposite Keyway)	N  Locked Out Of Extreme Position (Opposite Keyway)	P  Locked Out Of And Into Extreme Position (Keyway Side)	



- WITH IWTS TERMINATION**
- $\frac{15}{32}$ " bushing has lever seal
 - One or two pole circuitry
 - Accepts #20 wire using M39029/1-101 contact pins
 - Connections resist shock, vibration, and high pulling force

2 - POSITION ORDER GUIDE — IWTS TERMINATION

No. Poles	Circuits Made with Toggle at:		Standard Toggle	Pull-to-Unlock Toggle
	Keyway Position	Opposite Keyway	Catalog Listing	Add Suffix to Standard Listing
1 1	2-1 ON 2-1 ON*	2-3 On 2-3 ON	111TW1-3 111TW1-8	D, F, G F
2 2	2-1 & 5-4 ON 2-1 & 5-4 ON*	2-3 & 5-6 ON 2-3 & 5-6 ON	112TW1-3 112TW1-8	D, F, G F


3 - POSITION ORDER GUIDE — IWTS TERMINATION

No. Poles	Circuits Made with Toggle at:			Standard Toggle	Pull-to-Unlock Toggle
	Keyway Position	Center Position	Opposite Keyway	Catalog Listing	Add Suffix to Standard Listing
1 1 1	2-1 ON 2-1 ON* 2-1 ON*	OFF OFF OFF	2-3 ON 2-3 ON 2-3 ON*	111TW1-1 111TW1-5 111TW1-7	ALL E, F, K, L, M, N E, L, N
2 2 2	2-1 & 5-4 ON 2-1 & 5-4 ON* 2-1 & 5-4 ON*	OFF OFF OFF	2-3 & 5-6 ON 2-3 & 5-6 ON 2-3 & 5-6 ON*	112TW1-1 112TW1-5 112TW1-7	ALL E, F, K, L, M, N E, L, N

* These positions only are momentary. All others are maintained.

Manual Switches
Miniature Toggle Switches

TW Series

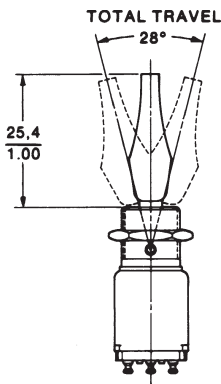

- WITH COLORED TAB LEVERS
• Available in seven colors
• Affords attractive front-of-panel appearance for graphic display and functional identify
• Levers made to withstand temperatures up to 160°F (71°C)
• Switches furnished with decorative knurled nut, a lockwasher, a keying washer, and a hex nut
• 15/32" bushing has lever seal
• Solder terminals (available with IWTS termination)

ORDER GUIDE

To order, combine the basic (function) listing from Table 1 with the desired lever color suffix from Table 2. Colored tab levers are not available with 1/4 in. bushing.

TABLE 1 — TOGGLE POSITION AND CONTACT ARRANGEMENT

Table with 6 columns: Positions, No. Poles, Keyway Position, Center Position, Opposite Keyway, and Basic Listing. It details various switch configurations and their corresponding catalog numbers.

* These positions only are momentary. All others are maintained.

TABLE 2 — TAB LEVER COLORS

Table with 8 columns: Tab Lever Color, White, Black, Blue, Red, Green, Orange, and Light Gray. It lists color suffixes A001 through A007.

TW SWITCHES WITH SPECIAL CIRCUITRIES

All 2-pole 3-position TW switches are available with special "on-on-on" -10, -50, -70 circuitry options as shown below.

Table with 7 columns: 2-Pole 3-Position Switches, Sealed Standard Toggle, Unsealed Std. Toggle, Sealed Tab Lever, and their respective catalog listings for different circuit options.

* These positions are momentary. All others are maintained.

Toggle/Rockers

TW Series

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[111TW1-3G](#) [12TW1-12M](#) [12TW1-5N](#) [12TW29-1](#) [12TW438-10](#) [12TW49-3D](#) [12TW586-3](#) [12TW819-7-A002](#)
[12TW870-7](#) [12TW870-8](#) [12TW887-12M](#) [12TW887-3D](#) [12TW105-7](#) [12TW8-10P](#) [12TW8-1L](#) [12TW19-5-A002](#)