



#### Features:

- Universal AC input/Full range
- Low leakage current <100µA
- Protections: Short circuit / Overload / Over voltage
- Free air convection for rated power and 23.5CFM forced air convection for peak load
- ANSI/AAMI ES60601-1/IEC60601-1/EN60601-1 medical safety approved
- No load power consumption<0.75W
- Fixed switching frequency at 65KHz




## **SPECIFICATION**

MODEL		RPS-75-3.3	RPS-75-5	RPS-75-12	RPS-75-15	RPS-75-24	RPS-75-36	RPS-75-48
	DC VOLTAGE	3.3V	5V	12V	15V	24V	36V	48V
	RATED CURRENT	15A	14A	6.3A	5A	3.2A	2.1A	1.6A
	CURRENT RANGE	0 ~ 20A	0 ~ 18.7A	0 ~ 8.3A	0 ~ 6.7A	0 ~ 4.2A	0 ~ 2.8A	0 ~ 2.1A
	RATED POWER	49.5W	70W	75.6W	75W	76.8W	75.6W	76.8W
	PEAK LOAD (23.5CFM)	66W	93.5W	99.6W	100.5W	100.8W	100.8W	100.8W
OUTDUT	RIPPLE & NOISE (max.) Note.2	80mVp-p	80mVp-p	120mVp-p	150mVp-p	240mVp-p	300mVp-p	300mVp-p
OUTPUT	VOLTAGE ADJ. RANGE	2.9 ~ 3.6V	4.75 ~ 5.5V	11.4 ~ 13.2V	13.5 ~ 16.5V	22.8 ~ 27.6V	34.2 ~ 39.6V	45.6 ~ 52.8V
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME	500ms, 30ms/23	0VAC 500ms	, 30ms/115VAC at	full load	'		'
	HOLD UP TIME (Typ.)	80ms/230VAC 20ms/115VAC at full load						
	VOLTAGE RANGE	90 ~ 264VAC 127 ~370VDC						
	FREQUENCY RANGE	47 ~ 63Hz						
INPUT	EFFICIENCY(Typ.)	73%	78%	82%	83%	85%	86%	86%
INFOI	AC CURRENT (Typ.)	1.5A/115VAC 1A/230VAC						
	INRUSH CURRENT (Typ.)	COLD START 25A/115VAC 50A/230VAC						
	LEAKAGE CURRENT Note.7							
	OVERLOAD	140 ~ 180% rated output power						
PROTECTION	OVERLOAD	Protection type :	Hiccup mode, reco	overs automaticall	y after fault conditio	n is removed.		
PROTECTION	OVER VOLTAGE	3.8 ~ 4.46V	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	27.6 ~ 32.4V	41.4 ~ 48.6V	55.2 ~ 64.8V
	OVER VOLIAGE	Protection type :	Shut down o/p vol	tage, re-power to r	ecover			
	WORKING TEMP.	-20 ~ +70°C (Refer to "Derating Curve")						
	WORKING HUMIDITY	20 ~ 90% RH non-condensing						
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.03%/°C (0~45°C)						
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes						
	SAFETY STANDARDS	ANSI/AAMI ES60601-1, TUV EN60601-1, IEC60601-1 approved						
SAFETY &	WITHSTAND VOLTAGE I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC							
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH						
(Note 4) EMC EMISSION Compliance to EN55011 (CISPR11), EN55022 (CISPR22) Class B, EN			R22) Class B, EN61	1000-3-2,-3				
EMC IMMUNITY Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61000				1-1-2, EN61000-6-2, E	N61204-3, heavy indu	ıstry level, EN61204-3	medical level, criteria A	
	MTBF	446.8K hrs min.	MIL-HDBK-217	F (25°C)				
OTHERS	DIMENSION	127*76.2*31mm	(L*W*H)					
	PACKING	0.26Kg; 63pcs/1	6.3Kg/1.35CUFT					
NOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</li> <li>Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.</li> <li>Heat Sink HS1,HS2,HS3 can not be shorted.</li> <li>Touch current was measured from primary input to DC output.</li> </ol>							



## ■ Mechanical Specification

Unit:mm

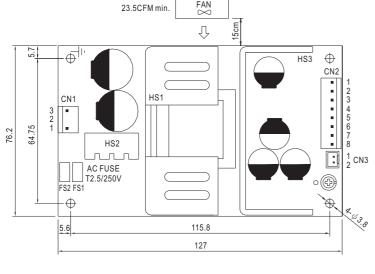


AC Input Connector (CN1): JST B3P-VH or equivalent				
Pin No.	Assignment	Mating Housing	Terminal	
1	AC/N	ICTVIID	JST SVH-21T-P1.1	
2	No Pin	JST VHR or equivalent	or equivalent	

## DC Output Connector (CN2): JST B8P-VH or equivalent


Pin No.	Assignment	Mating Housing	Terminal
1,2,3,4	+V	JST VHR	JST SVH-21T-P1.1
5,6,7,8	-V	or equivalent	or equivalent

#### Remote Sense(CN3): JST B2B-XH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	RS+	JST XHP	JST SXH-001T-P0.6
2	RS-	or equivalent	or equivalent




AC/L




## **■** Block Diagram

#### fosc: 65KHz

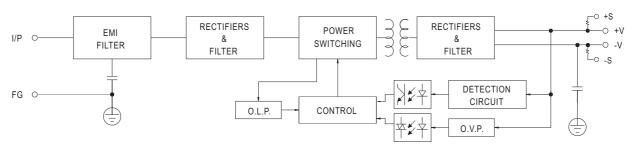

## ■ Derating Curve

## ■ Output Derating VS Input Voltage

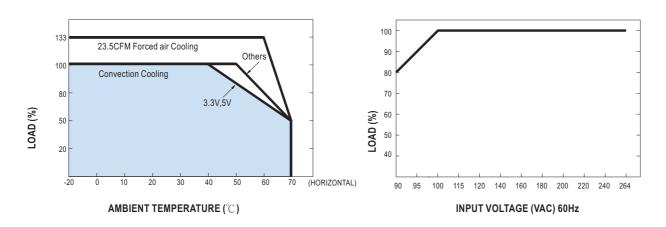

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **MEAN WELL:**

RPS-75-3.3 RPS-75-5 RPS-75-12 RPS-75-15 RPS-75-24 RPS-75-48 RPS-75-36