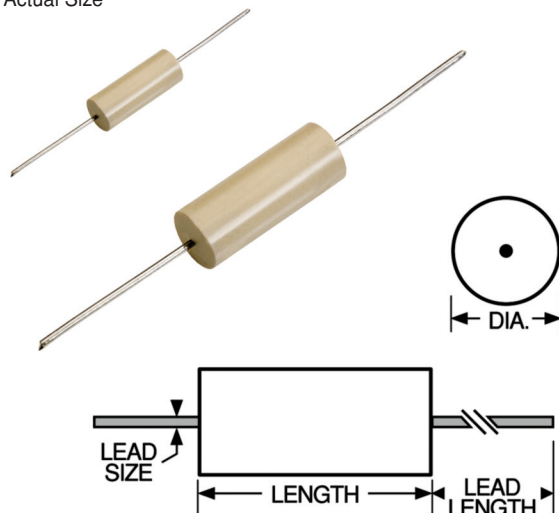


SERIES**1840R
1840****Molded Unshielded RF Coils**

Actual Size

**Military Specifications**

MS75008 (LT4K); MS75101 (LT10K)

Physical Parameters

	Inches	Millimeters
Length	0.437 ± 0.010	11.10 ± 0.25
Diameter	0.187 ± 0.010	4.75 ± 0.25
Lead Size		
AWG #22 TCW	0.025 ± 0.002	0.635 ± 0.051
Lead Length	1.44 ± 0.12	36.58 ± 3.05

Current Rating at 90°C Ambient

LT4K 35°C Rise

LT10K 15°C Rise

Operating Temperature Range

LT4K -55°C to +125°C;

LT10K -55°C to +105°C

Maximum Power Dissipation at 90°C

LT4K 0.385 W

LT10K 0.165 W

Weight Max. (Grams) 0.95

Marking DELEVAN; inductance with units and tolerance;
date code (YYWWL). Note: An R before the date code
indicates a RoHS component.

Example: 1840R-18K

<i>Front:</i>	<i>Reverse:</i>
DELEVAN	3.3uH±10%
3.3uH±10%	R 0910A

Packaging Tape & reel: 12" reel, 2500 pieces max.; 14"
reel, 3000 pieces max.

● No MS # Issued

Made in the U.S.A.

DASH NUMBER*
MIL DASH #
INDUCTANCE (μH)
TOLERANCE
Q MINIMUM
TEST FREQUENCY (MHz)
SRF MINIMUM (MHz)
DC RESISTANCE
MAXIMUM (OHMS)
CURRENT RATING
MAXIMUM (mA)

MS75008- SERIES 1840 PHENOLIC CORE (LT4K)								
-00M	21	0.15	± 20%	55	25.0	510	0.030	3050
-02M	22	0.22	± 20%	55	25.0	415	0.035	2820
-04M	23	0.33	± 20%	55	25.0	350	0.050	2360
-05M	24	0.39	± 20%	55	25.0	300	0.080	1860
-06M	24	0.47	± 20%	55	25.0	300	0.080	1860
-07K	25	0.56	± 10%	55	25.0	270	0.100	1670
-08K	26	0.68	± 10%	55	25.0	250	0.120	1520
-09K	27	0.82	± 10%	55	25.0	220	0.180	1240
-10K	28	1.00	± 10%	55	25.0	200	0.250	1050
-11K	29	1.20	± 10%	35	7.9	180	0.400	835
-12K	30	1.50	± 10%	35	7.9	170	0.485	755
-13K	31	1.80	± 10%	35	7.9	150	0.740	610
-14K	32	2.20	± 10%	35	7.9	140	0.900	555
-16K	33	2.70	± 10%	35	7.9	120	1.100	525
MS75101- SERIES 1840 IRON CORE (LT10K)								
-18K	1	3.30	± 10%	35	7.9	70	0.120	1020
-20K	2	3.90	± 10%	35	7.9	65	0.155	900
-22K	3	4.70	± 10%	35	7.9	60	0.210	775
-24K	4	5.60	± 10%	35	7.9	50	0.280	670
-26K	5	6.80	± 10%	35	7.9	50	0.375	580
-28K	6	8.20	± 10%	35	7.9	48	0.400	560
-30K	7	10.0	± 10%	35	7.9	42	0.600	455
-32K	8	12.0	± 10%	50	2.5	36	0.850	385
-34K	9	15.0	± 10%	55	2.5	30	1.200	324
-35K	10	18.0	± 10%	60	2.5	30	1.800	265
-36K	11	22.0	± 10%	60	2.5	24	2.000	251
-38K	12	27.0	± 10%	65	2.5	22	2.750	214

Parts listed above are QPL/MIL qualified

Optional Tolerances: J = 5% H = 3% G = 2% F = 1%

*Complete part # must include series # PLUS the dash #

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[1840R-34KTR](#) [1840-35K](#) [1840R-06MTR](#) [1840-13K](#) [1840-20JTR](#) [1840-22K](#) [1840-30K](#) [1840-34K](#) [1840-09K](#) [1840-36K](#) [1840R-22K](#) [1840-00M](#) [1840-00K](#) [1840-00J](#) [1840-00H](#) [1840-00G](#) [1840-00F](#) [1840-02M](#) [1840-02K](#) [1840-02J](#) [1840-02H](#) [1840-02G](#) [1840-02F](#) [1840-04M](#) [1840-04K](#) [1840-04J](#) [1840-04H](#) [1840-04G](#) [1840-04F](#) [1840-05M](#) [1840-05K](#) [1840-05J](#) [1840-05H](#) [1840-05G](#) [1840-05F](#) [1840-06M](#) [1840-06K](#) [1840-06J](#) [1840-06H](#) [1840-06G](#) [1840-06F](#) [1840-07K](#) [1840-07J](#) [1840-07H](#) [1840-07G](#) [1840-07F](#) [1840-08K](#) [1840-08J](#) [1840-08H](#) [1840-08G](#) [1840-08F](#) [1840-09J](#) [1840-09H](#) [1840-09G](#) [1840-09F](#) [1840-10K](#) [1840-10J](#) [1840-10H](#) [1840-10G](#) [1840-10F](#) [1840-11K](#) [1840-11J](#) [1840-11H](#) [1840-11G](#) [1840-11F](#) [1840-12K](#) [1840-12J](#) [1840-12H](#) [1840-12G](#) [1840-12F](#) [1840-13J](#) [1840-13H](#) [1840-13G](#) [1840-13F](#) [1840-14K](#) [1840-14J](#) [1840-14H](#) [1840-14G](#) [1840-14F](#) [1840-16K](#) [1840-16J](#) [1840-16H](#) [1840-16G](#) [1840-16F](#) [1840-18K](#) [1840-18J](#) [1840-18H](#) [1840-18G](#) [1840-18F](#) [1840-20K](#) [1840-20H](#) [1840-20G](#) [1840-20F](#) [1840-22J](#) [1840-22H](#) [1840-22G](#) [1840-22F](#) [1840-24K](#) [1840-24J](#) [1840-24H](#)