





PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1000	MHz
Upper Frequency:	1000			MHz
Tuning Voltage:	0		5.0	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+11.0	+13.5	+16.0	dBm
Supply Current:		35		mA
Harmonic Suppression (2 nd Harmonic)		-10	-5	dBc
Pushing:		5.0	10.0	MHz/V
Pulling, all Phases:		7.0	10.0	MHz pk-pk
Tuning Sensitivity:		120		kHz/V
Phase Noise @ 10kHz offset:		-135	-131	dBc/Hz
Phase Noise @ 100kHz offset:		-149	-146	dBc/Hz
Phase Noise @ 1MHz offset:		-163	-160	dBc/Hz
Phase Noise @ 10MHz offset:		-170	-167	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			22	pF
Operating Temperature Range:	-20		+70	°C
Storage Temperature Range:	-45		+90	°C


FRONT

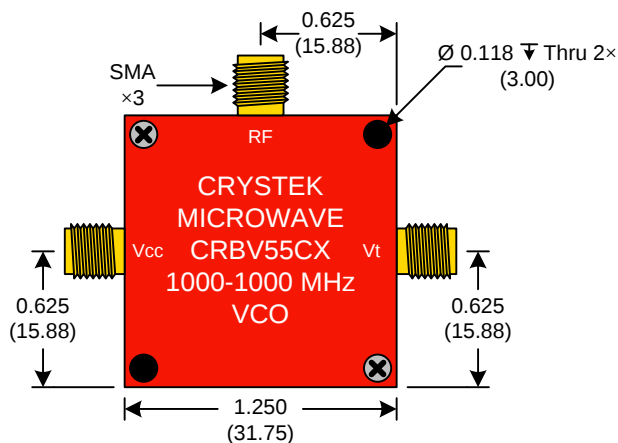

BACK

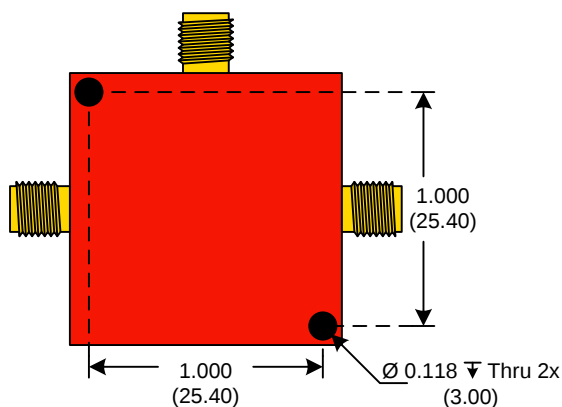

SIDE

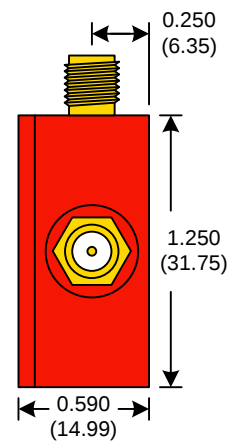

● Unless otherwise specified, Dimensions are in: $\frac{\text{IN}}{(\text{mm})}$

Product Control:

Crystek Part Number:	CRBV55CX-1000-1000	Release Date:	30-Sep-2013
Revision Level:	G	Responsible:	C. Vales






CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

RedBox VCO
CRBV55CX-1000-1000



Phase Noise (1 Hz BW, Typical)

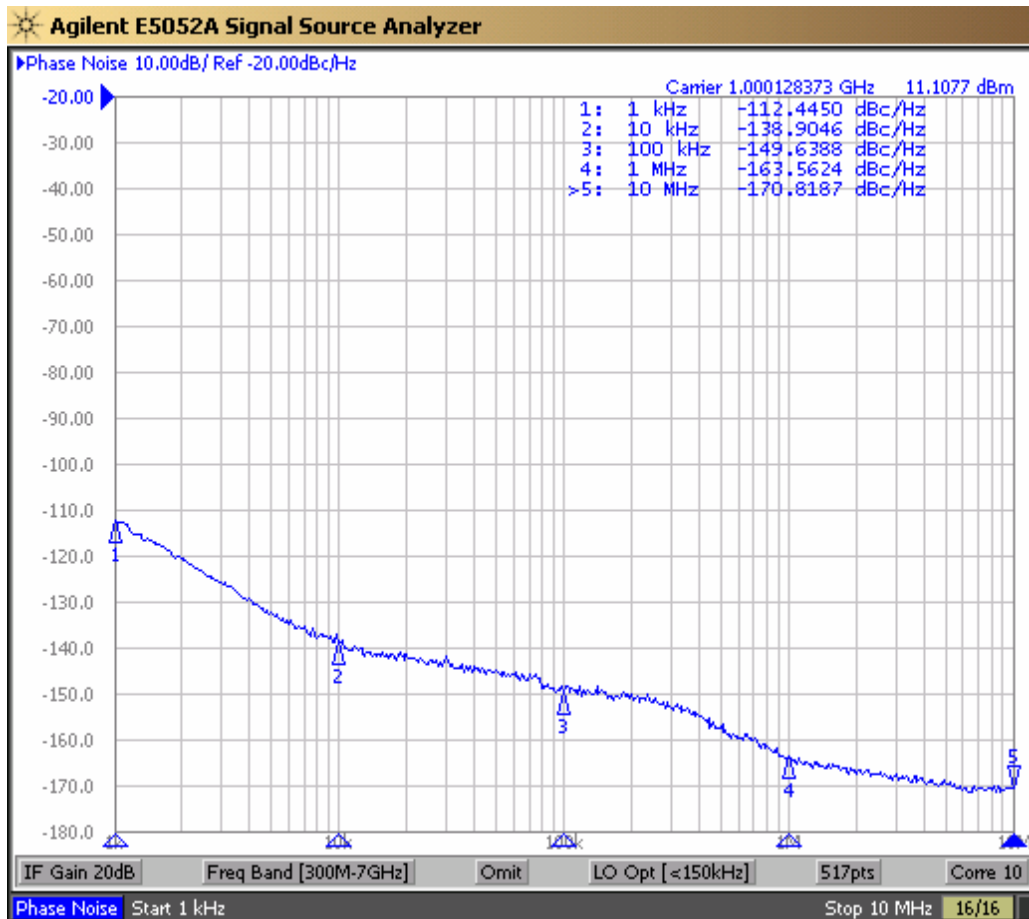

Product Control:

Crystek Part Number:	CRBV55CX-1000-1000	Release Date:	30-Sep-2013
Revision Level:	G	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CRBV55CX-1000-1000](#)