

### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



## FDC5612

### 60V N-Channel PowerTrench® MOSFET

#### **General Description**


This N-Channel MOSFET has been designed specifically to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers.


These MOSFETs feature faster switching and lower gate charge than other MOSFETs with comparable  $R_{\rm DS(ON)}$  specifications.

The result is a MOSFET that is easy and safer to drive (even at very high frequencies), and DC/DC power supply designs with higher overall efficiency.

#### **Features**

- 4.3 A, 60 V.  $R_{DS(ON)} = 0.055~\Omega~$  @  $V_{GS} = 10~V$   $R_{DS(ON)} = 0.064~\Omega~$  @  $V_{GS} = 6~V$
- Low gate charge (12.5nC typical).
- Fast switching speed.
- High performance trench technology for extremely low  $R_{\scriptscriptstyle DS(ON)}$ .
- SuperSOT™-6 package: small footprint (72% smaller than standard SO-8); low profile (1mm thick).





Absolute Maximum Ratings T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter		Ratings	Units
$V_{DSS}$	Drain-Source Voltage		60	V
$V_{GSS}$	Gate-Source Voltage		<u>+</u> 20	V
$I_D$	Drain Current - Continuous	(Note 1a)	4.3	Α
	Drain Current - Pulsed		20	
P <sub>D</sub>	Power Dissipation for Single Operation	(Note 1a)	1.6	W
		(Note 1b)	0.8	
$T_J$ , $T_{stq}$	Operating and Storage Junction Temperature Range		-55 to +150	∘C

**Thermal Characteristics** 

$R_{\theta^{JA}}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	78	∘C/W
R <sub>OJC</sub>	Thermal Resistance, Junction-to-Case	(Note 1)	30	°C/W

**Package Outlines and Ordering Information** 

Device Marking	Device	Reel Size	Tape Width	Quantity
.562	FDC5612	7"	8mm	3000 units

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Char	acteristics					
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_{D} = 250 \mu\text{A}$	60			V
ΔBVDSS ΔTJ	Breakdown Voltage Temperature Coefficient	$I_D = 250 \mu A$ , Referenced to 25°C		58		mV/∘C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	$V_{DS} = 48 \text{ V}, V_{GS} = 0 \text{ V}$			1	μΑ
I <sub>GSSF</sub>	Gate-Body Leakage Current, Forward	V <sub>GS</sub> = 20 V, V <sub>DS</sub> = 0 V			100	nA
I <sub>GSSR</sub>	Gate-Body Leakage Current, Reverse	V <sub>GS</sub> = -20 V, V <sub>DS</sub> = 0 V			-100	nA
On Char	racteristics (Note 2)					
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} = 250  \mu A$	2	2.2	4	V
$\Delta V$ GS(th) $\Delta T_J$	Gate Threshold Voltage Temperature Coefficient	$I_D$ = 250 $\mu$ A, Referenced to 25°C		-5.5		mV/°C
R <sub>DS(on)</sub>	Static Drain-Source On-Resistance	$V_{GS} = 10 \text{ V}, I_D = 4.3 \text{ A}$ $V_{GS} = 10 \text{ V}, I_D = 4.3 \text{ A}, T_J = 125 ^{\circ}\text{C}$ $V_{GS} = 6 \text{ V}, I_D = 4 \text{ A}$		0.042 0.072 0.048	0.055 0.094 0.064	Ω
I <sub>D(on)</sub>	On-State Drain Current	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 5 V	10			Α
g <sub>FS</sub>	Forward Transconductance	$V_{DS} = 10 \text{ V}, I_D = 4.3 \text{ A}$		14		S
Dvnamio	Characteristics					
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 25 V, V <sub>GS</sub> = 0 V,		650		pF
Coss	Output Capacitance	f = 1.0 MHz		80		pF
C <sub>rss</sub>	Reverse Transfer Capacitance			35		pF
Switchin	ng Characteristics (Note 2)					
t <sub>d(on)</sub>	Turn-On Delay Time	$V_{DD} = 30 \text{ V}, I_D = 1 \text{ A},$		11	20	ns
t <sub>r</sub>	Turn-On Rise Time	$V_{GS} = 10 \text{ V}, R_{GEN} = 6 \Omega$		8	18	ns
$t_{d(off)}$	Turn-Off Delay Time			19	35	ns
t <sub>f</sub>	Turn-Off Fall Time			6	15	ns
$Q_g$	Total Gate Charge	$V_{DS} = 30 \text{ V}, I_D = 4.3 \text{ A},$		12.5	18	nC
Q <sub>gs</sub>	Gate-Source Charge	V <sub>GS</sub> = 10 V		2.4		nC
$Q_{gd}$	Gate-Drain Charge			2.6		nC
Drain-Sc	ource Diode Characteristics and	d Maximum Ratings				
I <sub>s</sub>	Maximum Continuous Drain-Source Did				1.3	Α
V <sub>SD</sub>	Drain-Source Diode Forward Voltage	$V_{GS} = 0 \text{ V}, I_{S} = 1.3 \text{ A}$ (Note 2)		0.75	1.2	V

R<sub>QJA</sub> is the sum of the junction-to-case and case-to-ambient resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. R<sub>QJC</sub> is guaranteed by design while R<sub>QCA</sub> is determined by the user's board design.

 a) 78 °C/W when mounted on a 1.0 in² pad of 2 oz. copper.

b) 156 °C/W when mounted on a minimum pad.

<sup>2.</sup> Pulse Test: Pulse Width £ 300 ms, Duty Cycle £ 2.0%

### **Typical Characteristics**




Figure 1. On-Region Characteristics.




Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.




Figure 3. On-Resistance Variation with Temperature.




Figure 4. On-Resistance Variation with Gate-to-Source Voltage.




Figure 5. Transfer Characteristics.





Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

### **Typical Characteristics**






Figure 7. Gate Charge Characteristics.




Figure 8. Capacitance Characteristics.




Figure 9. Maximum Safe Operating Area.



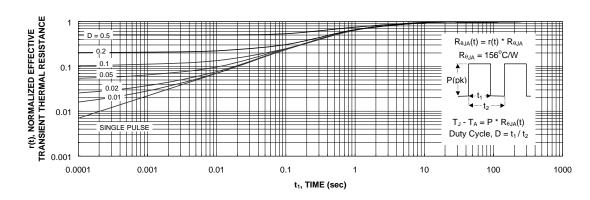


Figure 11. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1b. Transient thermal response will change depending on the circuit board design.

#### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

$ACEx^{TM}$	FAST®	ISOPLANAR™	Power247™	Stealth™
ActiveArray™	FASTr™	LittleFET™	PowerEdge™	SuperFET™
Bottomless™	FPS™	$MICROCOUPLER^{TM}$	PowerSaver™	SuperSOT™-3
CoolFET™	FRFET™	MicroFET™	PowerTrench®	SuperSOT™-6
CROSSVOLT™	GlobalOptoisolator™	MicroPak™	QFET®	SuperSOT™-8
DOME™	GTO™ .	MICROWIRE™	$QS^{TM}$	SyncFET™
EcoSPARK™	HiSeC™	MSXTM	QT Optoelectronics™	TinyLogic <sup>®</sup>
E <sup>2</sup> CMOS <sup>TM</sup>	I <sup>2</sup> C <sup>TM</sup>	MSXPro™	Quiet Series™	TINYOPTO™
EnSigna™	<i>i-</i> Lo <sup>™</sup>	$OCX^{TM}$	RapidConfigure™	TruTranslation™
FACT™	ImpliedDisconnect™	OCXPro™	RapidConnect™	UHC™
FACT Quiet Serie	es <sup>™</sup>	OPTOLOGIC®	μSerDes™	UltraFET <sup>®</sup>
The Power Franchise®		OPTOPLANAR <sup>TM</sup> PACMAN <sup>TM</sup> POP <sup>TM</sup>	SILENT SWITCHER® SMART START™ SPM™	UniFET™ VCX™

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Rev. I14

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FDC5612