



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# LM319


## Dual Comparator

### Features


- Operates From a Single 5V Supply
- Typically 80ns Response Time at  $\pm 15V$
- Open Collector Outputs : up to +35V
- High Output Drive Current : 25mA
- Inputs and Outputs can be Isolated From System Ground
- Minimum Fan-Out of 2 (Each Side)
- Two Independent Comparators

### Description


The LM319 is a dual high speed voltage comparator designed to operate from a single +5V supply up to  $\pm 15V$  dual supplies. Open collector of the output stage makes the LM319 compatible with RTL, DTL and TTL as well as capable of driving lamps and relays at currents up to 25mA. Typical response time of 80ns with  $\pm 15V$  power supplies makes the LM319 ideal for application in fast A/D converts, level shifter, oscillators, and multivibrators.



### Internal Block Diagram

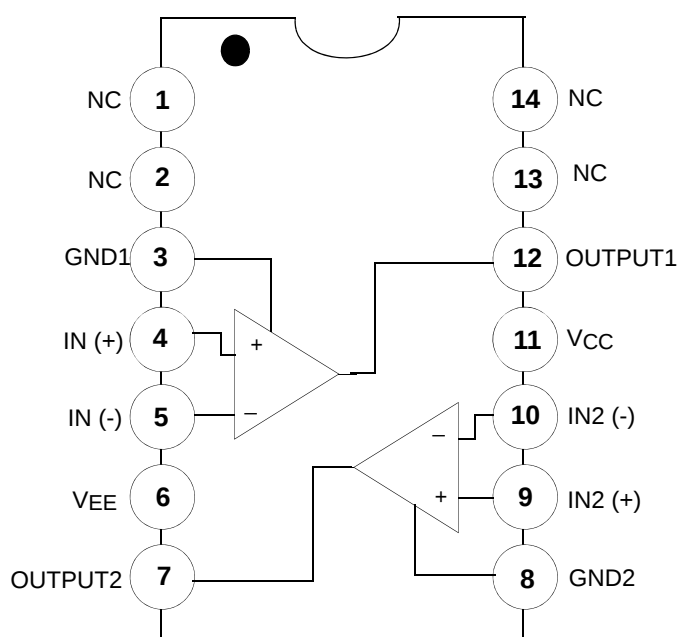

## Schematic Diagram

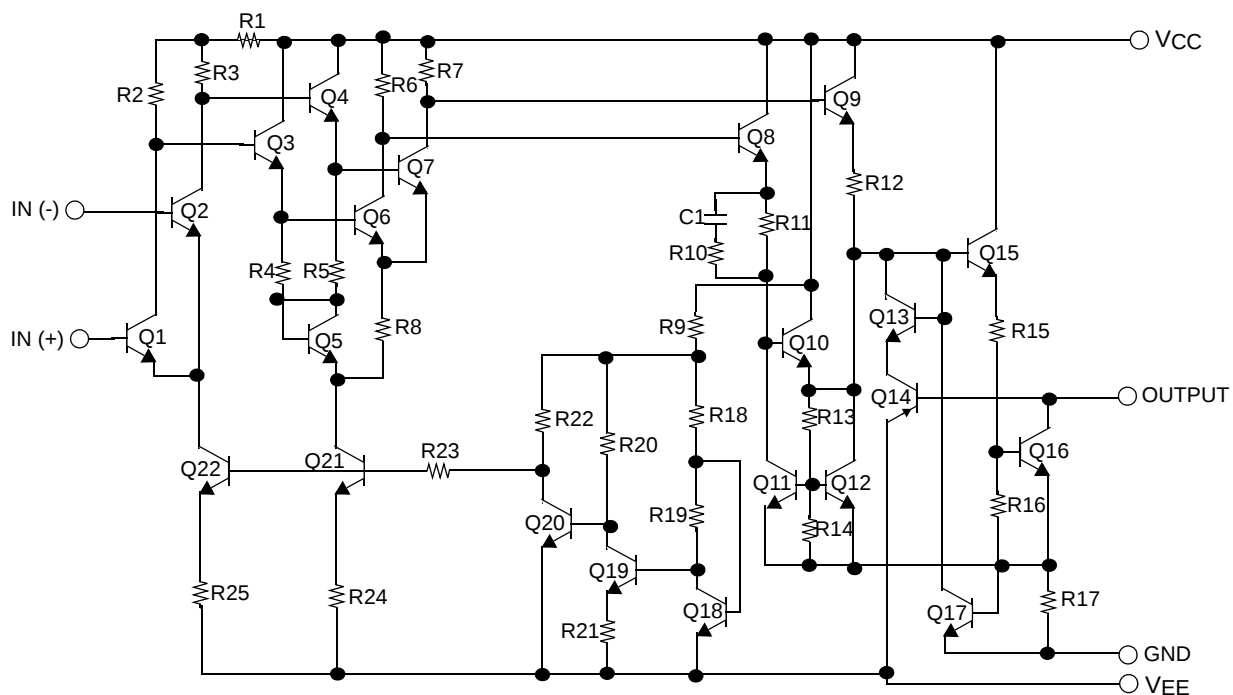

## Absolute Maximum Ratings

| Parameter                                | Symbol   | Value      | Unit |
|------------------------------------------|----------|------------|------|
| Supply Voltage                           | VCC      | 36         | V    |
| Output to Negative Supply Voltage        | VO - VEE | 36         | V    |
| Ground to Negative Supply Voltage        | VEE      | 25         | V    |
| Ground to Positive Supply Voltage        | VCC      | 18         | V    |
| Differential Input Voltage               | VI(DIFF) | 5          | V    |
| Input Voltage                            | VI       | ±15        | V    |
| Output Short Circuit Duration            | -        | 10         | sec  |
| Power Dissipation                        | PD       | 500        | mW   |
| Thermal Resistance Junction-Ambient Max. | Rθja     | 250        | °C/W |
| Operating Temperature Range              | TOPR     | 0 ~ +70    | °C   |
| Storage Temperature Range                | TSTG     | -65 ~ +150 | °C   |

## Electrical Characteristics

( $V_{CC} = +15V$ ,  $V_{EE} = -15V$ ,  $T_A = 25^{\circ}C$ , unless otherwise specified)

| Parameter                    | Symbol        | Conditions                                                             | LM319 |          |         | Unit    |
|------------------------------|---------------|------------------------------------------------------------------------|-------|----------|---------|---------|
|                              |               |                                                                        | Min.  | Typ.     | Max.    |         |
| Input Offset Voltage (Note1) | $V_{IO}$      | $R_S \leq 5k\Omega$                                                    | -     | 2.0      | 8.0     | mV      |
|                              |               | Note3                                                                  | -     | -        | 10      |         |
| Input Offset Current (Note1) | $I_{IO}$      |                                                                        | -     | 10       | 200     | nA      |
|                              |               | Note3                                                                  | -     | -        | 300     |         |
| Input Bias Current           | $I_{BIAS}$    |                                                                        | -     | 150      | 1000    | nA      |
|                              |               | Note3                                                                  | -     | -        | 1200    |         |
| Voltage Gain                 | $G_V$         | -                                                                      | 8     | 40       | -       | V/mV    |
| Response Time (Note2)        | $T_{RES}$     | $V_{CC} = \pm 15V$                                                     | -     | 80       | -       | ns      |
| Saturation Voltage           | $V_{SAT}$     | $V_{CC}=15V, V_{EE} = -15V, V_I \leq -5mV, I_O = 25mA$                 | -     | 0.6      | 1.5     | V       |
|                              |               | $V_{CC} = 4.5V, V_{EE} = 0V$<br>$V_I \leq -10mV, I_O \leq 3.2mA$ Note3 | -     | 0.3      | 0.4     |         |
| Output Leakage Current       | $I_{O(LKG)}$  | $V_I \geq 5mV, V_{O(P)} = 35V$                                         | -     | -        | -       | $\mu A$ |
|                              |               | Note3                                                                  | -     | -        | -       |         |
|                              |               | $V_I \geq 10mV, V_{O(P)} = 35V$                                        | -     | 0.2      | 10      |         |
| Input Voltage Range          | $V_{I(R)}$    | Note3                                                                  | -     | $\pm 13$ | -       | V       |
|                              |               | $V_{CC} = \pm 15V$<br>$V_{CC} = 5V, V_{EE} = 0V$                       | -     | 1        | 3       |         |
| Differential Input Voltage   | $V_{I(DIFF)}$ | -                                                                      | -     | -        | $\pm 5$ | V       |
| Positive Supply Current      | $I_{CC1}$     | $V_{CC} = 5V, V_{EE} = 0V$                                             | -     | 3.6      | -       | mA      |
| Positive Supply Current      | $I_{CC2}$     | $V_{CC} = \pm 15V$                                                     | -     | 7.5      | 12.5    | mA      |
| Negative Supply Current      | $I_{EE}$      | $V_{CC} = \pm 15V$                                                     | -     | 3        | 5       | mA      |

### Notes :

1. The offset voltage and offset currents given are the maximum values required to drive the output within a volt of either supply with a 1mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.
2. The response time specified is for a 100mV input step with 5mV overdrive.
3. LM319 :  $0 \leq T_A \leq +70^{\circ}C$

## Typical Performance Characteristics

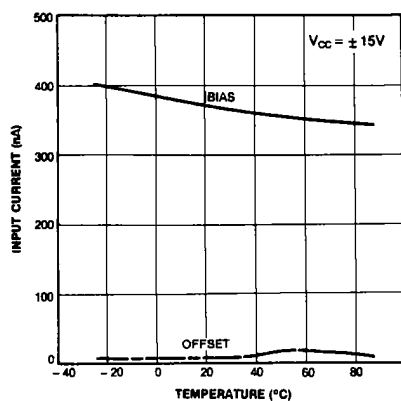


Figure 1. Input Current

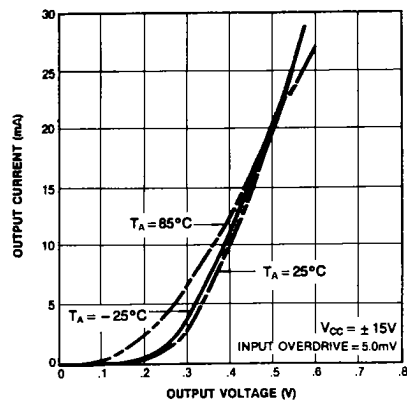


Figure 2. Output Saturation Voltage

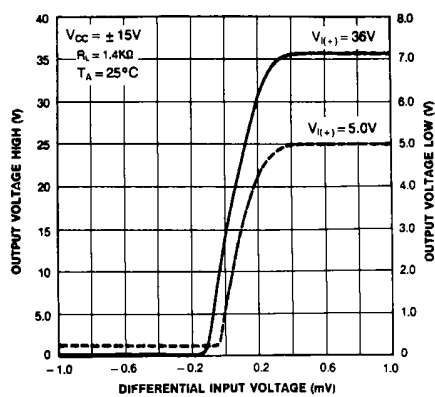


Figure 3. Transfer Function

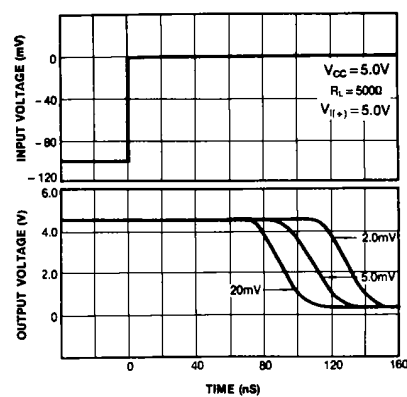


Figure 4. Response Time for Various Input Overdrive

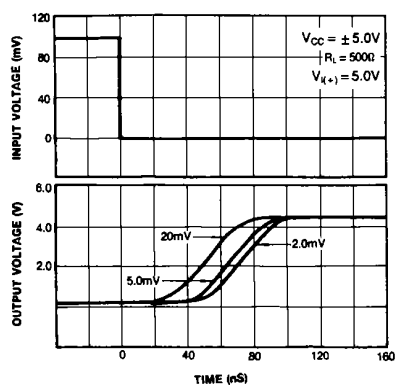


Figure 5. Response Time Various Input Overdrive

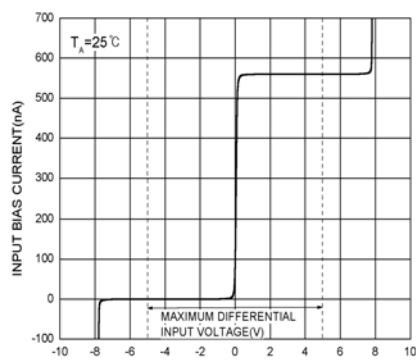


Figure 6. Input Characteristics

## Typical Performance Characteristics (Continued)

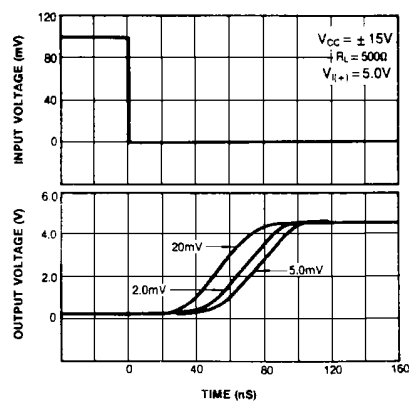


Figure 7. Response Time for Various Input Overdriver

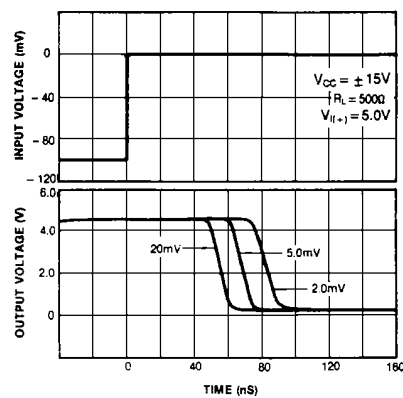


Figure 8. Response Time for Various Input Overdriver

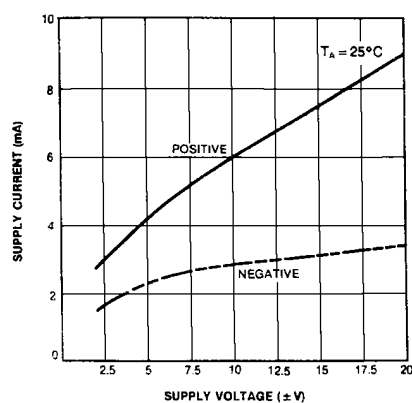


Figure 9. Supply Current

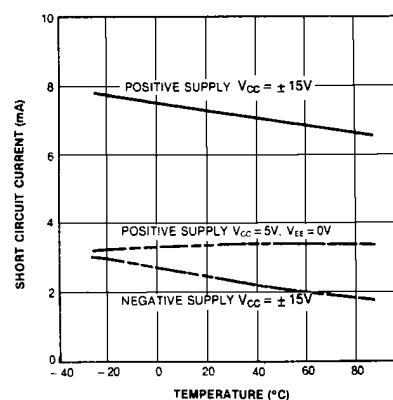


Figure 10. Supply Current

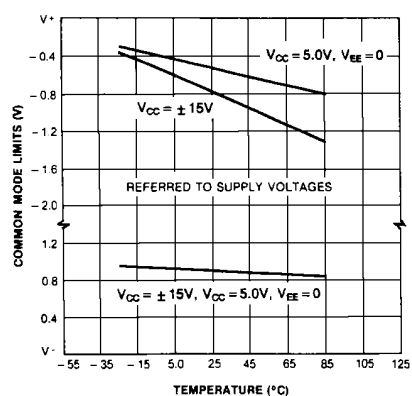


Figure 11. Common Mode Limits

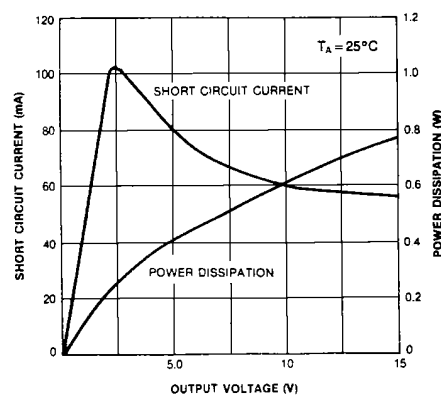



Figure 12. Output Limiting Characteristics

Mechanical Dimensions

Package

Dimensions in millimeters

14-DIP

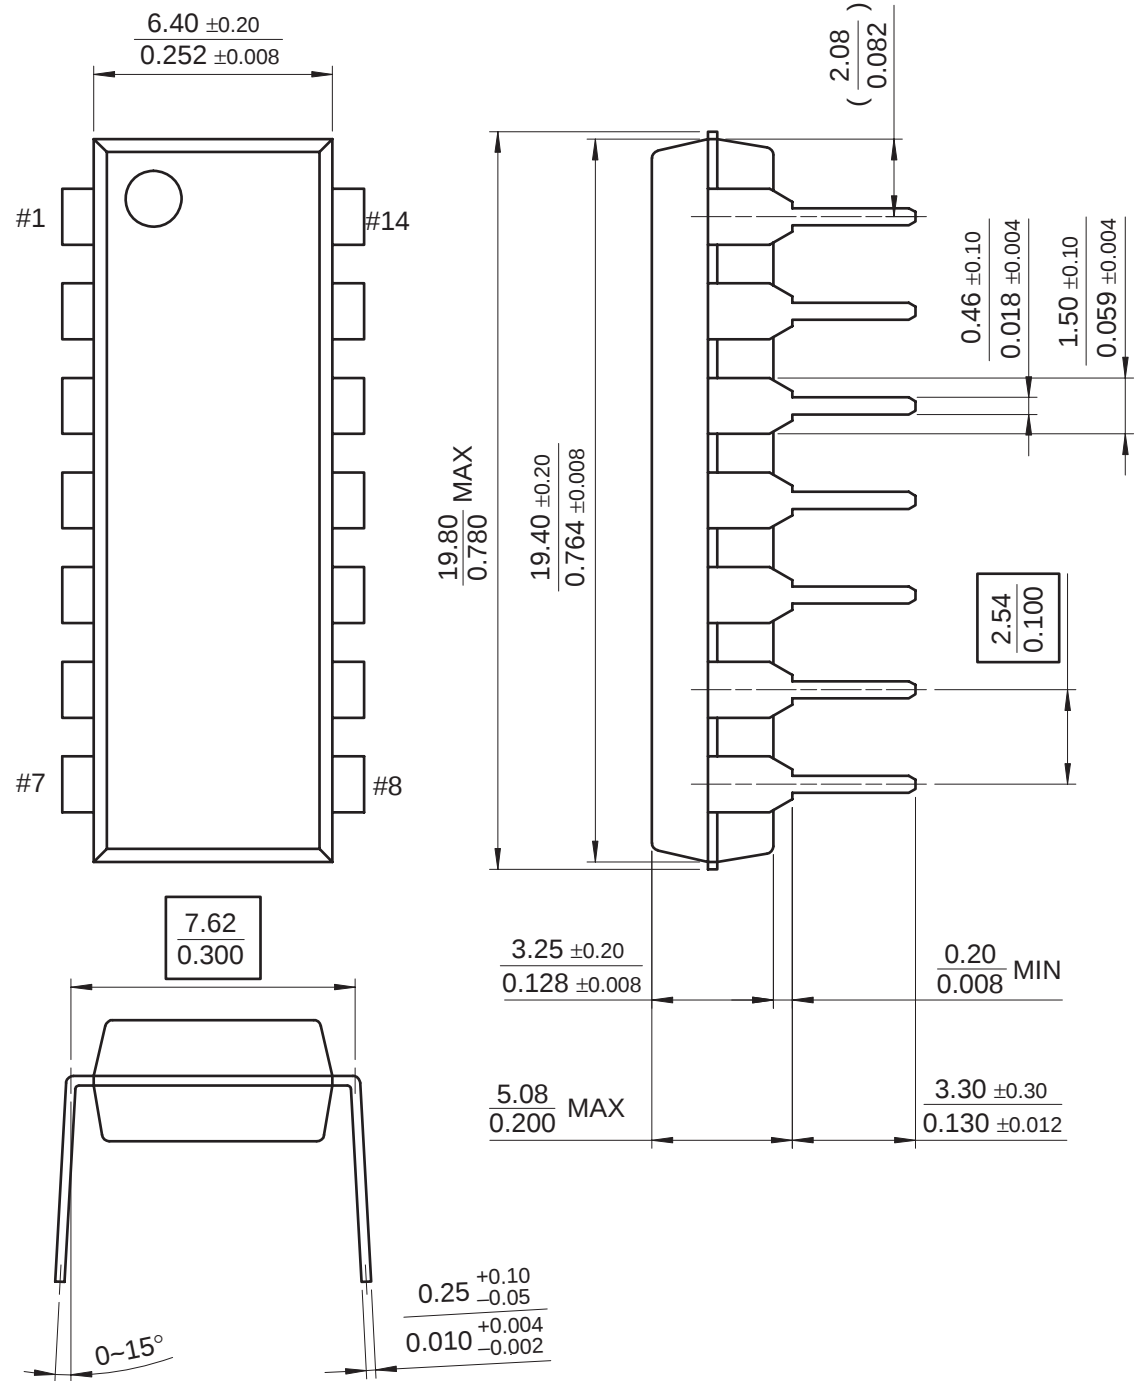


# Mechanical Dimensions (Continued)

## Package


Dimensions in millimeters

## 14-SOP

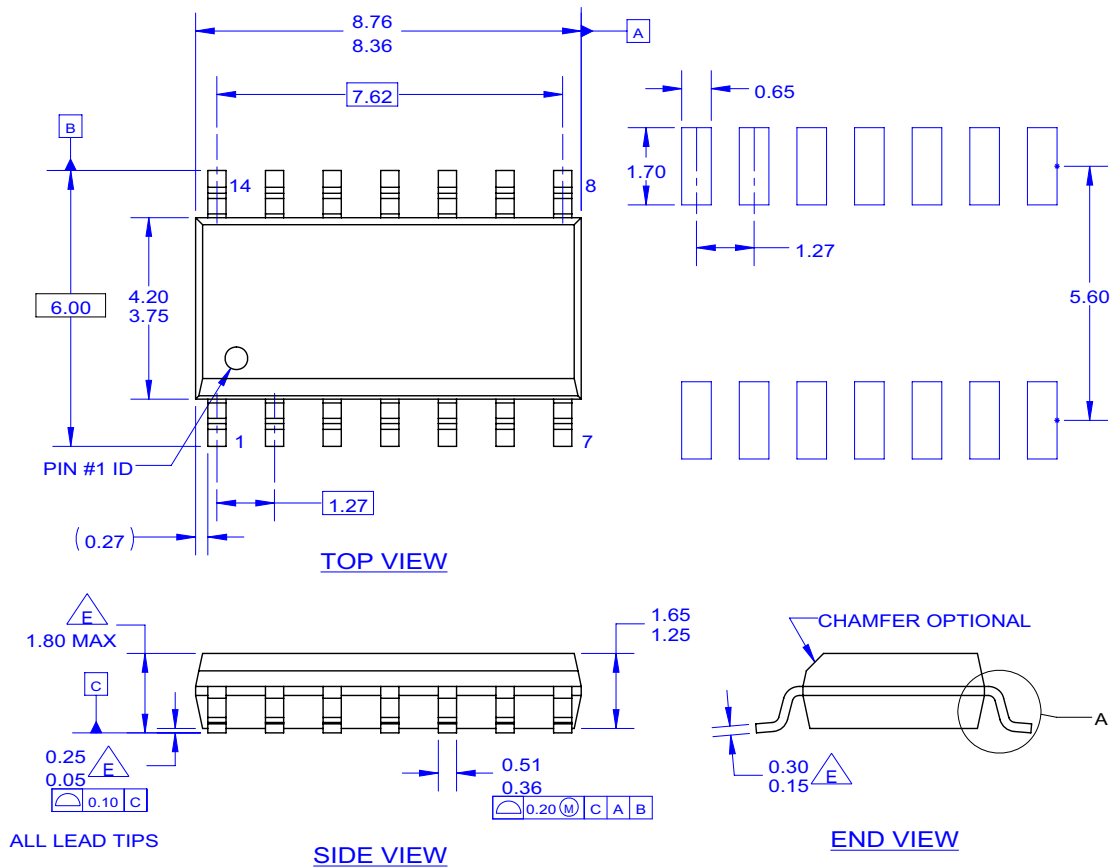

NOTES: UNLESS OTHERWISE SPECIFIED

- A. THIS PACKAGE REFERENCE TO JEDEC MS-012 VARIATION AB.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES AS PER ASME Y14.5-1994.
- E. OUT OF JEDEC STANDARD VALUE.
- F. LAND PATTERN STANDARD: SOIC127P600X145-14M.
- G. FILE NAME: MKT-M14C REV2

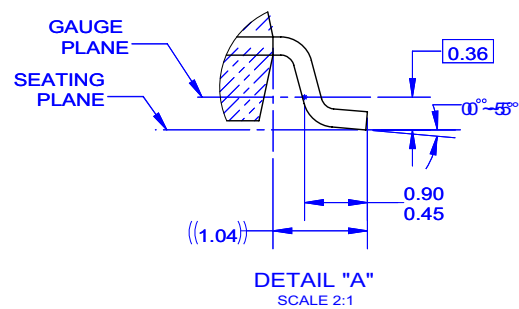

## Ordering Information

| Product Number | Package | Operating Temperature |
|----------------|---------|-----------------------|
| LM319N         | 14-DIP  | 0 ~ +70°C             |
| LM319M         | 14-SOP  |                       |

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fairchild Semiconductor:](#)

[LM319N](#) [LM319M](#) [LM319MX](#)