



## Silicon Switching Diode


- For high-speed switching applications
- Series pair configuration
- BAV99S / U: For orientation in reel see package information below
- Pb-free (RoHS compliant) package<sup>1)</sup>
- Qualified according AEC Q101

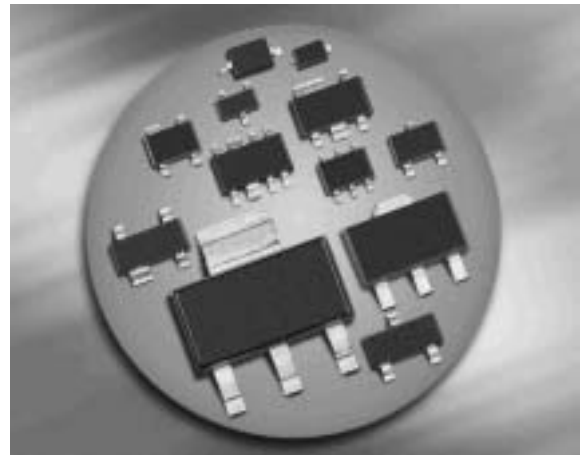

### BAV99 BAV99W



### BAV99S BAV99U



| Type   | Package | Configuration | Marking |
|--------|---------|---------------|---------|
| BAV99  | SOT23   | series        | A7s     |
| BAV99S | SOT363  | dual series   | A7s     |
| BAV99U | SC74    | dual series   | A7s     |
| BAV99W | SOT323  | series        | A7s     |

<sup>1)</sup>Pb-containing package may be available upon special request

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                 | Symbol    | Value       | Unit             |
|-------------------------------------------|-----------|-------------|------------------|
| Diode reverse voltage                     | $V_R$     | 80          | V                |
| Peak reverse voltage                      | $V_{RM}$  | 85          |                  |
| Forward current                           | $I_F$     | 200         | mA               |
| Non-repetitive peak surge forward current | $I_{FSM}$ |             | A                |
| $t = 1 \mu\text{s}$                       |           | 4.5         |                  |
| $t = 1 \text{ ms}$                        |           | 1           |                  |
| $t = 1 \text{ s, single}$                 |           | 0.5         |                  |
| $t = 1 \text{ s, double}$                 |           | 0.75        |                  |
| Total power dissipation                   | $P_{tot}$ |             | mW               |
| BAV99, $T_S \leq 28^\circ\text{C}$        |           | 330         |                  |
| BAV99S, $T_S \leq 85^\circ\text{C}$       |           | 250         |                  |
| BAV99U, $T_S \leq 113^\circ\text{C}$      |           | 250         |                  |
| BAV99W, $T_S \leq 110^\circ\text{C}$      |           | 250         |                  |
| Junction temperature                      | $T_j$     | 150         | $^\circ\text{C}$ |
| Storage temperature                       | $T_{stg}$ | -65 ... 150 |                  |

#### Thermal Resistance

| Parameter                                | Symbol     | Value      | Unit |
|------------------------------------------|------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ |            | K/W  |
| BAV99                                    |            | $\leq 360$ |      |
| BAV99S                                   |            | $\leq 260$ |      |
| BAV99U                                   |            | $\leq 150$ |      |
| BAV99W                                   |            | $\leq 160$ |      |


<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter                                                                                                                                                                                               | Symbol            | Values                |                       |                                    | Unit          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------|-----------------------|------------------------------------|---------------|
|                                                                                                                                                                                                         |                   | min.                  | typ.                  | max.                               |               |
| DC Characteristics                                                                                                                                                                                      |                   |                       |                       |                                    |               |
| Breakdown voltage<br>$I_{\text{(BR)}} = 100\text{ }\mu\text{A}$                                                                                                                                         | $V_{\text{(BR)}}$ | 85                    | -                     | -                                  | V             |
| Reverse current<br>$V_{\text{R}} = 70\text{ V}$<br>$V_{\text{R}} = 25\text{ V}, T_{\text{A}} = 150\text{ }^{\circ}\text{C}$<br>$V_{\text{R}} = 70\text{ V}, T_{\text{A}} = 150\text{ }^{\circ}\text{C}$ | $I_{\text{R}}$    | -<br>-<br>-           | -<br>-<br>-           | 0.15<br>30<br>50                   | $\mu\text{A}$ |
| Forward voltage<br>$I_{\text{F}} = 1\text{ mA}$<br>$I_{\text{F}} = 10\text{ mA}$<br>$I_{\text{F}} = 50\text{ mA}$<br>$I_{\text{F}} = 100\text{ mA}$<br>$I_{\text{F}} = 150\text{ mA}$                   | $V_{\text{F}}$    | -<br>-<br>-<br>-<br>- | -<br>-<br>-<br>-<br>- | 715<br>855<br>1000<br>1200<br>1250 | mV            |

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter                                                                                                                    | Symbol   | Values |      |      | Unit |
|------------------------------------------------------------------------------------------------------------------------------|----------|--------|------|------|------|
|                                                                                                                              |          | min.   | typ. | max. |      |
| AC Characteristics                                                                                                           |          |        |      |      |      |
| Diode capacitance<br>$V_R = 0 \text{ V}, f = 1 \text{ MHz}$                                                                  | $C_T$    | -      | -    | 1.5  | pF   |
| Reverse recovery time<br>$I_F = 10 \text{ mA}, I_R = 10 \text{ mA}$ , measured at $I_R = 1\text{mA}$ ,<br>$R_L = 100 \Omega$ | $t_{rr}$ | -      | -    | 4    | ns   |

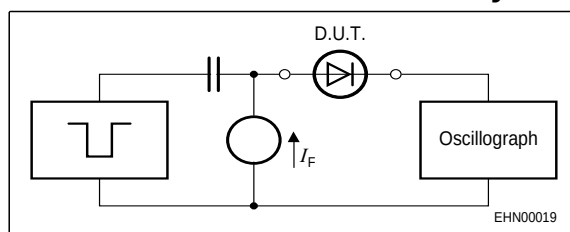
**Test circuit for reverse recovery time**


Pulse generator:  $t_p = 100 \text{ ns}$ ,  $D = 0.05$ ,  
 $t_r = 0.6 \text{ ns}$ ,  $R_i = 50 \Omega$

Oscilloscope:  $R = 50$ ,  $t_r = 0.35 \text{ ns}$   
 $C \leq 1 \text{ pF}$


**Reverse current  $I_R = f(T_A)$**

$V_R = \text{Parameter}$

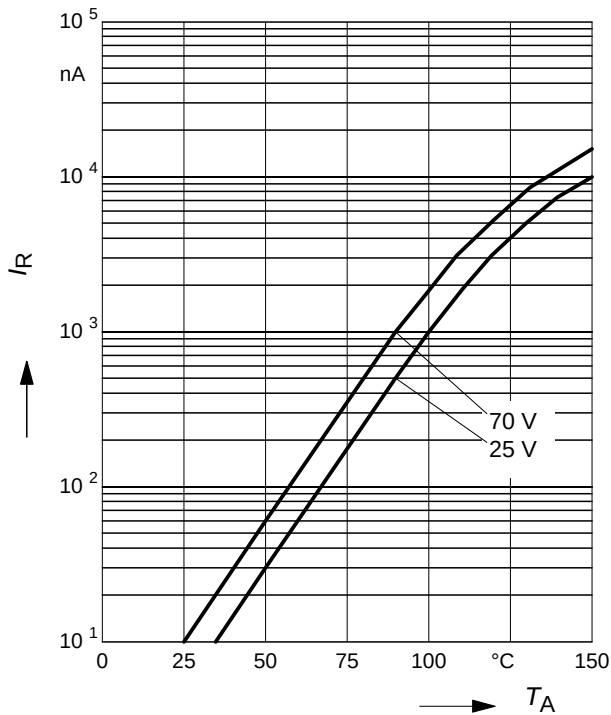


**Forward Voltage  $V_F = f(T_A)$**

$I_F = \text{Parameter}$

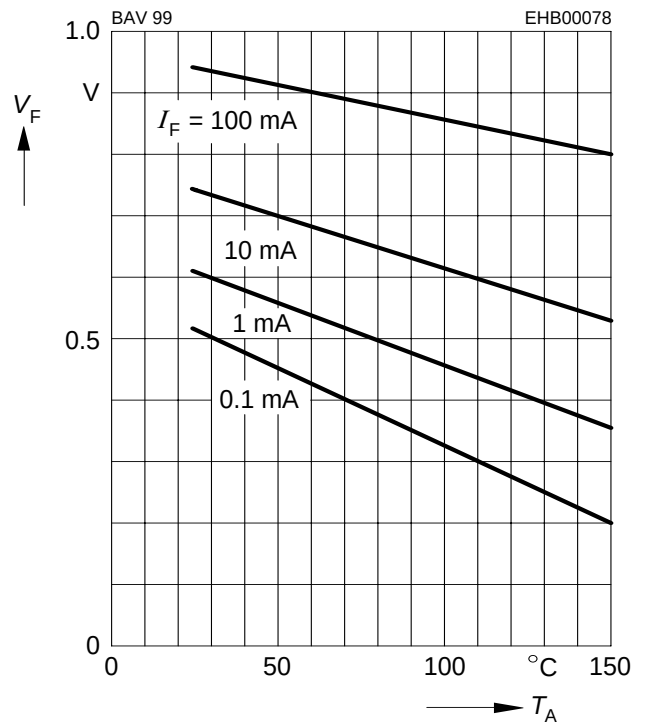


**Forward current  $I_F = f(V_F)$**

$T_A = 25^\circ\text{C}$

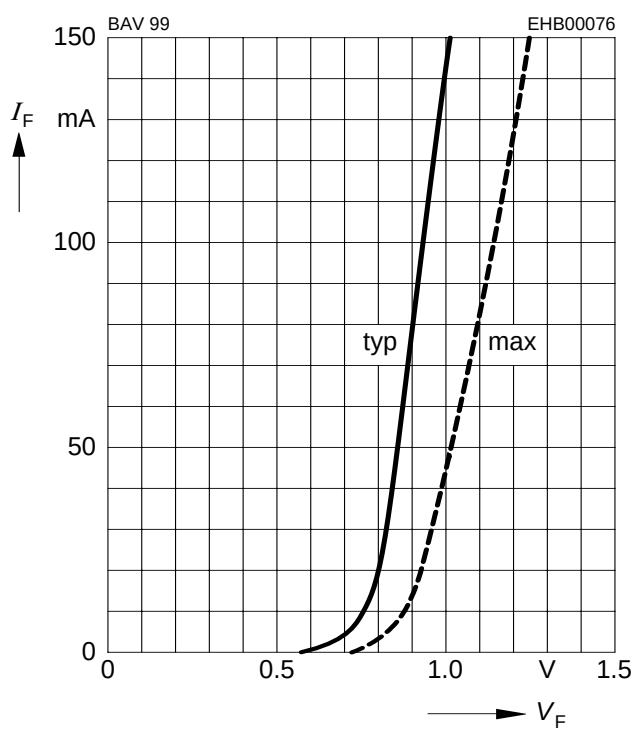


**Forward current  $I_F = f(T_S)$**

BAV99

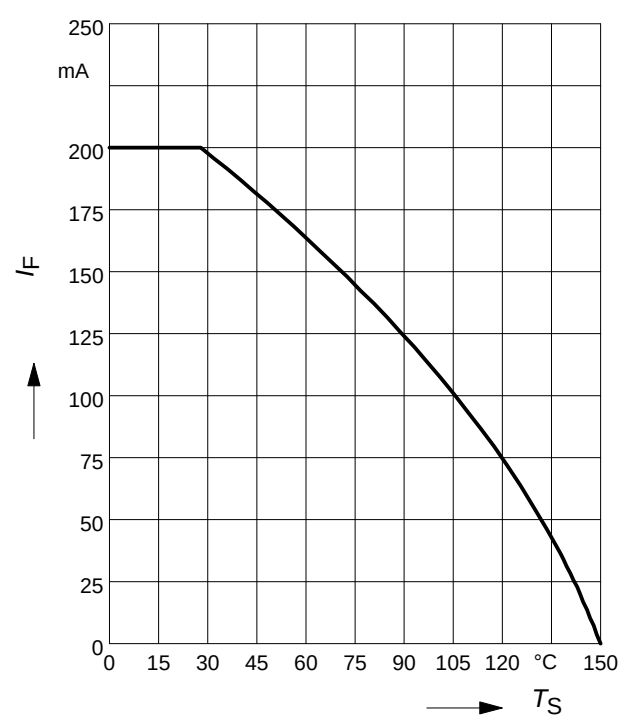


Forward current  $I_F = f(T_S)$

BAV99S

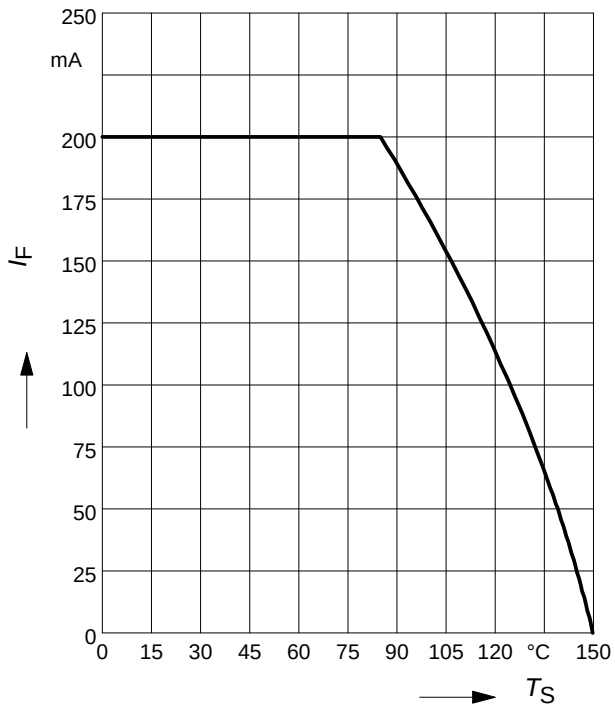


Forward current  $I_F = f(T_S)$

BAV99U

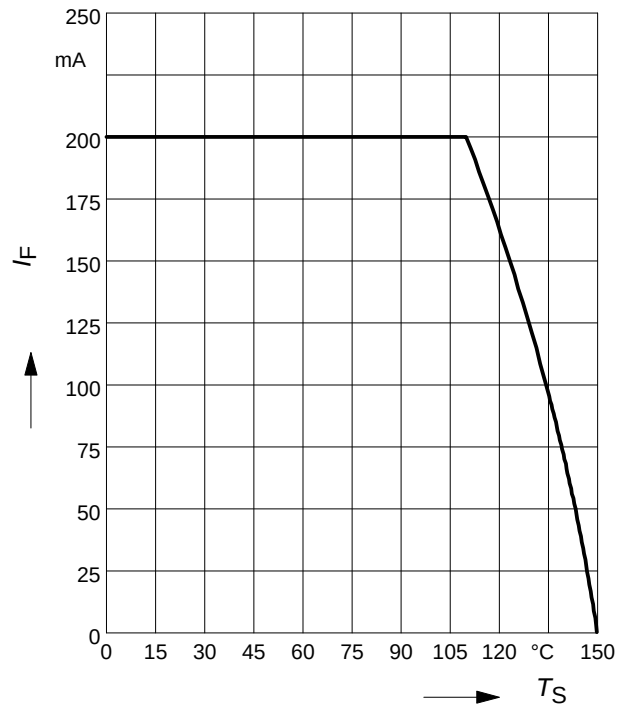


Forward current  $I_F = f(T_S)$

BAV99W

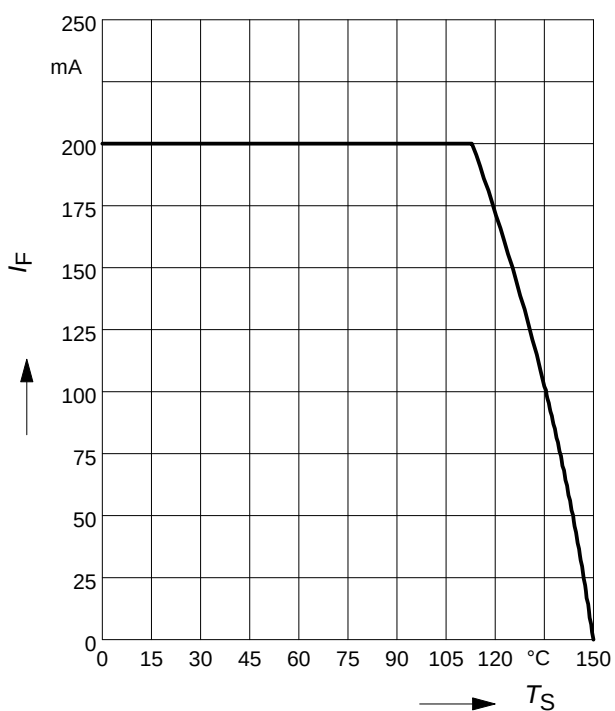

Permissible Puls Load  $R_{thJS} = f(t_p)$


BAV99

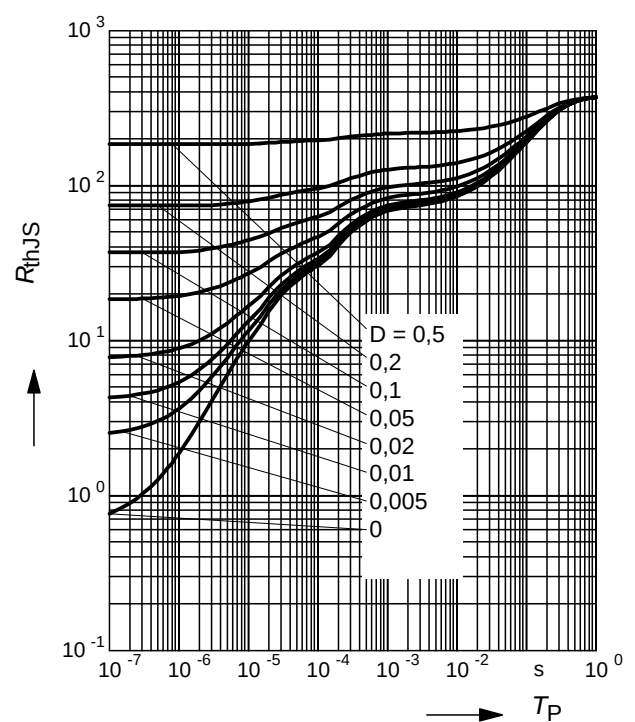

### Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99

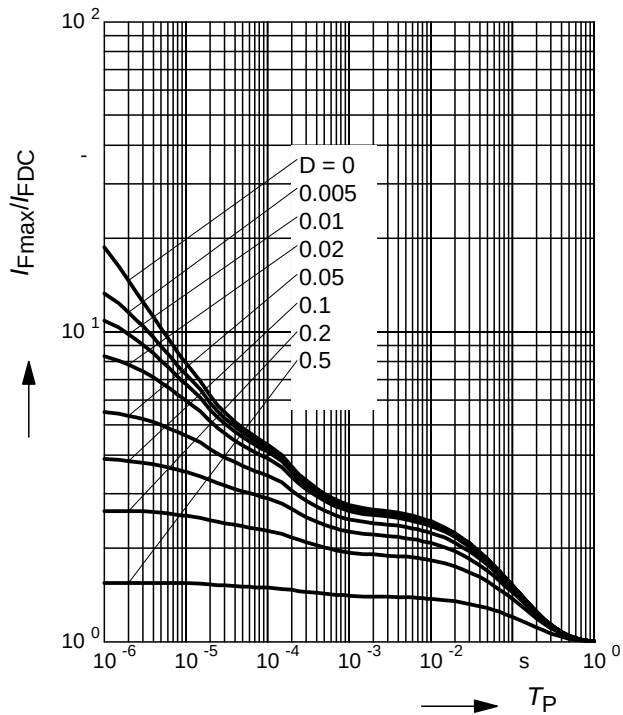

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99S

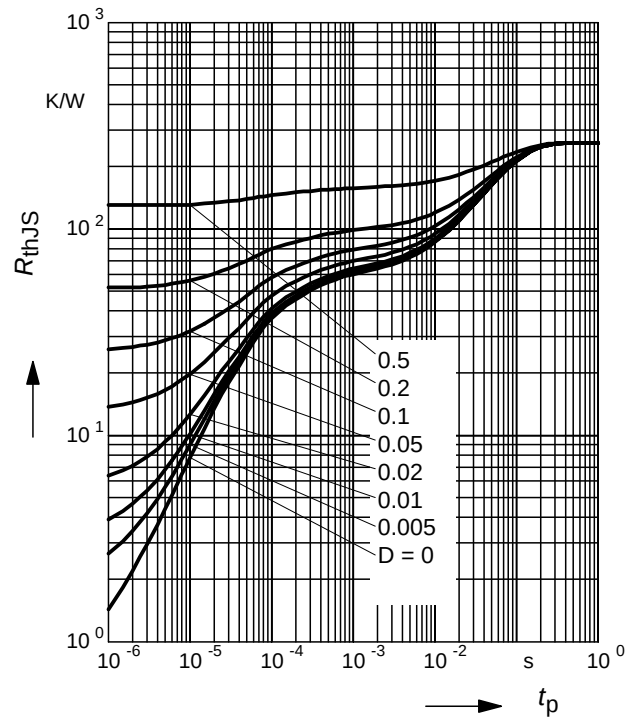

### Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99S

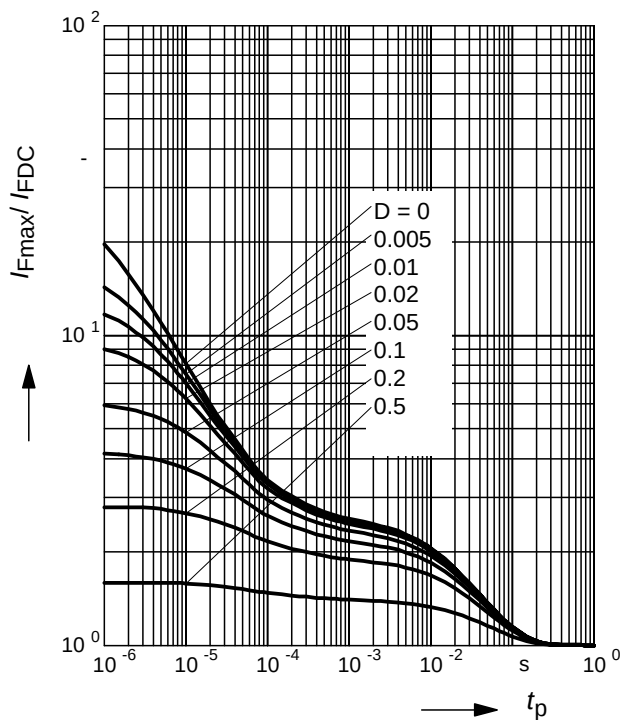

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99U

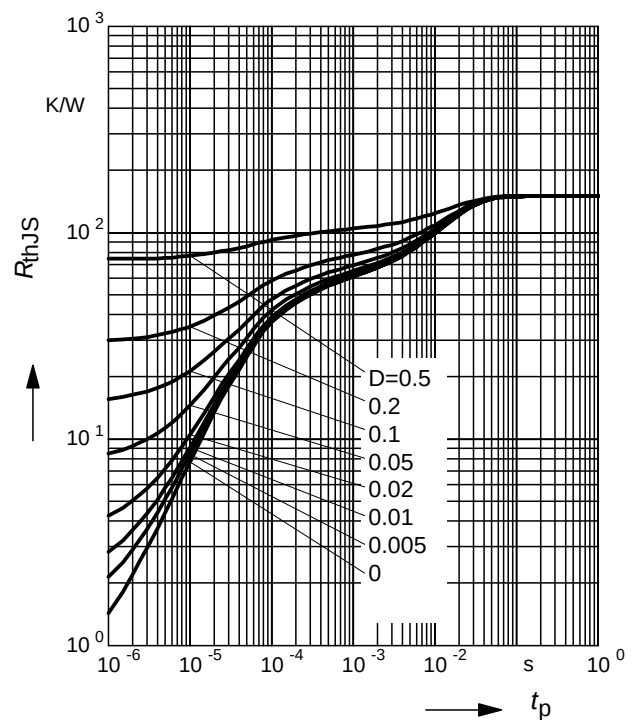

### Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99U

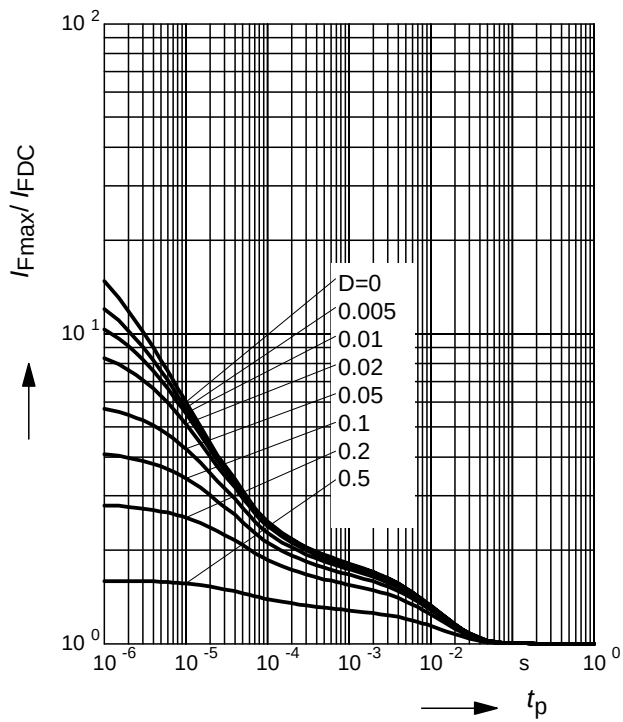

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99W

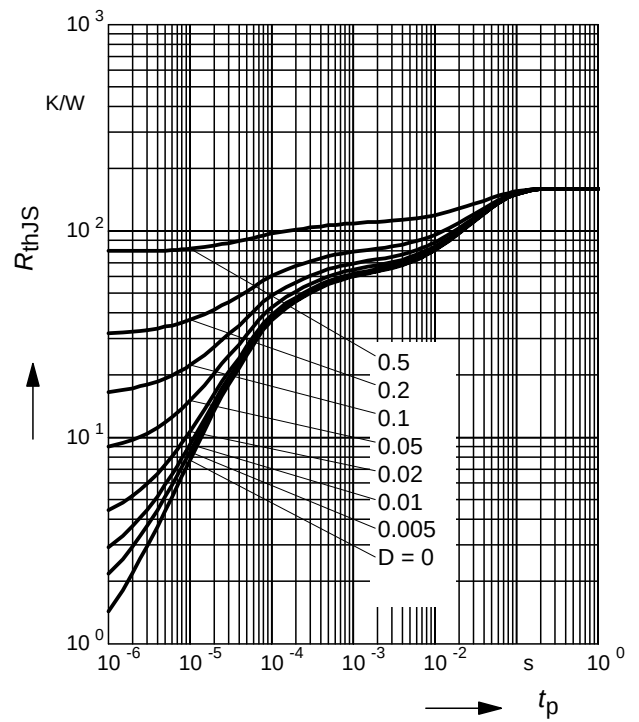


### Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$


BAV99W

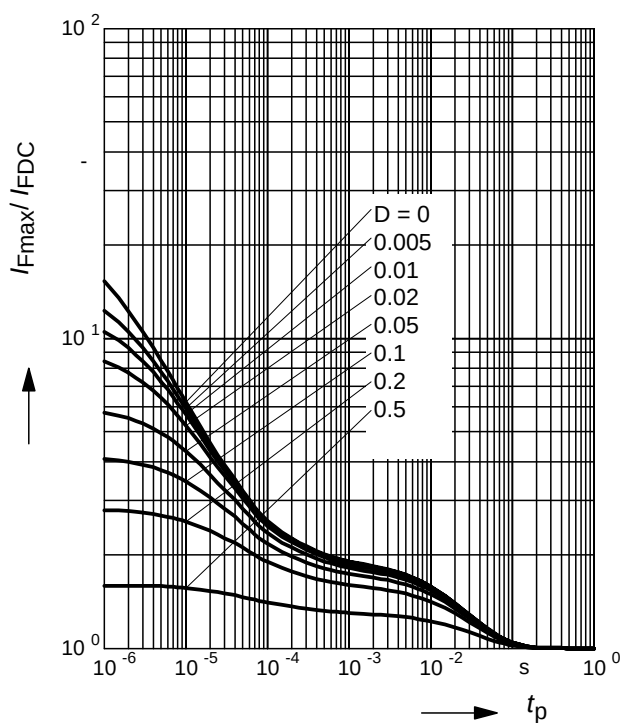

## Package Outline

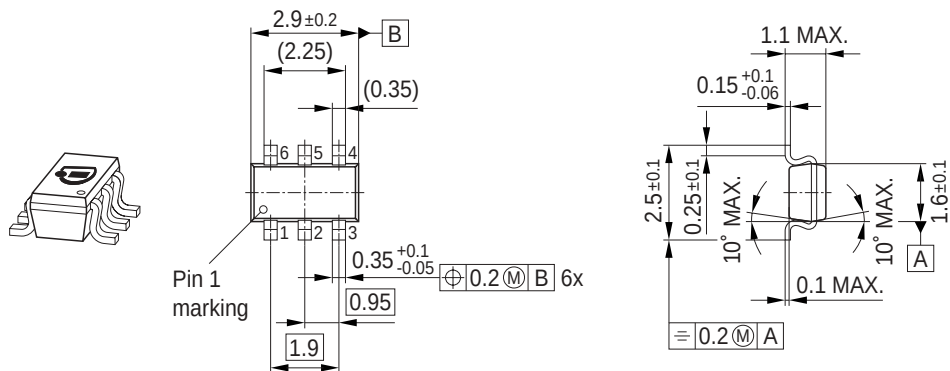


## Foot Print



## Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

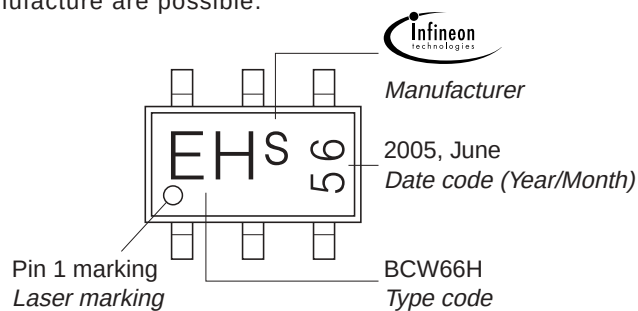

## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

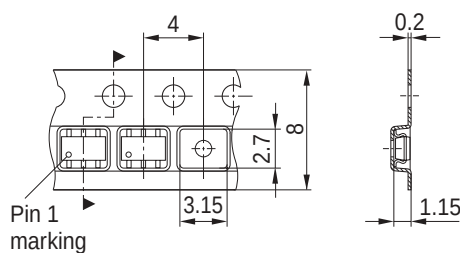




Technical drawing of a shaft with a keyway. The drawing shows the following dimensions and tolerances:

- Overall length:  $2.4 \pm 0.15$
- Keyway depth:  $0.15 \text{ MIN.}$
- Keyway width:  $1 \pm 0.1$
- Keyway height:  $0.1 \text{ MAX.}$
- Keyway angle:  $10^\circ \text{ MAX.}$
- Keyway radius:  $0.08 \dots 0.15$
- Keyway chamfer:  $0 \dots 8^\circ$
- Keyway position:  $1.3 \pm 0.1$
- Keyway feature control:  $\text{A}$


Technical drawing of a mechanical part showing two views. The top view is a rectangle with a width of 0.8 and a height of 0.9. The bottom view shows a stepped profile with a total width of 0.8, a central section of width 1.2, and a right section of width 0.9. The height of the central section is 1.3, and the height of the right section is 0.9.

The diagram shows a rectangular LED package with four pins. The top pin is labeled 'Manufacturer' with the Infineon logo. The bottom-left pin is labeled 'Pin 1'. The bottom-right pin is labeled 'BCW66' and 'Type code'. The package body contains the text 'EHS' and a date code '05 06' (representing 2005, June), which is labeled 'Date code (YM)'.


## Package Outline

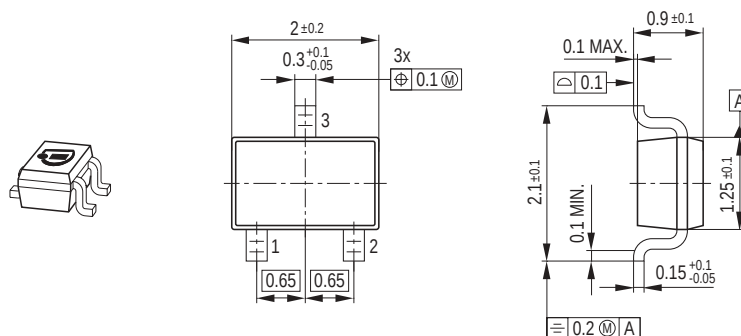

## Foot Print




## Marking Layout (Example)

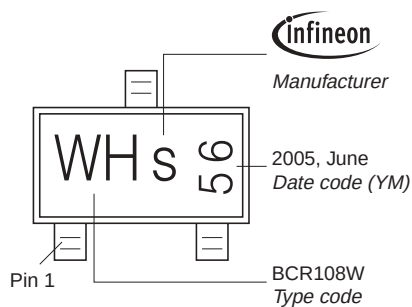


## Standard Packing


Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
 Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

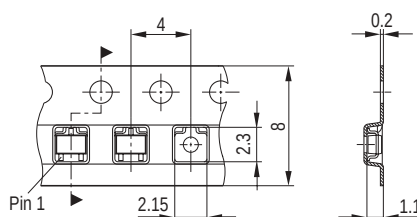


## Package Outline

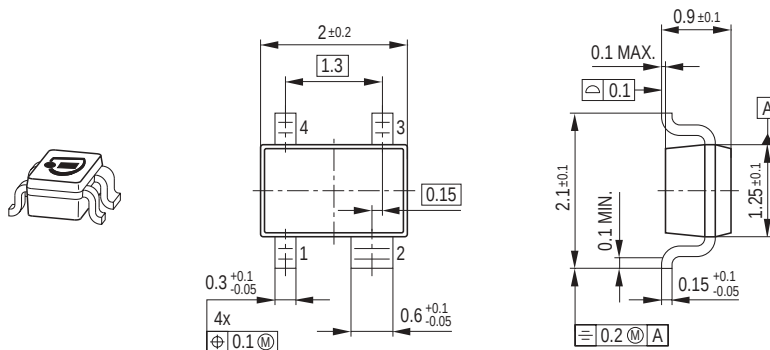

## Foot Print




## Marking Layout (Example)

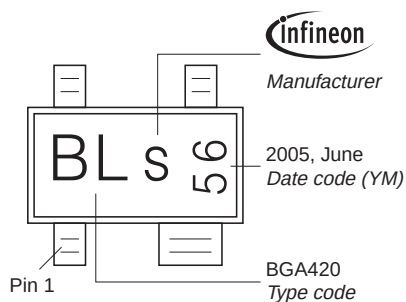


## Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø330 mm = 10.000 Pieces/Reel

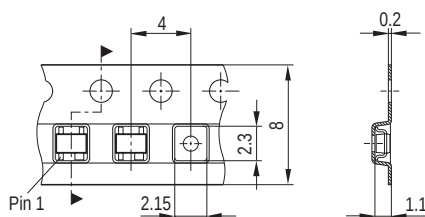

## Package Outline

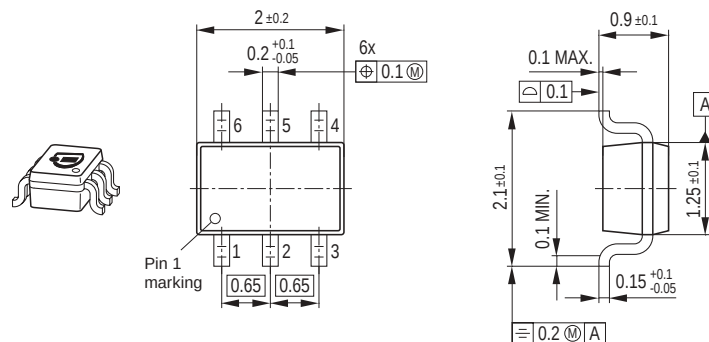


## Foot Print



## Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

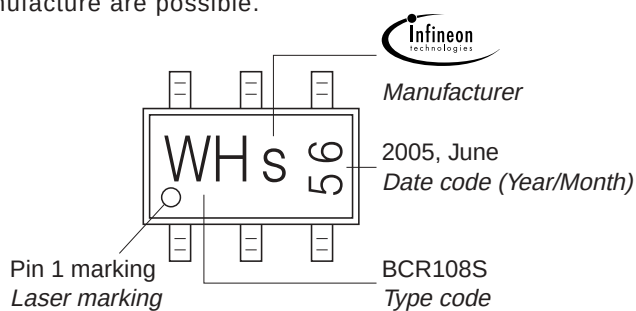

## Standard Packing

Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

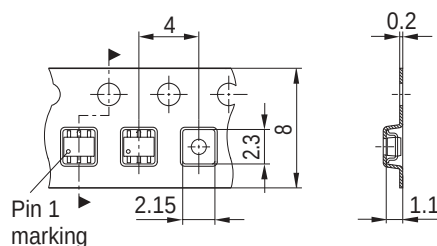

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Infineon:

[BAV 99S E6327](#) [BAV 99U E6327](#) [BAV 99S H6327](#) [BAV 99S H6433](#) [BAV 99W H6327](#) [BAV 99S H6827](#) [BCR 191W](#)  
[E6327](#) [BAV 99S E6433](#) [BAV 99 B5000](#) [BAV 99 B5003](#) [BAV 99 E6327](#) [BAV 99 E6433](#) [BAV 99W E6327](#) [BAV 99W](#)  
[E6433](#) [BAV99SH6433XTMA1](#) [BAV99SH6327XT](#) [SP000754046](#)