

MAXIM

CMOS Analog Switches

General Description

Maxim's DG304-DG307 and DG304A-DG307A CMOS dual and quad analog switches combine low power operation with fast switching times and superior DC and AC switch characteristics. On resistance is less than 50Ω and is essentially constant over the analog signal range. Device specifications are ideal for battery powered circuitry.

These switches are available in a variety of formats as outlined below in the Pin Configurations section. The switch control logic inputs are compatible with CMOS logic. Also featured are "break-before-make" switching and low charge injection.

Maxim's DG304-DG307 and DG304A-DG307A families are electrically compatible and pin compatible with the original manufacturer's devices. All devices will operate with power supplies ranging from $\pm 5V$ to $\pm 18V$. Single supply operation is implemented by connecting V^- to GND.

Applications

Portable Instruments
Low Power Sample/Holds
Power Supply Switching
Programmable Gain Amplifiers
SPDT and DPDT Functions
Process Control and Telemetry

Features


- ◆ Monolithic Low Power CMOS
- ◆ Latch-Up Proof Construction
- ◆ Fully Compatible 2nd Source
- ◆ Low On Resistance, $<50\Omega$
- ◆ Fast Switching Time
- ◆ V^+ to V^- Analog Signal Range
- ◆ Single Supply Capability

Ordering Information

PART	TEMP. RANGE	PACKAGE
DG304C/D	0°C to $+70^\circ\text{C}$	Dice
DG304CJ	0°C to $+70^\circ\text{C}$	14 Lead Plastic DIP
DG304CWE	0°C to $+70^\circ\text{C}$	16 Lead Wide SO
DG304CK	0°C to $+70^\circ\text{C}$	14 Lead CERDIP
DG304BWE	-25°C to $+85^\circ\text{C}$	16 Lead Wide SO
DG304BK	-25°C to $+85^\circ\text{C}$	14 Lead CERDIP
DG304BA	-25°C to $+85^\circ\text{C}$	10 Lead Metal Can
DG304AK	-55°C to $+125^\circ\text{C}$	14 Lead CERDIP
DG304AA	-55°C to $+125^\circ\text{C}$	10 Lead Metal Can

Ordering Information continued at end of data sheet.

Pin Configurations

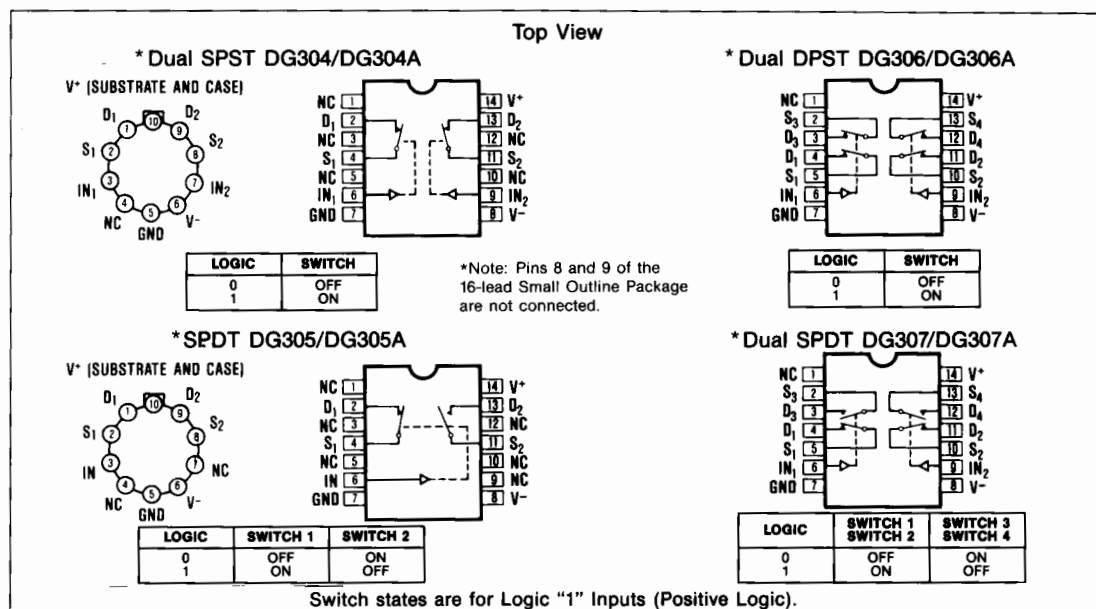

DG304(A)/DG305(A)/DG306(A)/DG307(A)

CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to V ⁻		Operating Temperature (A Suffix)	-55°C to 125°C
V ⁺ (DG304-DG307)	36V	(B Suffix)	-25°C to 85°C
V ⁺ (DG304A-DG307A)	44V	(C Suffix)	0°C to 70°C
GND	25V	Lead Temperature (Soldering 10 sec.)	+300°C
Digital Inputs, V _S , V _D (Note 1)	-4V to (V ⁺ + 4V) or 30mA, whichever occurs first.	Power Dissipation*	
Current, Any Terminal Except S or D	30mA	Cerdip (K) (Derate 11mW/°C above 75°C)	825mW
Continuous Current, S or D	30mA	Plastic DIP (J) (Derate 6.5mW/°C above 25°C)	470mW
(Pulsed at 1msec, 10% duty cycle max)	100mA	Metal Can (A) (Derate 6mW/°C above 75°C)	450mW
Storage Temperature (A & B Suffix)	-65°C to 150°C		
(C Suffix)	-65°C to 125°C		

* Device mounted with all leads soldered or welded to PC board.

Stresses listed under "Absolute Maximum Ratings" may be applied (one at a time) to devices without resulting in permanent damage. These are stress ratings only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS (V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = 25°C, unless otherwise indicated)

	PARAMETER	SYMBOL	TEST CONDITIONS	DG304-DG307A DG304A-DG307AA			DG304-DG307B/C DG304A-DG307AB/C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
				(Note 2)	(Note 3)		(Note 2)	(Note 3)		
SWITCH	Analog Signal Range	V _{ANALOG}	I _S = 10mA, V _{in} = 3.5V or 11.0V	-15		15	-15		15	V
	Drain-Source ON Resistance	r _{DS(on)}	I _S = -10mA, V _D = 10V		30	50		30	50	Ω
			I _S = 10mA, V _D = -10V		30	50		30	50	
	Source OFF Leakage Current	I _{S(off)}	V _{in} = 3.5V or V _{in} = 11.0V		0.1	1		0.1	5	nA
			V _S = 14V, V _D = -14V		0.1	1		0.1	5	
	Drain OFF Leakage Current	I _{D(off)}	V _S = -14V, V _D = 14V	-1	-0.1		-5	-0.1		
			V _S = -14V, V _D = 14V		0.1	1		0.1	5	
INPUT	Drain ON Leakage Current	I _{D(on)}	V _D = V _S = 14V	-1	-0.1		-5	-0.1		μA
			V _D = V _S = -14V	-2	-0.1		-5	-0.1		
	Input Current/Voltage High	I _{INH}	V _{in} = 5.0V	-1	-0.001		-1	-0.001		
			V _{in} = 15V		0.001	1		0.001	1	
DYNAMIC	Input Current/Voltage Low	I _{INL}	V _{in} = 0V	-1	-0.001		-1	-0.001		ns
	Turn-ON Time	t _{on}	See Switching Time Test Circuit		110	250		110	250	
	Turn-OFF Time	t _{off}			70	150		70	150	
	Break-Before-Make Interval	t _{on} -t _{off}	See Break-Before-Make Time Test Circuit DG305(A)/DG307(A) Only		50			50		
	Charge Injection	Q	C _L = 10nF, R _{gen} = 0Ω, V _{gen} = 0V		12			12		pC
	Source OFF Capacitance	C _{S(off)}	f = 1MHz, V _{in} = 3.5V or V _{in} = 11.0V		14			14		pF
	Drain OFF Capacitance	C _{D(off)}	V _S = 0V		14			14		
	Channel-ON Capacitance	C _{D(on)} + C _{S(on)}	V _D = 0V		40			40		
			V _S = V _D = 0V		6			6		
	Input Capacitance	C _{in}	f = 1MHz		7			7		dB
	Off Isolation (Note 4)		V _{in} = 0V, R _L = 1kΩ		62			62		
	Crosstalk (Channel to Channel)		V _S = 1 V _{RMS} , f = 500kHz		74			74		

(See Notes next page).

CMOS Analog Switches

ELECTRICAL CHARACTERISTICS (Continued)

(V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = 25°C, unless otherwise indicated)

	PARAMETER	SYMBOL	TEST CONDITIONS	DG304-DG307A DG304A-DG307AA			DG304-DG307B/C DG304A-DG307AB/C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
SUPPLY	Positive Supply Current	I ⁺	V _{in} = 15.0V (All Inputs)	0.001 10			0.001 10			μA
	Negative Supply Current	I ⁻		-10 -0.001			-10 -0.001			
	Positive Supply Current	I ⁺	V _{in} = 0V (All Inputs)	0.001 10			0.001 10			
	Negative Supply Current	I ⁻		-10 -0.001			-10 -0.001			

ELECTRICAL CHARACTERISTICS (Over Temperature)

(V⁺ = +15V, GND = 0V, T_A = Over Temperature Range, unless otherwise noted)

	PARAMETER	SYMBOL	TEST CONDITIONS		DG304-DG307A DG304A-DG307AA		DG304-DG307B/C DG304A-DG307AB/C		UNITS		
					MIN (Note 2)	TYP (Note 3)	MAX	MIN (Note 2)		TYP (Note 3)	MAX
SWITCH	Analog Signal Range	V _{ANALOG}	I _S = 10mA, V _{in} = 3.5V or 11.0V		-15		15	-15		15	V
	Drain-Source ON Resistance	r _{DS(on)}	V _{in} = 3.5V or V _{in} = 11.0V	I _S = -10mA, V _D = 10V			75			75	Ω
		I _S = 10mA, V _D = -10V				75		75			
	Source OFF Leakage Current	I _{S(off)}		V _S = 14V, V _D = -14V			100		100	nA	
	Drain OFF Leakage Current	I _{D(off)}		V _S = -14V, V _D = 14V	-100		-100		100		
				V _S = -14V, V _D = 14V			100		100		
				V _S = 14V, V _D = -14V	-100		-100				
	Drain ON Leakage Current	I _{D(on)}		V _D = V _S = 14V			100		100		
		V _D = V _S = -14V	-200		-200						
INPUT	Input Current/ Voltage High	I _{INH}	V _{in} = 5.0V		-1		-10			μA	
			V _{in} = 15V				1		10		
	Input Current/ Voltage Low	I _{INL}	V _{in} = 0V		-1		-10				
SUPPLY	Positive Supply Current	I ⁺	V _{in} = 15.0V (All Inputs)		100		200		μA		
	Negative Supply Current	I ⁻			-100		-200				
	Positive Supply Current	I ⁺	V _{in} = 0V (All Inputs)		100		200				
	Negative Supply Current	I ⁻			-100		-200				

Note 1: Signals on S_X, D_X, or I_{NX} exceeding V⁺ or V⁻ will be clamped by internal diodes. Limit diode forward current to maximum current ratings.


Note 2: The algebraic convention whereby the most negative value is a minimum, and the most positive value is a maximum is used in this data sheet.

Note 3: Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

Note 4: OFF isolation = $20 \log \frac{V_S}{V_D}$, V_S = input to OFF switch, V_D = Output.

CMOS Analog Switches

Typical Operating Characteristics

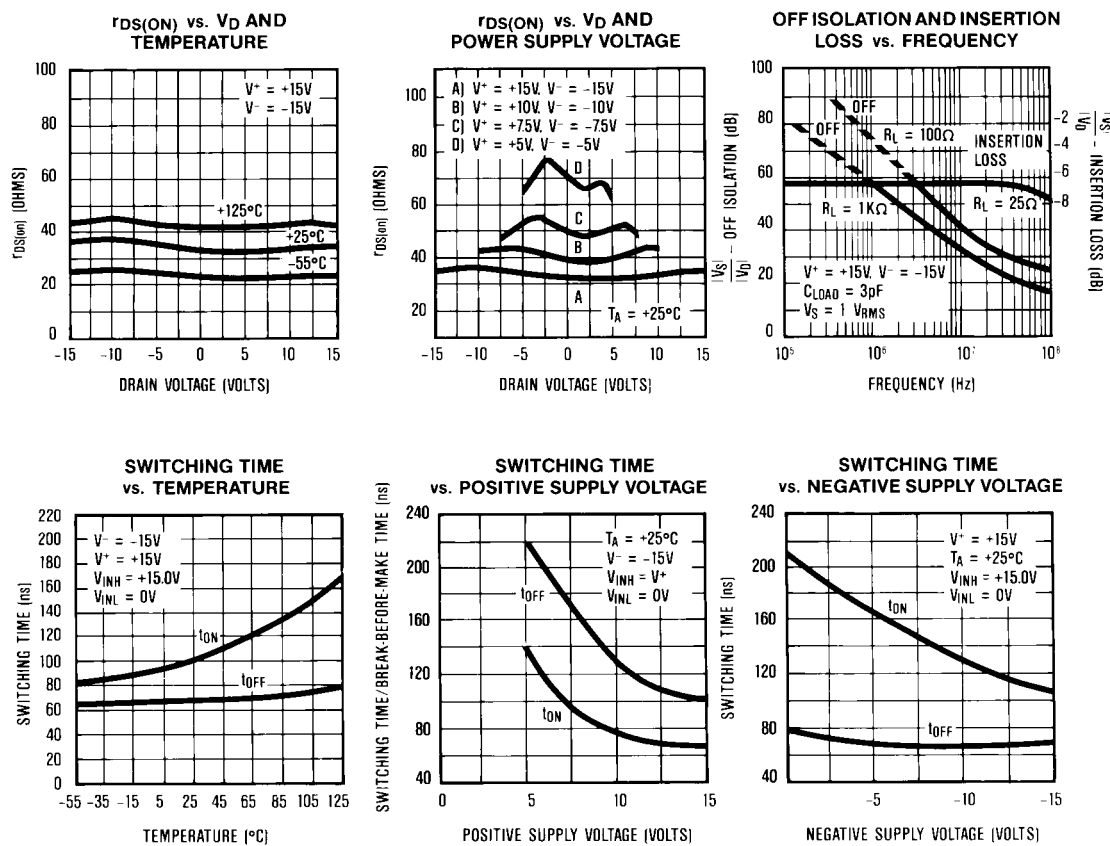

Test Circuits

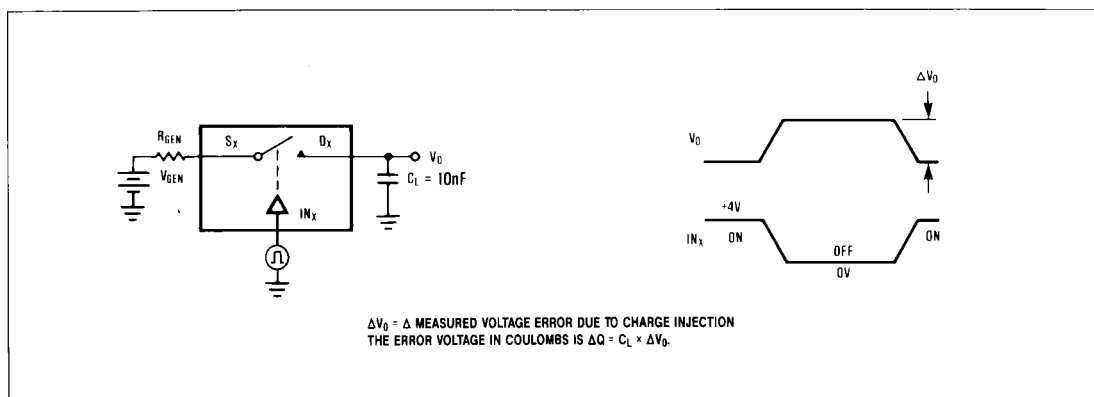


Figure 1. Charge Injection Test Circuit.

CMOS Analog Switches

Test Circuits (Continued)

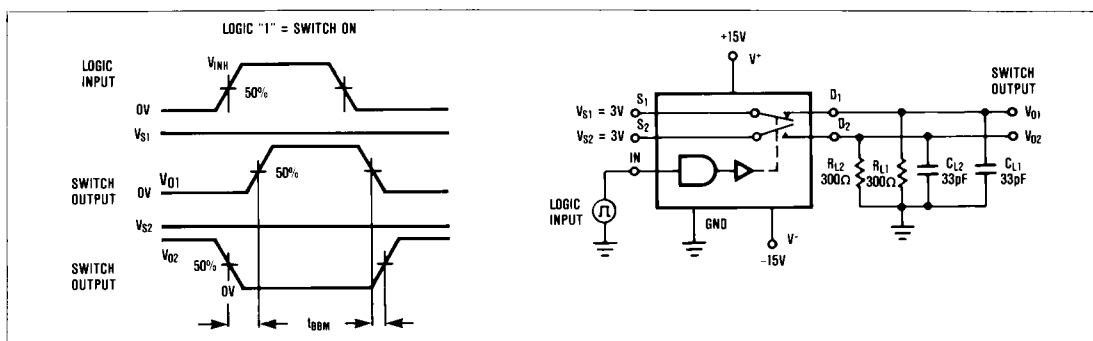


Figure 2. Break-Before-Make Time Test Circuit SPDT DG305(A), DG307(A).

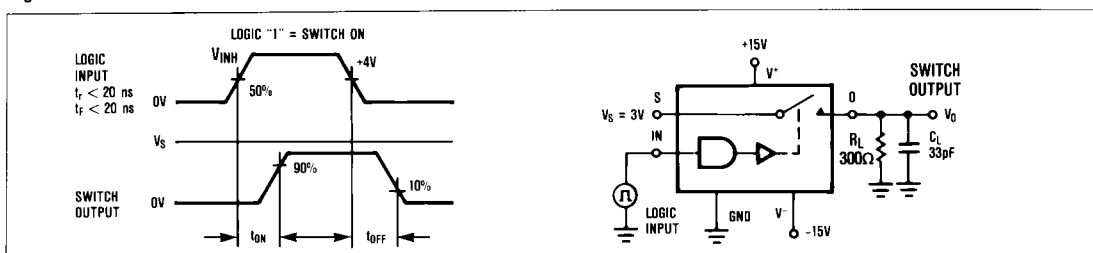


Figure 3. Switching Time Test Circuit.

Application Information

All DG304 family switches will operate with ± 15 V power supplies. They can also be used with single ended power supplies ranging from +10V to +30V where the V^- terminal is connected to ground. In either case analog signals ranging from V^+ to V^- can be switched.

The on resistance variation with analog signal and supply voltage is shown in the Typical Operating Characteristics graphs. The temperature coefficient of R_{ON} is typically 0.5%/°C. Typical on resistance matching from channel to channel is 10%. In addition, Table 1 outlines some typical parameters for single supply operation.

Table 1. Typical Single Supply Parameters

	V ⁺ SUPPLY VOLTAGE (V ⁻ = 0V)			
	+10V	+15V	+20V	+30V
Switching Time ($R_L = 1k\Omega$)				
t_{ON}	220ns	180ns	165ns	110ns
t_{OFF}	60ns	40ns	30ns	20ns
On Resistance				
$V_{SIGNAL} = +1V$	71Ω	51Ω	42Ω	31Ω
$V_{SIGNAL} = V^+/2$	77Ω	54Ω	43Ω	30Ω
$V_{SIGNAL} = V^+$	84Ω	63Ω	54Ω	43Ω
Input Logic Levels	3.5V, 11.0V	3.5V, 11.0V	3.5V, 12.5V	3.5V, 22.0V

The charge injection test circuit is shown in Figure 1. Table 2 lists the typical injected charge for DG304 series switches with various input voltages.

Table 2. Charge Injection (± 15 V Supplies)

ANALOG INPUT	INJECTED Q
+10V	4pC
+5V	8pC
0V	12pC
-5V	8pC
-10V	5pC

CMOS Analog Switches

Ordering Information (continued)

DG304(A)/DG305(A)/DG306(A)/DG307(A)

PART	TEMP. RANGE	PACKAGE
DG304AC/D	0°C to +70°C	Dice
DG304ACJ	0°C to +70°C	14 Lead Plastic DIP
DG304ACWE	0°C to +70°C	16 Lead Wide SO
DG304ACK	0°C to +70°C	14 Lead Cerdip
DG304ABWE	-25°C to +85°C	16 Lead Wide SO
DG304ABK	-25°C to +85°C	14 Lead Cerdip
DG304ABA	-25°C to +85°C	10 Lead Metal Can
DG305C/D	0°C to +70°C	Dice
DG305CJ	0°C to +70°C	14 Lead Plastic DIP
DG305CWE	0°C to +70°C	16 Lead Wide SO
DG305CK	0°C to +70°C	14 Lead Cerdip
DG305BWE	-25°C to +85°C	16 Lead Wide SO
DG305BK	-25°C to +85°C	14 Lead Cerdip
DG305BA	-25°C to +85°C	10 Lead Metal Can
DG305AK	-55°C to +125°C	14 Lead Cerdip
DG305AA	-55°C to +125°C	10 Lead Metal Can
DG305AC/D	0°C to +70°C	Dice
DG305ACJ	0°C to +70°C	14 Lead Plastic DIP
DG305ACWE	0°C to +70°C	16 Lead Wide SO
DG305ACK	0°C to +70°C	14 Lead Cerdip
DG305ABWE	-25°C to +85°C	16 Lead Wide SO
DG305ABK	-25°C to +85°C	14 Lead Cerdip
DG305ABA	-25°C to +85°C	10 Lead Metal Can


PART	TEMP. RANGE	PACKAGE
DG306C/D	0°C to +70°C	Dice
DG306CJ	0°C to +70°C	14 Lead Plastic DIP
DG306CWE	0°C to +70°C	16 Lead Wide SO
DG306CK	0°C to +70°C	14 Lead Cerdip
DG306BWE	-25°C to +85°C	16 Lead Wide SO
DG306BK	-25°C to +85°C	14 Lead Cerdip
DG306AK	-55°C to +125°C	14 Lead Cerdip
DG306AC/D	0°C to +70°C	Dice
DG306ACJ	0°C to +70°C	14 Lead Plastic DIP
DG306ACWE	0°C to +70°C	16 Lead Wide SO
DG306ACK	0°C to +70°C	14 Lead Cerdip
DG306ABWE	-25°C to +85°C	16 Lead Wide SO
DG306ABK	-25°C to +85°C	14 Lead Cerdip
DG307C/D	0°C to +70°C	Dice
DG307CJ	0°C to +70°C	14 Lead Plastic DIP
DG307CWE	0°C to +70°C	16 Lead Wide SO
DG307CK	0°C to +70°C	14 Lead Cerdip
DG307BWE	-25°C to +85°C	16 Lead Wide SO
DG307BK	-25°C to +85°C	14 Lead Cerdip
DG307AK	-55°C to +125°C	14 Lead Cerdip
DG307AC/D	0°C to +70°C	Dice
DG307ACJ	0°C to +70°C	14 Lead Plastic DIP
DG307ACWE	0°C to +70°C	16 Lead Wide SO
DG307ACK	0°C to +70°C	14 Lead Cerdip
DG307ABWE	-25°C to +85°C	16 Lead Wide SO
DG307ABK	-25°C to +85°C	14 Lead Cerdip

CMOS Analog Switches

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)


MAX304(A)/DG305(A)/DG306(A)/DG307(A)

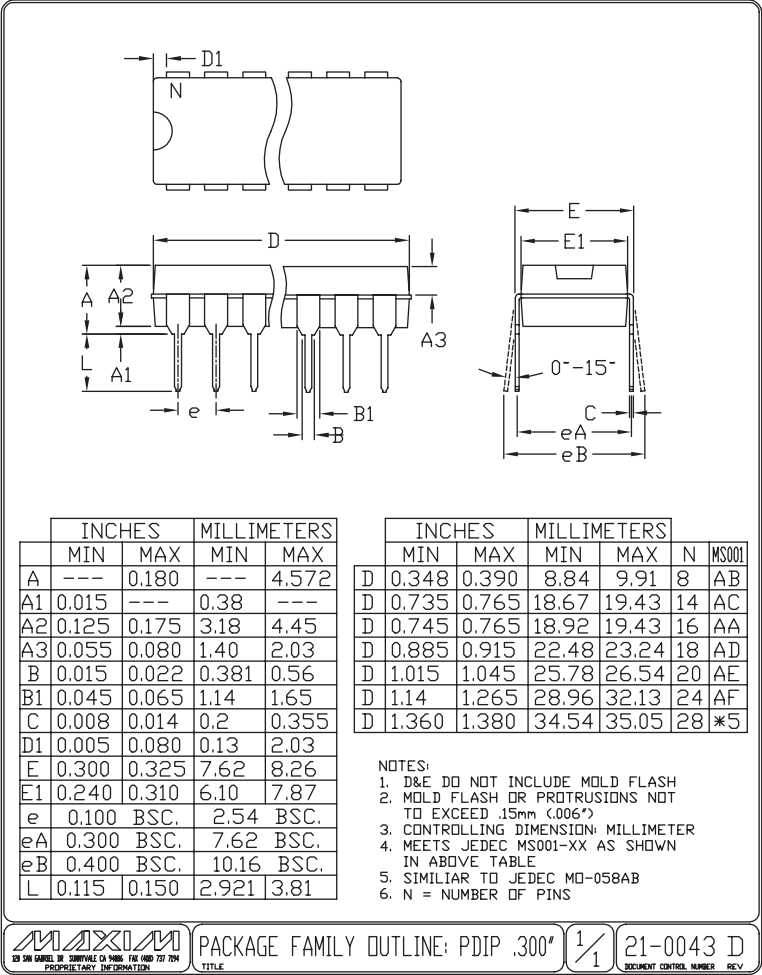

CMOS Analog Switches

Package Information (continued)


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

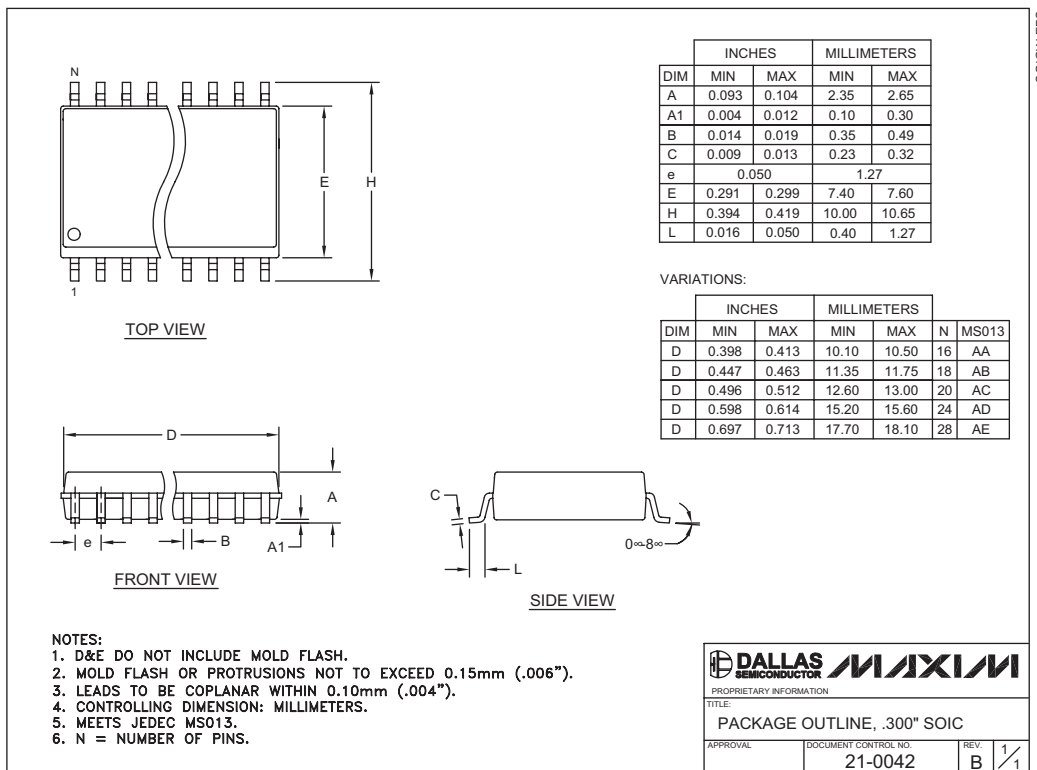

CMOS Analog Switches

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

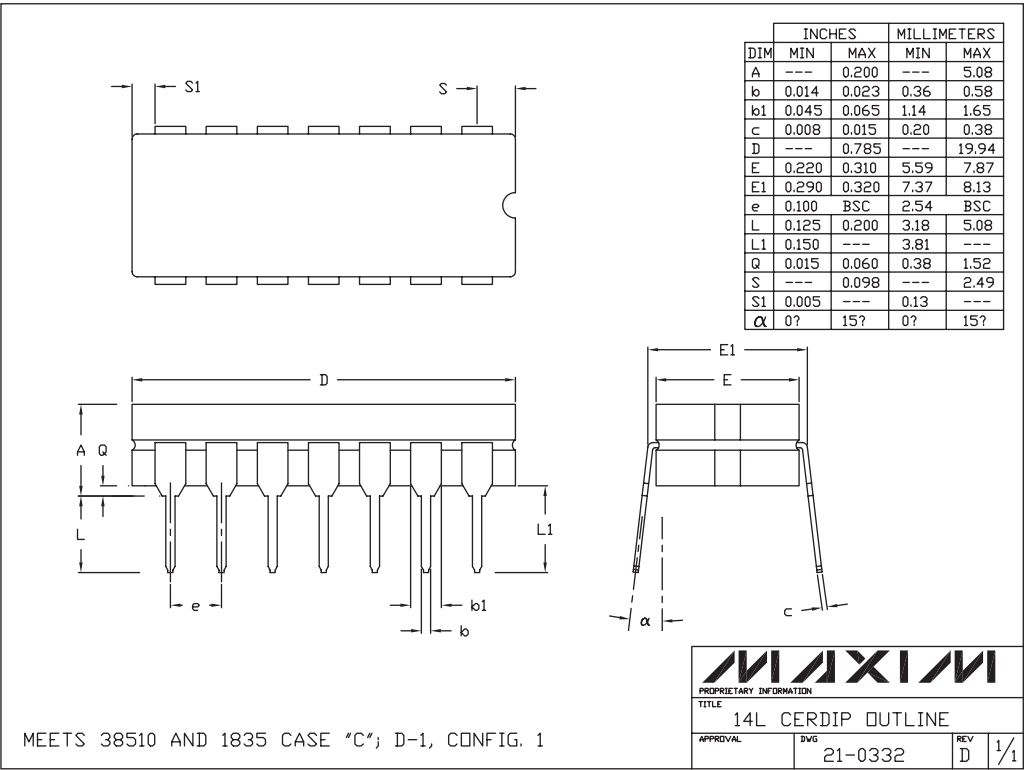

MAX304(A)/DG305(A)/DG306(A)/DG307(A)

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 9

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Maxim Integrated:

[DG306AAK/883B](#) [DG307AAK/883B](#) [DG304AAA/883B](#) [DG305AAA/883B](#) [DG304ACJ+](#) [DG305ACJ+](#) [DG305ACWE+](#)
[DG305ACWE+T](#) [DG306ACWE+T](#) [DG307ACJ+](#)