

Small Signal Product

Surface Mount, Switching Schottky Barrier Diode

FEATURES

- Low forward voltage drop
- Surface mount device type
- Moisture sensitivity level (MSL): 1
- Packing code with suffix "G" means green compound (halogen-free)



SOD-123



MECHANICAL DATA

- Case: Bend lead SOD-123 small outline plastic package
- Terminal: Matte tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- High temperature soldering guaranteed : 260°C/10s
- Polarity: Indicated by cathode band
- Weight: 0.01 g (approximately)



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)				
PARAMETER	SYMBOL	BAT42W	BAT43W	UNIT
Repetitive Peak Reverse Voltage	V _{RRM}	30		V
Working Peak Reverse Voltage	V _{RWM}			V
DC Blocking Voltage	V _R			
RMS Reverse Voltage	V _{R(RMS)}	21		V
Forward Continue Current (Note 1)	I _{FM}	200		mA
Repetitive Peak Forward Current @ t < 1.0s	I _{FM}	500		mA
Non-Repetitive Peak Forward Surge Current @ t < 1.0 ms	I _{FSM}	4		A
Repetitive Peak Forward Surge Current	I _{FRM}	500		mA
Power Dissipation (Note 1)	P _d	200		mW
Maximum Forward Voltage I _F =200mA I _F =2mA I _F =10mA I _F =15mA I _F =50mA	V _F	1.0		V
		-	0.33	
		0.40	-	
		-	0.45	
		0.65	-	
Peak Reverse Current @ V _R =25V & T _J =25°C	I _R	500		nA
Junction Capacitance V _R =1V, f=1.0MHz	C _J	10		pF
Reverse Recovery Time (Note 2)	T _{rr}	5		ns
Thermal Resistance Junction to Ambient Air (Note 1)	R _{θJA}	625		°C
Operating Temperature Range	T _J	-55 to +125		°C
Storage Temperature Range	T _{STG}	-55 to +125		°C

Notes: 1. Valid provided that terminals are kept at ambient temperature.

2. Reverse recovery test conditions : I_F=10mA, I_R=10mA, R_L=100Ω, I_{RR}=1mA

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Fig.1 Typical Forward Characteristics

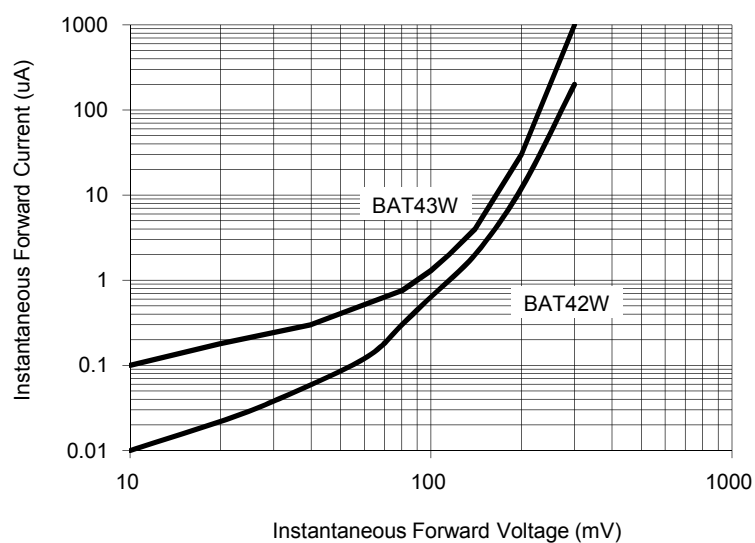


Fig. 2 Typical Forward Characteristics

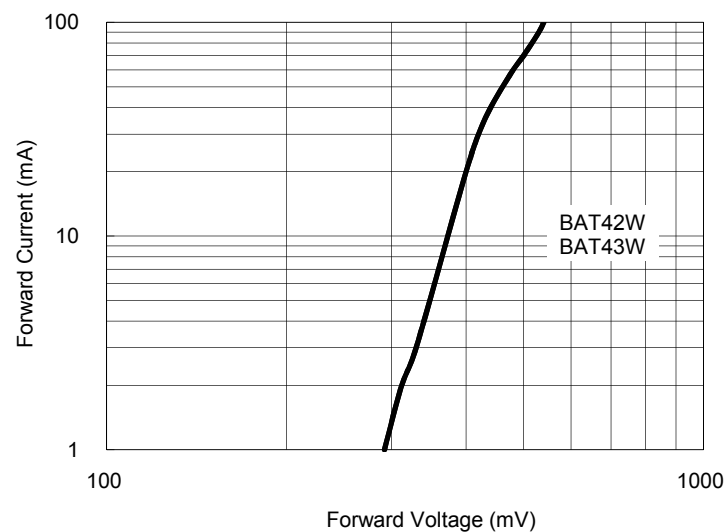


Fig. 3 Typical Reverse Characteristics


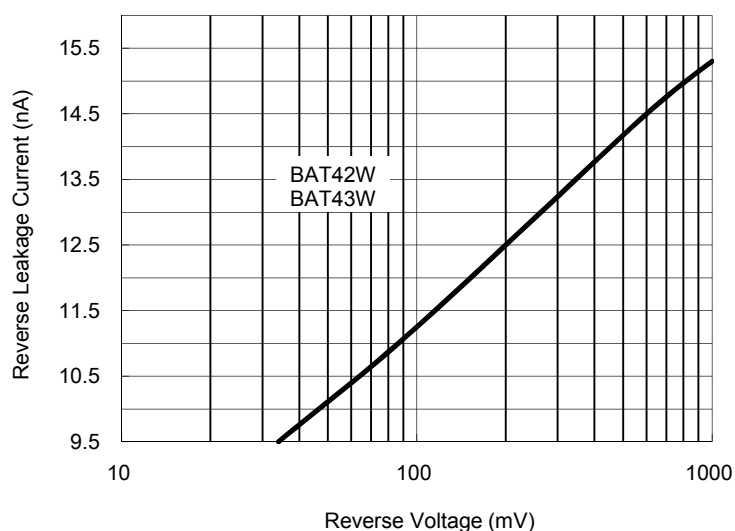


Fig. 4 Typical Reverse Characteristics

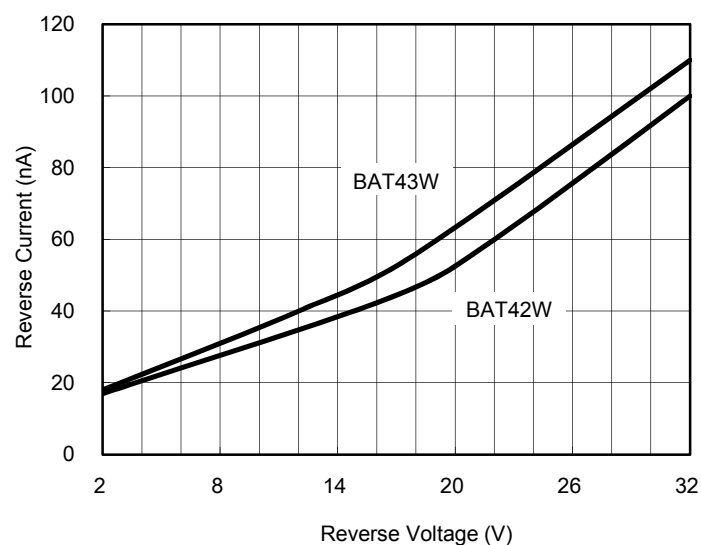

Small Signal Product

ORDERING INFORMATION					
PART NO.	PART NO. SUFFIX (Note 2)	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
BAT4xW (Note 1)	-xx	RP	G	SOD-123	3,000 / 7" Reel
		RF			


Note 1: "x" is Device Code from "2" thru "3".

Note 2: Part No. Suffix „-xx “ would be used for special requirement

EXAMPLE					
PREFERRED P/N	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
BAT42W RP	BAT42W		RP		Multiple manufacture source
BAT42W RPG	BAT42W		RP	G	Multiple manufacture source Green compound
BAT42W-M0 RPG	BAT42W	-M0	RP	G	Define manufacture source Green compound
BAT42W-D0 RFG	BAT42W	-D0	RF	G	Define manufacture source Green compound


Small Signal Product

PACKAGE OUTLINE DIMENSIONS

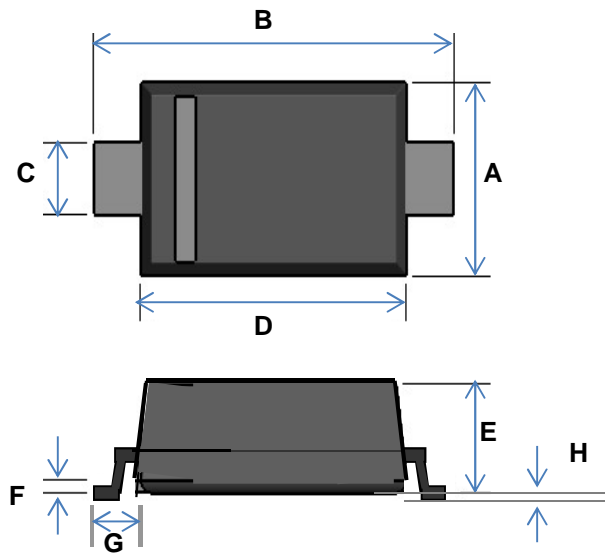

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.40	1.80	0.055	0.071
B	3.55	3.85	0.140	0.152
C	0.45	0.70	0.018	0.028
D	2.55	2.85	0.100	0.112
E	0.95	1.35	0.037	0.053
F	0.05	0.15	0.002	0.006
G	0.50 REF		0.02 REF	
H	-	0.10	-	0.004

SUGGEST PAD LAYOUT

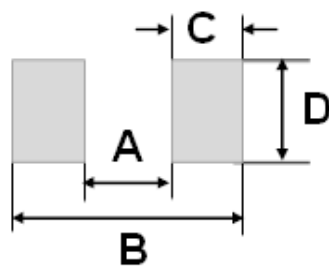

DIM.	Unit (mm)	Unit (inch)
	Typ.	Typ.
A	2.36	0.093
B	4.19	0.165
C	0.91	0.036
D	1.22	0.048

MARKING

Part No.	Marking
BAT42W	S7
BAT43W	S8

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[BAT43W](#)