



2 • ROW Strip Connectors Cable to Cable

.050"









MA-2

4 thru 128 Contacts

MA-231-016-161-A64WS



MA-241-016-261-A61WS

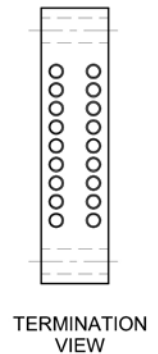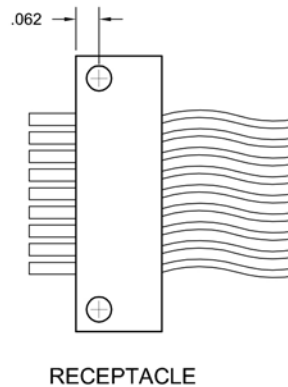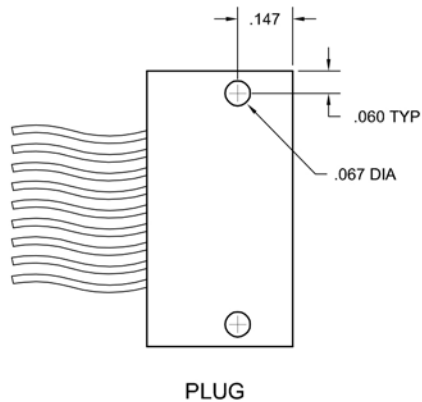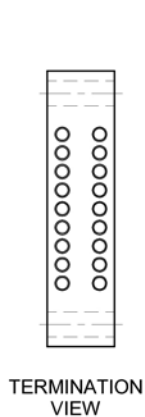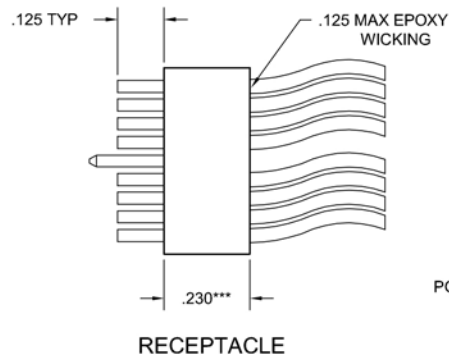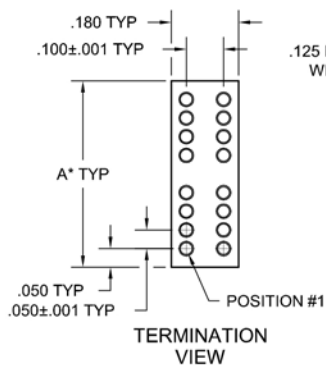

OPTIONAL MOUNTING HOLES

DIMENSIONS

To determine connector length (Dim "A"):

Multiply the number of cavities in one row by .050"

Add fixed end lengths (constant, .025" x 2)

Add .085" for each mounting hole

Total Length:

	0.05"

Notes:

Length over 2" may require support to insure alignment.

* = Maximum length is 3.420". Maximum number of contacts must be reduced to accommodate hardware and mounting holes.

** = For solder cup or board mount applications, .390" becomes .295"

*** = For solder cup or board mount applications, .230" becomes .135"