

Barrier Strip Filtered Terminal Blocks


The barrier strip filtered terminal block is designed to provide excellent EMI/RFI filtering of AC and DC power lines and control lines. This terminal block is available in various sizes, with terminals for soldering or spade lugs. Application examples include filtering power supplies in telecommunications equipment, metering, industrial controls, instrumentation and EDP equipment.

Features

- UL recognized and CSA approved for DC voltages
- E133076, UL 1059
- LR92537, CSA STD 22.2 N°158-1987 and ECN584B
- Filter element provides high insertion loss for EMI/RFI filtering of AC and DC power and control lines
- Rugged construction provides protection to filtering element; especially useful for repeated changes in wiring or field connections
- 2 to 6 terminals available (combine if larger number of terminals needed)
- Cost-effective solution for industrial interconnection EMI filtering problems
- Termination options available: straight lead, male or female disconnects, pigtail (12 AWG = 0.081" (2.05mm); 22 AWG = 0.025" (0.64mm))
- Available in RoHS compliant versions

Circuit Schematic

Pi Filter

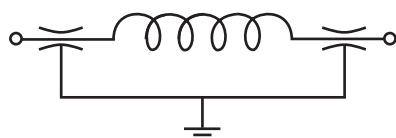

Ordering Information

Example: **52-160-006-A AOO**

The part number shown represents a barrier strip terminal block with six terminals and rated for 20 Amps. Male disconnects (.250") are the method of termination.

52 * **160** - **006** - **A**

Barrier Strip Terminal Block
160 - Front panel mount
188 - Rear panel mount

Number of Terminals
002 - 2 terminals through
006 - 6 terminals

Current Rating
A - 20 Amps

For instructions on soldering to filter terminals, please refer to page FA4 in filter plate section.

* Replace “-” with “F” for RoHS complaint version



Mechanical Specifications

Center Spacing.....438" (11.1 mm)

Wire Size.....AWG #12 max for 20A

Screw Size 20A - #6-32, zinc-plated
philslot screws

Molded Material. Black, UL rated 94VO thermoplastic

Tightening Torque 9 in.-lbs. max.

Terminal Brass, tin-plated

Electrical Specifications

Operating Temperature . . -55° C to 105° C

Working Voltage..... 100VDC

Capacitance 2,500 pF to 5,200 pF

Dielectric

Withstanding Voltage . . . 1700VDC

Current Rating..... 20A

D.C. Resistance01 ohms max.

Typical Loss (dB) In 50 Ohm Circuit

Frequency	Insertion Loss (dB)
30 MHz	22
50 MHz	32
100 MHz	48
300 MHz	70
500 MHz	75
1000 MHz	75

AOO

Dimensions
in inches (*mm*)

Special Terminations Code
Note: Leave blank if ordering standard product.



Male quick disconnects
directly on terminal block.

AO1187 (4.8)
AOO250 (6.4)

For custom designs see page FA18
and consult with factory.

Barrier Strip Filtered Terminal Blocks

Front panel mount

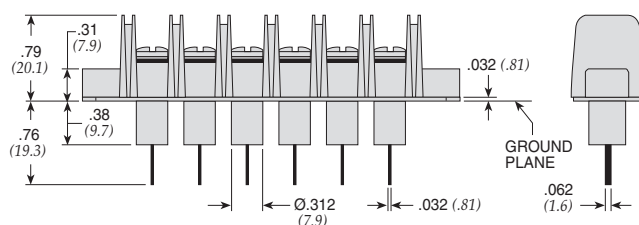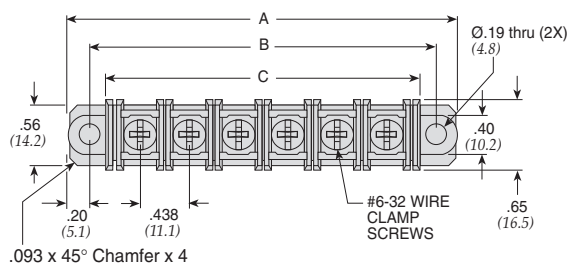



20 Amps

Dimensions in inches (*mm*)

Part Number	Number of Circuits	A in. (mm)	B in. (mm)	C in. (mm)
€ 52-160-002-A	2	1.71 (43.4)	1.31 (33.3)	1.02 (25.9)
52-160-003-A	3	2.15 (54.6)	1.75 (44.5)	1.46 (37.1)
52-160-004-A	4	2.59 (65.8)	2.19 (55.6)	1.90 (48.3)
52-160-005-A	5	3.02 (76.7)	2.62 (66.5)	2.32 (58.9)
52-160-006-A	6	3.46 (87.9)	3.06 (77.7)	2.77 (70.4)

€ Also available through API's authorized European distributors/agents.

Rear panel mount

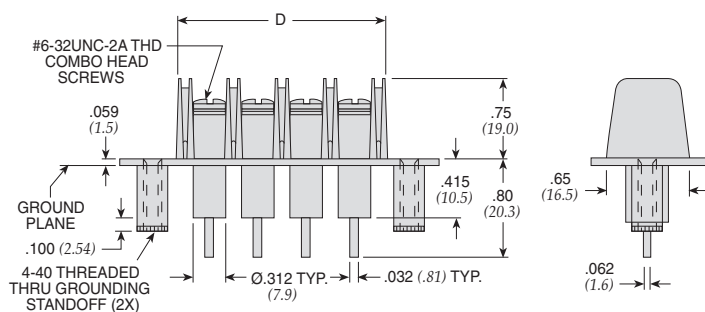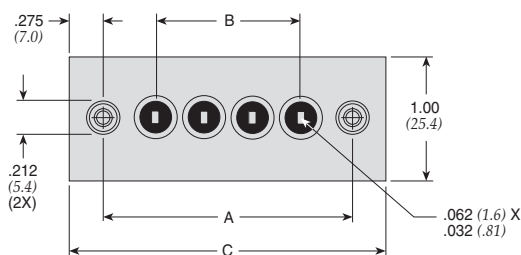

20 Amps

Dimensions in inches (*mm*)

Part Number	Number of Circuits	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)
52-188-002-A	2	1.31 (33.3)	.438 (11.1)	1.86 (47.3)	1.02 (25.9)
52-188-003-A	3	1.75 (44.4)	.875 (22.2)	2.30 (58.4)	1.46 (37.1)
52-188-004-A	4	2.19 (55.6)	1.313 (33.3)	2.74 (69.5)	1.90 (48.3)
52-188-005-A	5	2.62 (66.6)	1.750 (44.4)	3.17 (80.6)	2.32 (58.9)
52-188-006-A	6	3.06 (77.7)	2.188 (55.6)	3.61 (91.7)	2.77 (70.4)