




L2610CV

LOW DROPOUT VOLTAGE REGULATOR

- OUTPUT VOLTAGE OF 10V
- OUTPUT CURRENT UP TO 500 mA
- NO EXTERNAL COMPONENTS
- LOW DROP OUT VOLTAGE
- OVERVOLTAGE PROTECTION ($\pm 100V$)
- REVERSE VOLTAGE PROTECTION
- SHORT CIRCUIT PROTECTION
- CURRENT LIMITING
- THERMAL SHUTDOWN



TO-220


ORDERING NUMBER: L2610CV

DESCRIPTION


The L2610CV three terminal positive regulator is specially designed to stabilize power supplies car instrumentation in vehicles with 12V battery. Available with 10V output voltage, it can supply an output current to 500mA.

This device is protected against load dump and field decay transients ($\pm 100V$), reverse battery, short circuit and thermal overload.

BLOCK DIAGRAM

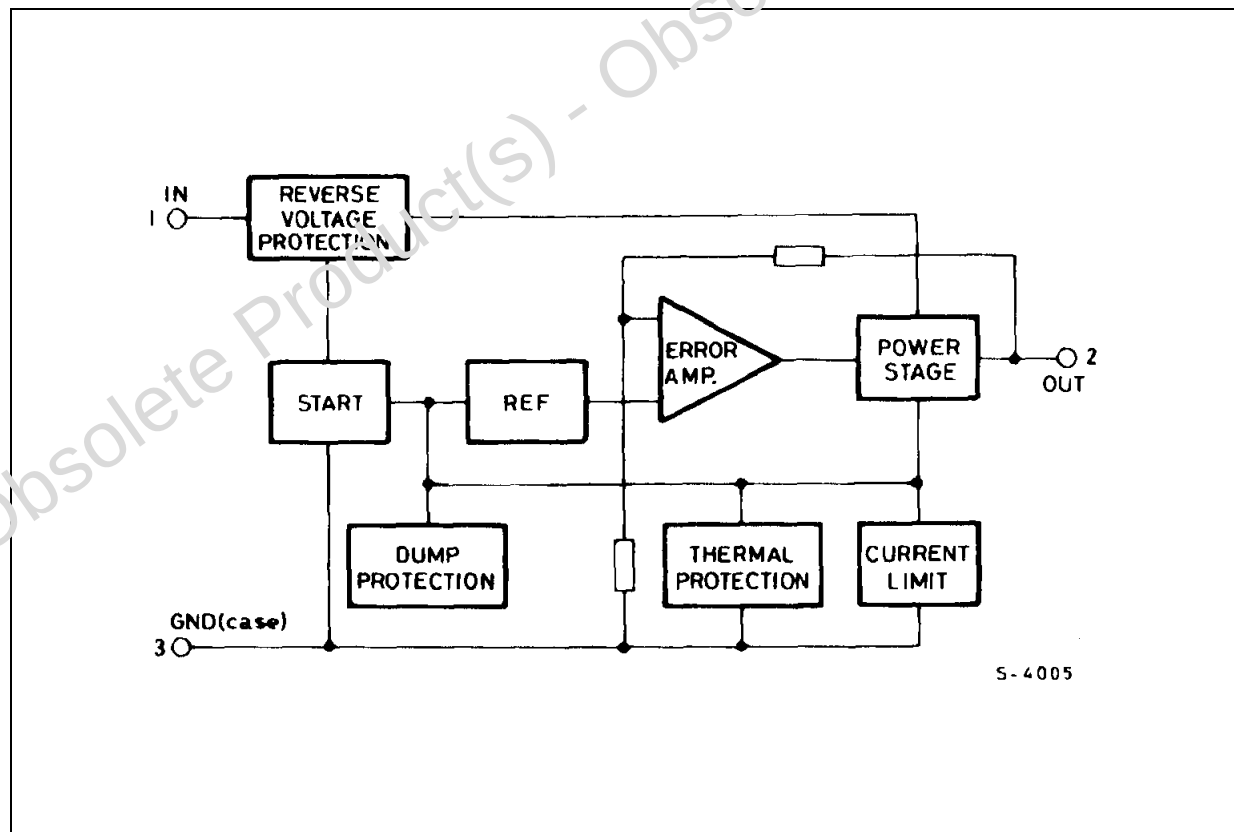

PIN CONNECTION (Top view)

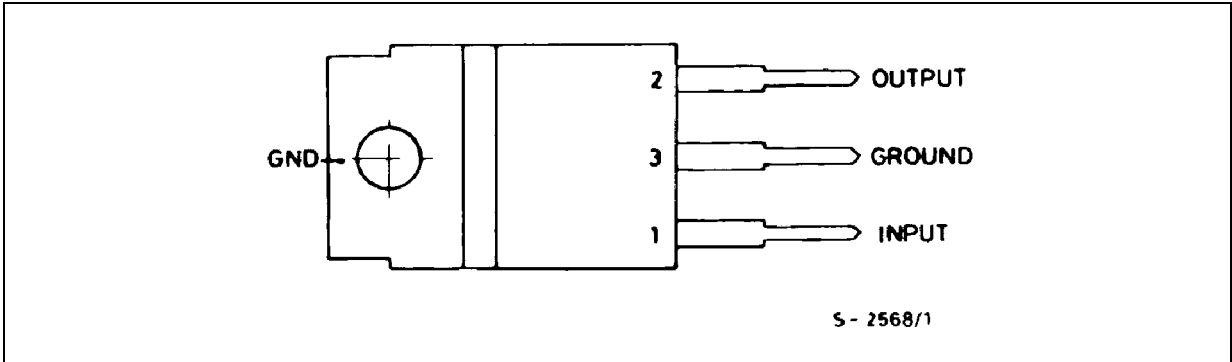


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
	DC Input Voltage	35	V
	DC Input Reverse Voltage	-28	V
	Transient Input Overvoltage:		
	Load Dump:	+100	V
	5ms ≤ t _{rise} ≤ 10ms		
	τ _f Fall Time Costant = 100ms,		
	R _{source} ≥ 0.5 Ω		
	Field Decay:	-100	V
	5ms ≤ t _{fall} ≤ 10ms		
	τ _r Rise Time Costant = 33ms,		
	R _{source} ≥ 10Ω		
P _D	Power Dissipation	internally Limited	
T _j , T _{stg}	Junction and Storage Temperature Range	-55 to 150	°C

THERMAL DATA

Symbol	Parameter	Value	Unit
R _{th-j-case}	Thermal resistance junction-case	Max 4	°C/W
R _{th-j-amb}	Thermal resistance junction-ambient	Max 75	°C/W

APPLICATION CIRCUIT

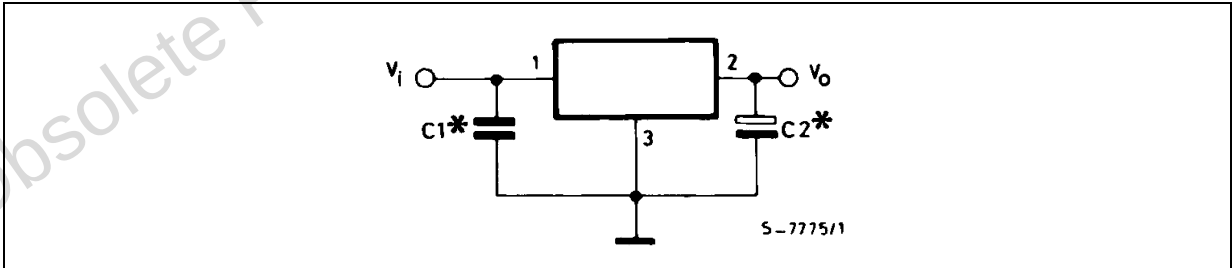

(*) **Note** : C1 and C2 are only needed if the load capacitance exceeds 1000 pF, Recommended values are C1 = 0.1 μF and C2 ≥100 μF.

ELECTRICAL CHARACTERISTICS ($T_j = 25\text{ }^{\circ}\text{C}$, $V_i = 14\text{ V}$, unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$I_o = 500\text{ mA}$, $V_i = 12\text{ to }16\text{ V}$	9.60	10.00	10.40	V
V_i	Operating Input	See Note (*)			28	V
$\frac{\Delta V_o}{V_o}$	Line Regulation	$I_o = 50\text{ mA}$; $V_i = 12\text{ to }20\text{ V}$		2	8	mV/V
	Load Regulation	$V_i = 14\text{ V}$; $I_o = 50\text{ to }500\text{ mA}$		4	9	mV/V
ΔV_{i-o}	Dropout Voltage	$I_o = 500\text{ mA}$			1.9	V
I_d	Quiescent Current	$I_o = 50\text{ mA}$		20	45	mA
$\frac{\Delta V_o}{\Delta T}$	Output Voltage Drift	$I_o = 50\text{ mA}$ $V_i = 14\text{ V}$; $T_{amb} = -12\text{ to }80\text{ }^{\circ}\text{C}$		- 1		mV/ $^{\circ}\text{C}$
I_{sc}	Output Short Circuit Current			1.1	1.8	A
SVR	Supply Voltage Rejection	$V_i = 16\text{ V}$; $V_i = 2\text{ V}$ $f = 100\text{ Hz}$; $I_o = 500\text{ mA}$		60		dB
R_o	Output Resistance	$I_o = 500\text{ mA}$		0.05		Ω
e_N	Output Noise Voltage	BW = 100 Hz to 10 KHz		20		μV

(*) **Note:** For DC input voltage $28\text{ V} < V_i < 35\text{ V}$ the device is not operating

ELECTRICAL CHARACTERISTICS ($-40 \leq T_j \leq 125\text{ }^{\circ}\text{C}$ (note 2), $V_i = 14\text{ V}$, unless otherwise specified)


Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V_o	Output Voltage	$I_o = 500\text{ mA}$, $V_i = 12\text{ to }16\text{ V}$	9.40	10.00	10.60	V
V_i	Operating Input	See Note (1)			26	V
$\frac{\Delta V_o}{V_o}$	Line Regulation	$I_o = 50\text{ mA}$; $V_i = 12.5\text{ to }20\text{ V}$		3	12	mV/V
	Load Regulation	$V_i = 14\text{ V}$; $I_o = 50\text{ to }500\text{ mA}$	5	13		mV/V
ΔV_{i-o}	Dropout Voltage	$I_o = 500\text{ mA}$			2.5	V
I_d	Quiescent Current	$I_o = 50\text{ mA}$		29	65	mA
I_{sc}	Output Short Circuit Current			1.1	2.1	A

Notes: 1. For a DC input voltage $26\text{ V} < V_i < 35\text{ V}$ the device is not operating.


2. The limits are guaranteed by design correlation and statistical control on production samples over the indicated temperature and supply voltage ranges.

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.40		2.70	0.094		0.106
H2	10.0		10.4	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.20		6.60	0.244		0.260
L9	3.50		3.93	0.137		0.154
M		2.6			0.102	
Dia	3.75		3.85	0.147		0.151

OUTLINE AND
MECHANICAL DATA

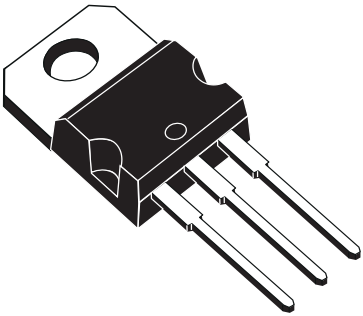

TO220

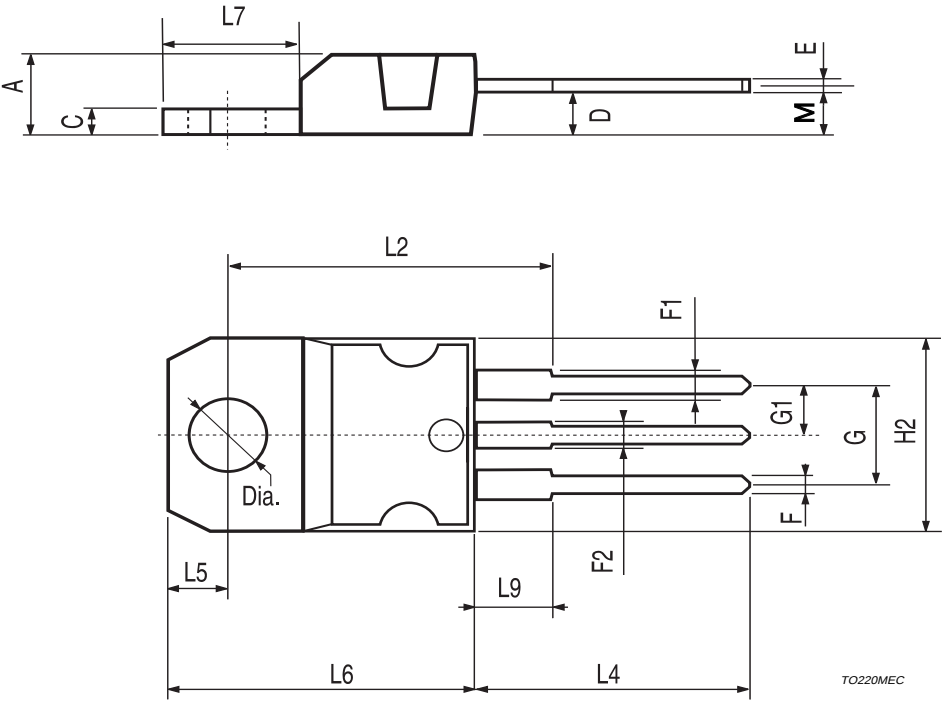

0015989 F

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2003 STMicroelectronics - All rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States
www.st.com