

TFT LCD Module Product Specification

DT043BTFT-PTS1

4.3" (480(RGB) x 272 PIXELS) TFT Module with Capacitive Touch Panel

October 28, 2016

Remark:

Contents in this document are subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Displaytech Ltd.

Displaytech Ltd.

Tel: (852) 2311 2080 ; Fax: (852) 2722 6998 ; Email: sales@displaytech.com.hk
Address: 31E Billion Plaza 2, No. 10 Cheung Yue Street, Cheung Sha Wan, Kowloon,

Hong Kong.

Website: http://www.displaytech.com.hk

Revision Record

REV	CHANGES	DATE
0.0	First release	Oct 28, 2016
(Ref. 1.0 20160930)		
	-	
	-	

Table of Content

Rev	vision Record	1
1.	Scope	3
2.	Application	3
3.	General Information	3
4.	Outline Drawing	4
5.	Interface Signals	5
6.	Absolute Maximum Ratings	6
7.	Electrical Specifications	6
8.	Optical Specification	7
9.	Environmental / Reliability Tests	10
10.	Precautions for Use of LCD Modules	10

1. Scope

This data sheet is to introduce the specification of DT043BTFT-PTS1 active matrix TFT module. It is composed of a color TFT-LCD panel, driver ICs, FPC, capacitive touch panel and a backlight unit. The 4.3" display area contains 480 (RGB) x 272 pixels.


2. Application

Digital equipments which need color display, mobile phone, mobile navigator/video systems.

3. General Information

Item	Contents	Unit
Size	4.3	inch
Resolution	480(RGB) x 272	/
Interface	RGB	/
Technology Type	a-Si TFT	/
Pixel Configuration	R.G.B. Vertical Stripe	/
Outline Dimension (W x H x D)	105.50 x 67.20 x 4.7	mm
Active Area	95.04 x 53.86	mm
Display Mode	Transmissive	/
Backlight Type	LED	/
Driver IC	HX8257A01	/
Driver IC for PCAP	FT5346	/
Weight	TBD	g

4. Outline Drawing

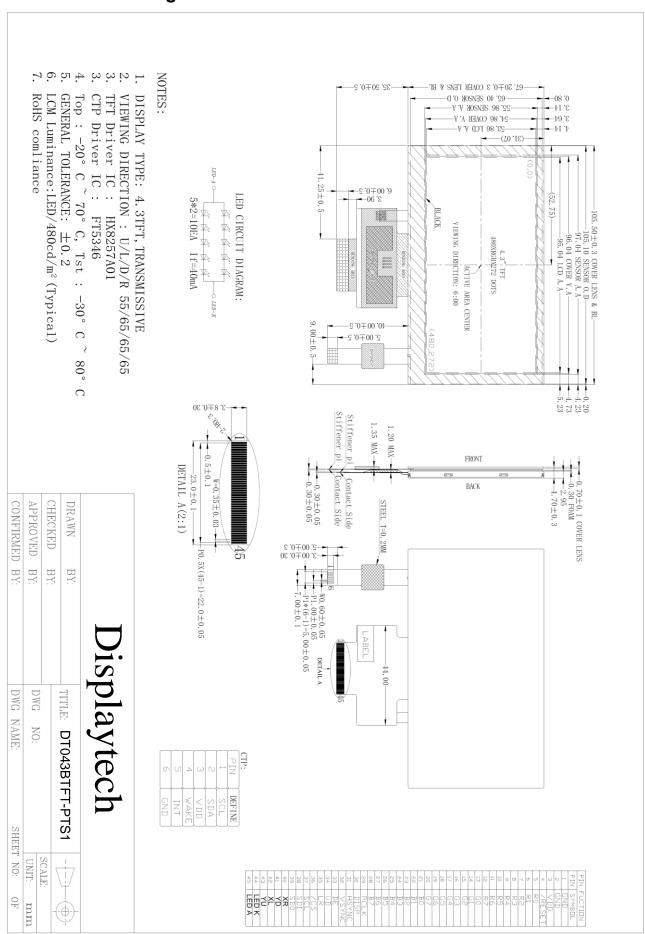

5. Interface Signals

Recommended connector: FH12-45S-0.5SH

Pin No.	Symbol	I/O	Function			
1-2	GND	Р	Ground			
3	VDD	Р	Power supply			
4	RESET		Reset the display, active low			
5-12	R0 ~ R7	ı	Red data bus			
13-20	G0 ~ G7		Green data bus			
21-28	B0 ~ B7		Blue data bus			
29	PCLK		Data clock			
30	DISP		Display ON/OFF control			
31	HSYNC	ı	Horizontal synchronous signal input			
32	VSYNC	I	Vertical synchronous signal input			
33	ENABLE	I	Data enable pin			
34	U/D	I	Select up or down scanning direction			
35	L/R		Select left or right scanning direction			
36	CS	I	Chip select signal			
37	SCL		Serial clock signal			
38	SDI		Serial in signal			
39	SDO	0	Serial out signal			
40	XR (NC)	0	Touch panel control pin (NC)			
41	YD (NC)	0	Touch panel control pin (NC)			
42	XL (NC)	0	Touch panel control pin (NC)			
43	YU (NC)	0	Touch panel control pin (NC)			
44	K	Р	LED backlight (Cathode)			
45	Α	Р	LED backlight (Anode)			

CTP signal interface

Pin No.	Symbol	Function
1	SCL	Clock for the data input
2	SDA	Data input
3	VDD	Power supply
4	WAKE	
5	INT	Interrupt output pin
6	GND	Ground

6. Absolute Maximum Ratings

6.1 Electrical absolute maximum ratings

Parameter	Symbol	MIN	MAX	Unit	Remark
Power Supply Voltage	VCC	-0.3	3.6	V	

Notes:

- 1. If the module is above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
- 2. VCC > VSS must be maintained.

6.2 Environment conditions

Parameter	Symbol	MIN	MAX	Unit	Remark
Operating Temperature	TOPR	-20	+70	°C	
Storage Temperature	TSTG	-30	+80	°C	

Note:

- 1. The response time will become lower when operated at low temperature.
- 2. Background color changes slightly depending on ambient temperature. The phenomenon is reversible.
- 3. Ta<=40°C:85%RH MAX.

Ta>= 40° : Absolute humidity must be lower than the humidity of 85%RH at 40° .

7. Electrical Specifications

7.1 Electrical characteristics

GND=0V, Ta=25°C

Item		Symbol	Condition	MIN	TYP	MAX	Unit	Remark
Power Supply		VDD	Ta=25°C	3.0	3.3	3.6	V	
Innut Valtage	Н	VIH	VDD=3.3V	0.8VDD	-	VDD	V	
Input Voltage	L	VIL	VDD=3.3V	0	-	0.2VDD	V	
Current		ICC1	Normal mode	-	20	30	mA	
Consumption		ICC2	Sleep mode	-	0.05	0.1	mA	
Clock Frequenc	;y	fCLK	-	-	9	12	MHz	

Note: Tested in 1×1 chessboard pattern.

7.2 LED backlight

Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward current	IF	-	40	-	mA	
Forward voltage	VF	-	15	-	V	
LED life time	-	-	20,000	-	Hr	Note

Note 1: The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL =40mA. The LED lifetime could be decreased if operating IL is larger than40mA.

Note 2: Backlight should be driven in constant current mode. Use a supply voltage of 17 Volts or higher with a series resistor to limit the current to 40 mA (e.g. (17V - (5 x 3.2V))/0.040 = 25 ohms). Alternatively, the backlight can be driven from lower voltages with a boost LED driver such as the ON Semiconductor CAT4139.

8. Optical Specification


Ta=25°C

Item		Symbol	Condition	MIN	TYP	MAX	Unit	Remark	
Contrast ratio		CR	θ=0°	350	500	-		Note 1, 2	
Response time	^	Tr	2500	-	10	-	mo	Note 1 2	
Response um	U	Tf	25°C	-	10	-	ms	Note 1, 3	
		ΘΤ		-	55	-			
View engles		ΘΒ	CR≧10	-	65	-	Dograd	Note 4	
View angles		ΘL	OIX≦ 10	-	65	-	Degree	Note 4	
				-	65	-			
	White X		-	0.285	1				
	vvriite	У		-	0.331	ı			
	Red	Х		-	TBD	•			
Chromaticity	Neu	У	Brightness	-	TBD	-		Note 1, 5	
Cilionalicity	Green	Х	is on	-	TBD	-		Note 1, 5	
	Green	У		-	TBD	•			
	Blue	Х		-	TBD	•			
	Dide	У		-	TBD	•			
NTSC Ratio		S	·	50	60		%	Note 1, 5	
Luminance		L	·	350	48/0	•	cd/m ²	Note 1, 6	
Uniformity		U		-	80	-	%	Note 1, 7	

Note 1: Definition of optical measurement system.

Temperature = 25° C($\pm 3^{\circ}$ C)

LED back-light: ON, Environment brightness < 150 lx

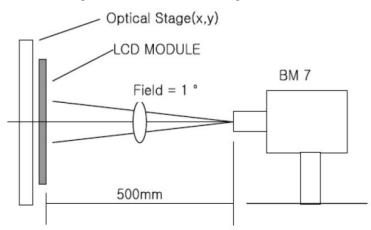


Note 2: Contrast ratio is defined as follow:

Contrast Ratio = Surface Luminance with all white pixels Surface Luminance with all black pixels


Note 3: Response time is defined as follow:

Response time is the time required for the display to transition from black to white (Rise time, Tr) and from white to black (Decay Time, Tf).

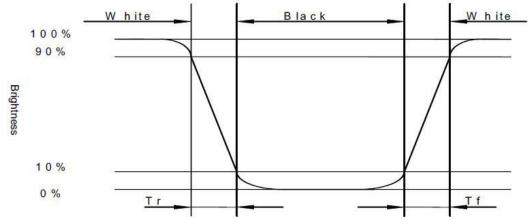


Note 4: Viewing angle range is defined as follow:

Viewing angle is measured at the center point of the LCD.

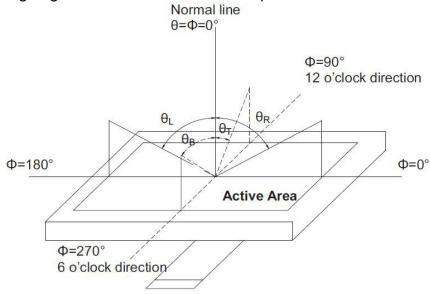

Note 5: Color chromaticity is defined as follow (CIE1931)
Color coordinates measured at center point of LCD.

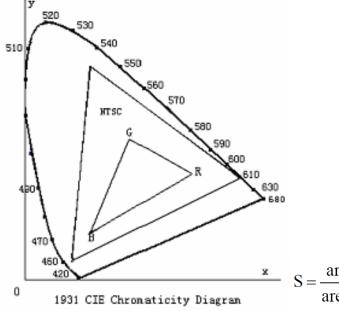

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

Note 6: Luminance is defined as follow:

Luminance is defined as the brightness of all pixels "White" at the center of display area on optimum contrast.

Note 7: Luminance Uniformity is defined as follow:

Active area is divided into 9 measuring areas (Refer Fig.2). Every measuring point is placed at the center of each measuring area.

Uniformity (U) = Minimum Luminance(brightness) in 9 points

Maximum Luminance(brightness) in 9 points

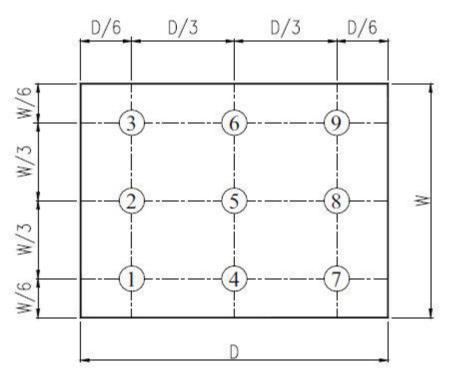


Fig. 2 Definition of uniformity

9. Environmental / Reliability Tests

No	Test Item	Condition	Judgment Criteria
1	High Temp Operation	Ta=+70°C, 96hrs	Per table below
2	Low Temp Operation	Ta=-20°C, 96hrs	Per table below
3	High Temp Storage	Ta=+80°C, 96hrs	Per table below
4	Low Temp Storage	Ta=-30°C, 96hrs	Per table below
5	High Temp & High Humidity Storage	Ta=+60°C, 90% RH, 96hrs	Per table below (polarizer discoloration is excluded)
6	Thermal Shock (Non-operation)	-30°C 30 min~+80°C 30 min, Change time:5min, 5 Cycles	Per table below
7	ESD (Operation)	C=150pF, R=330 Ω, 5points/panel Air:±8KV, 5times; Contact:±4KV, 5 times;	Per table below
8	Vibration (Non-operation)	10Hz~150Hz, 100m/s², 120min	Per table below
9	Shock (Non-operation)	Half- sine wave,300m/s ² ,11ms	Per table below
10	Package Drop Test	Height: 80cm, 1 corner, 3 edges, 6 surfaces	Per table below

Inspection	Criterion (after test)		
Appearance	No crack on the FPC, on the LCD panel		
Alignment of LCD panel	No bubbles in the LCD panel No other defects of alignment in active area		
Electrical current	Within device specifications		
Function / Display	No broken circuit, no short circuit or no black line No other defects of display		

10. Precautions for Use of LCD Modules

10.1 Safety

The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

10.2 Handling

- a. The LCD and touch panel is made of plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- b. Do not handle the product by holding the flexible pattern portion in order to assure the reliability.
- c. Transparency is an important factor for the touch panel. Please wear clear finger sacks, gloves and mask to protect the touch panel from finger print or stain and also hold the portion outside the view area when handling the touch panel.
- d. Provide a space so that the panel does not come into contact with other components.
- e. To protect the product from external force, put a covering lens (acrylic board or similar board) and keep an appropriate gap between them.
- f. Transparent electrodes may be disconnected if the panel is used under environmental conditions where dew condensation occurs.
- g. Property of semiconductor devices may be affected when they are exposed to light, possibly resulting in IC malfunctions.

h. To prevent such IC malfunctions, your design and mounting layout shall be done in the way that the IC is not exposed to light in actual use.

10.3 Static electricity

- a. Ground soldering iron tips, tools and testers when they are in operation.
- b. Ground your body when handling the products.
- c. Power on the LCD module before applying the voltage to the input terminals.
- d. Do not apply voltage which exceeds the absolute maximum rating.
- e. Store the products in an anti-electrostatic bag or container.

10.4 Storage


- a. Store the products in a dark place at +25°C±10°C with low humidity (40% RH to 60% RH). Don't expose to sunlight or fluorescent light.
- b. Storage in a clean environment, free from dust, active gas, and solvent.

10.5 Cleaning

- a. Do not wipe the touch panel with dry cloth, as it may cause scratch.
- b. Wipe off the stain on the product by using soft cloth moistened with ethanol. Do not allow ethanol to get in between the upper film and the bottom glass. It may cause peeling issue or defective operation. Do not use any organic solvent or detergent other than ethanol.

10.6 Cautions for installing and assembling

Bezel edge must be positioned in the area between the Active area and View area. The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.

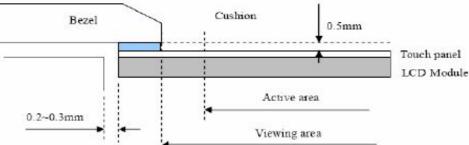

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Displaytech:
DT043BTFT-PTS