

**KEY FEATURES**

- Ultra-wideband, DC to 67GHz
- Low Insertion Loss, 0.1 dB Typ.
- Straight Body
- Excellent VSWR, 1.06:1 Typ.

*Generic photo used for illustration purposes only***PRODUCT OVERVIEW**

Mini-Circuits' 10M-185M+ is a coaxial 1.0mm Male to 1.85mm Male adapter supporting a wide range of applications from DC to 67 GHz. This model provides excellent VSWR and low insertion loss versus frequency. The 10M-185M+ features passivated stainless-steel construction and measures only 0.69" in length.

**ELECTRICAL SPECIFICATIONS AT +25°C**

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		67	GHz
Insertion Loss	0.01-30	—	0.08	0.53	dB
	30-40	—	0.07	0.53	
	40-50	—	0.10	0.53	
	50-67	—	0.11	0.53	
VSWR	0.01-30	—	1.07	1.25	:1
	30-40	—	1.06	1.25	
	40-50	—	1.06	1.25	
	50-67	—	1.07	1.25	

Absolute Maximum Ratings are on page 3.






COAXIAL

# Adapter

**10M-185M+**

50 $\Omega$  DC to 67 GHz 1.0mm-Male to 1.85mm-Male

## TYPICAL PERFORMANCE GRAPHS

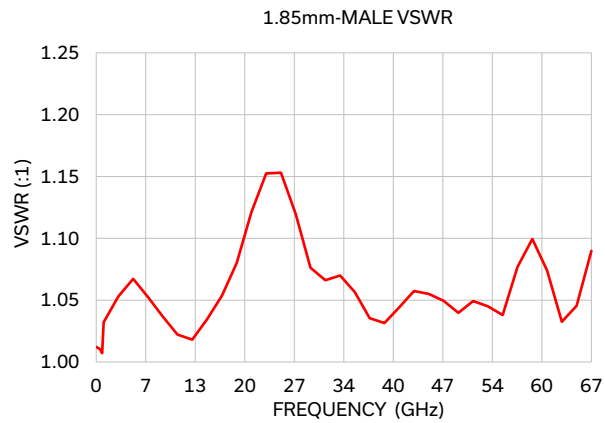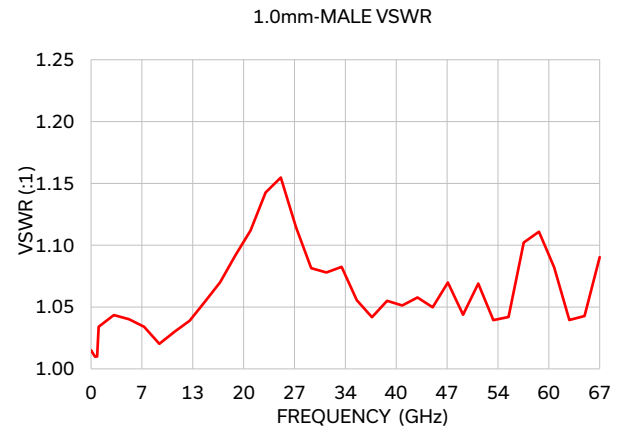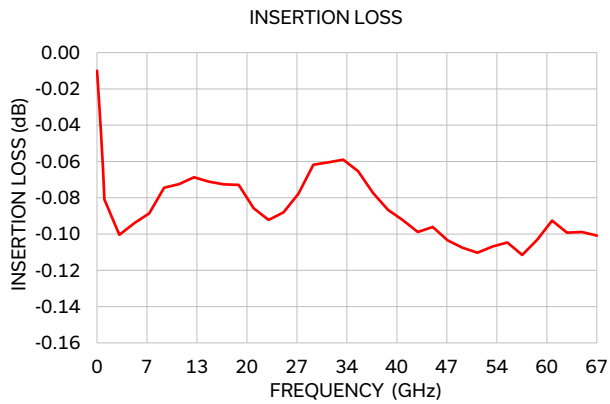



COAXIAL

# Adapter

10M-185M+

Mini-Circuits

50Ω DC to 67 GHz 1.0mm-Male to 1.85mm-Male

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup>


Parameter	Ratings
Operating Case Temperature	+10 °C to +40 °C
Storage Temperature	+10 °C to +40 °C

1. Permanent damage may occur if any of these limits are exceeded.

## CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	1.0mm Male	1.85mm Male
Orientation	Straight	Straight

## CASE STYLE DRAWING

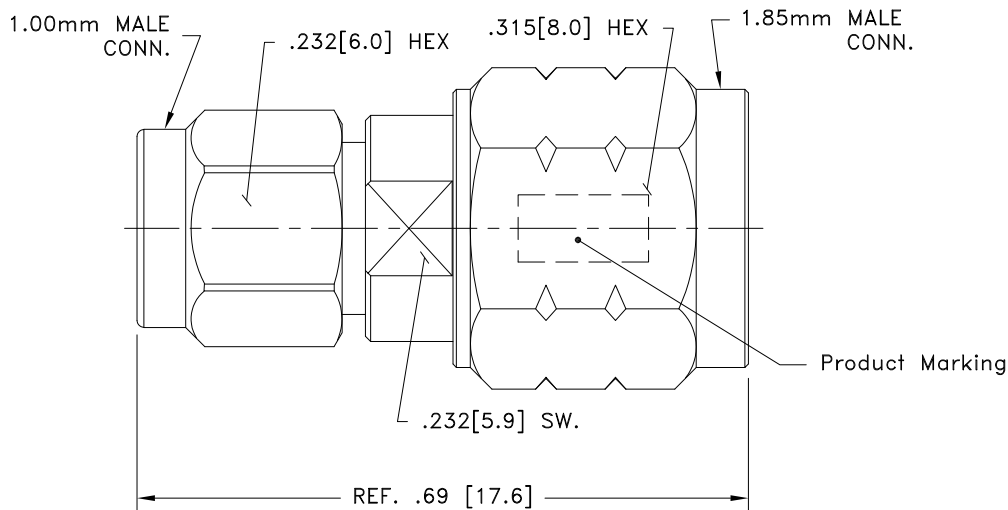

Weight: 3.8 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl.  $\pm 0.03$ ; 3 Pl.  $\pm 0.015$  inches

## PRODUCT MARKING\*: 10M-185M+

\*Marking may contain other features or characters for internal lot control.

## ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ3474-6
RoHs Status	Compliant
Environmental Ratings	ENV127T1

## NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[10M-185M+](#)