

Power Splitter/Combiner

2 Way-0°

50Ω

10 to 1000 MHz

ADP-2-4+



Generic photo used for illustration purposes only

CASE STYLE: CD636

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

SUM PORT	1
PORT 1	3
PORT 2	4
GROUND	6
Externally connect together & isolate	2,5

Outline Drawing




PCB Land Pattern

Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
.272	.310	.220	.100	.162	.055	.100	
6.91	7.87	5.59	2.54	4.11	1.40	2.54	
H	J	K	L		wt		
.030	.026	.065	.300		grams		
0.76	0.66	1.65	7.62		0.25		

Demo Board MCL P/N: TB-208 Suggested PCB Layout (PL-116)

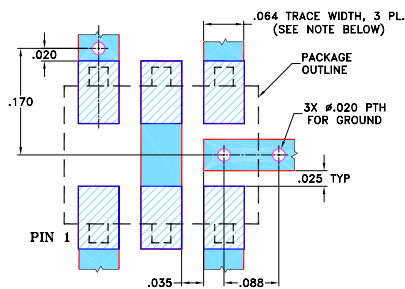

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance, 0.10 dB typ.
- very good phase unbalance, 0.5 deg. typ.
- aqueous washable
- protected under U.S. Patent 6,133,525

Applications

- instrumentation
- cellular

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L		M	U			L		M	L		M	U					
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.				
f _L -f _U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.				
10-1000	25	20	23	16	19	14	0.3	0.5	0.4	0.9	0.8	1.5	1.0	3.0	5.0	0.15	0.2	0.4

L = 10-100 MHz M = 100-500 MHz U = 500-1000 MHz

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
10.00	3.27	3.26	0.01	29.66	0.03	1.12	1.27	1.27
50.00	3.26	3.26	0.00	27.85	0.05	1.12	1.24	1.24
100.00	3.22	3.22	0.00	26.35	0.13	1.15	1.25	1.25
200.00	3.30	3.30	0.00	24.51	0.21	1.22	1.27	1.26
250.00	3.35	3.34	0.01	23.57	0.21	1.25	1.28	1.27
350.00	3.38	3.36	0.02	22.19	0.32	1.32	1.31	1.30
400.00	3.53	3.52	0.01	21.78	0.36	1.36	1.33	1.31
500.00	3.56	3.53	0.03	20.95	0.44	1.42	1.36	1.33
550.00	3.58	3.55	0.03	20.65	0.50	1.44	1.37	1.34
650.00	3.66	3.60	0.05	20.35	0.54	1.48	1.39	1.35
700.00	3.69	3.63	0.07	20.39	0.62	1.49	1.40	1.35
800.00	3.87	3.79	0.08	20.86	0.70	1.48	1.40	1.35
850.00	3.72	3.62	0.10	21.23	0.76	1.46	1.39	1.34
950.00	3.94	3.82	0.12	23.04	0.78	1.39	1.38	1.31
1000.00	4.01	3.88	0.13	24.55	0.90	1.34	1.37	1.30

1. Total Loss = Insertion Loss + 3dB splitter loss.

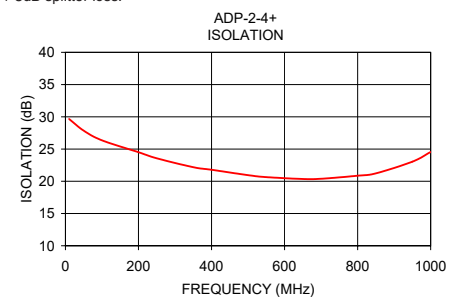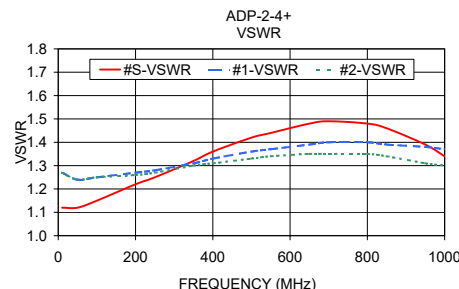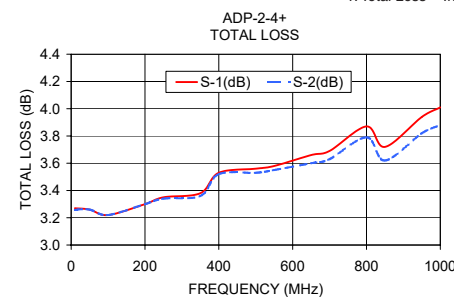

electrical schematic



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ADP-2-4+](#)