

Ceramic

Balance Filter

50Ω 1710 to 2610 MHz


Features

- Small size (0.126"x0.098"x0.039")
- Temperature stable
- Hermetically sealed


Applications

- ISM
- Cellular

Simplified Schematic



Top View



Pad Connections

Unbalanced Port	7
Balanced Port	3, 5
GND	2, 4, 8
GNC or DC Feed	6
NC	1

BBFCV-2250+



Generic photo used for illustration purposes only

CASE STYLE: JV1210C-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications







Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			2:1			
Insertion Loss	F1-F2	1710 - 2610	—	—	3.2	dB
Attenuation		10-670	35	—	—	dB
		670-1240	17	—	—	
		3390-5400	27	—	—	
		5400-6000	17	—	—	
Amplitude Unbalance		1710 - 2610	—	—	1.5	dB
Phase Unbalance		1710 - 2610	—	—	15	degree
Input VSWR		1710 - 2610	—	1.8	—	:1

Maximum Ratings

Operating Temperature	-55°C to +105°C
Storage Temperature	-55°C to +105°C
RF Power Input*	1W @25°C

* Refer to product storage temperature after installation
Suggestion for T&R unused product storage condition: +5 ~ +35 °C,
Humidity 45~75%RH, 12 month Max

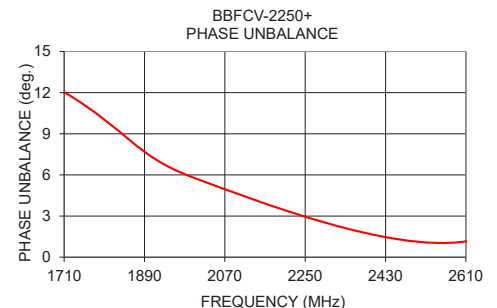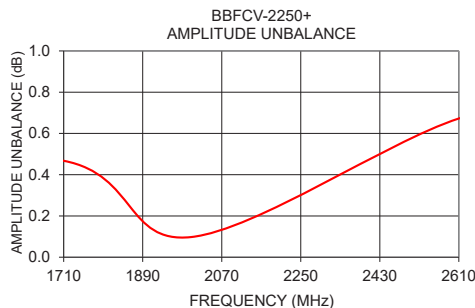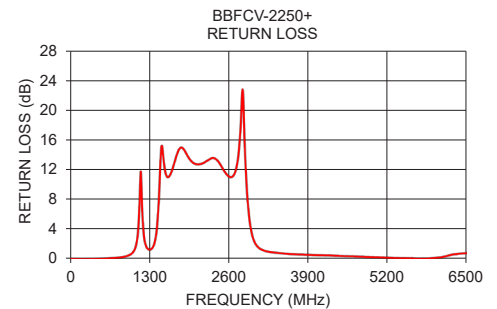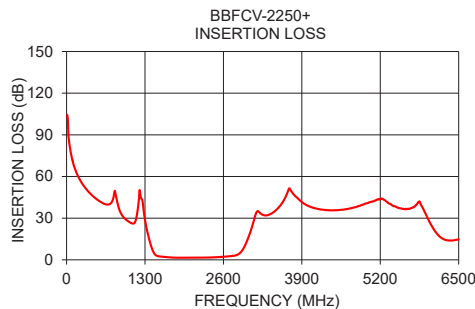



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-001655
BBFCV-2250+
AVB/CP/AM
200924
Page 1 of 2


Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (Deg.)
10	104.41	0.04	0.32	92.40
50	82.29	0.03	3.87	5.15
100	71.51	0.03	4.02	4.76
500	43.62	0.07	2.66	12.67
1000	28.43	0.75	0.50	25.45
1710	1.75	13.21	0.47	12.04
2000	1.54	13.03	0.10	5.80
2610	2.26	11.05	0.67	1.16
3000	14.60	2.64	0.79	10.88
3500	36.99	0.77	4.27	33.06
4000	38.92	0.55	0.48	14.44
4500	35.81	0.41	4.14	7.47
5000	40.97	0.26	3.86	58.46
5500	37.46	0.13	0.47	16.56
6000	28.71	0.20	0.12	33.44
6500	14.78	0.83	3.10	13.19

Outline Drawing

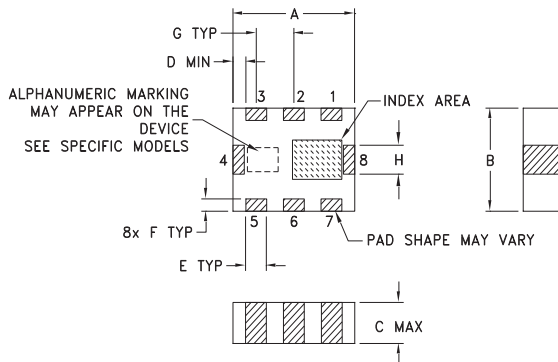

Demo Board MCL P/N: TB-1053+ Suggested PCB Layout (PL-632)

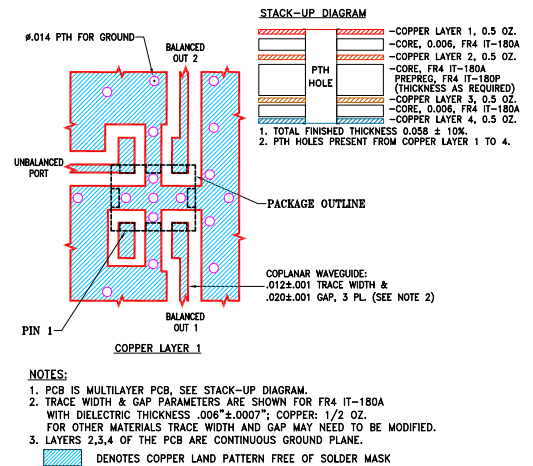

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.126	.098	.039	.004	.022	.012	.039
3.2	2.5	1.0	0.1	0.56	0.3	1.0
H	J	K	L	M	wt	
.028	.031	.024	.130	0.15	grams	
0.7	0.8	0.6	3.30	3.81	0.030	

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BBFCV-2250+](#)