


High Power Bi-Directional Coupler

NON-CATALOG

BDCN-17-25

50Ω 17dB Coupling DC Pass 824 to 2525 MHz



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	0.5A
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	4
COUPLED (forward)	6
COUPLED (reverse)	3
GROUND	2,5

Features

- four-port coupler
- wideband, 824 to 2525 MHz
- excellent VSWR, 1.2:1 typ., all ports
- ultra small size, hermetically sealed
- minimal variation with temperature variation
- protected by US Patent 7,049,905
- DC current through input to output 0.5A Max. at 1.0 watt RF input power

Applications

- UMTS
- CDMA
- PCS
- ISM
- GPS
- DCS
- TDMA

Bi-Directional Coupler Electrical Specifications




FREQUENCY (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT ² (W)	
	Nom.	Max. Flatness	Typ.	Max.	Typ.	Min.		Typ.	Max.
f_c - f_u									
824-2525	16.8±2.0	±3.0	0.6	0.9	13	10	1.2	16	16
824-894	18.3±0.6	±0.6	0.3	0.8	13	10	1.2	16	16
880-960	17.6±0.6	±0.6	0.3	0.8	13	10	1.2	16	16
1710-1880	14.3±0.6	±0.4	0.5	0.9	22	17	1.2	16	16
1850-1990	14.3±0.6	±0.4	0.5	0.9	22	17	1.2	16	16
2110-2170	14.3±0.6	±0.5	0.5	0.9	25	20	1.2	16	16
2375-2525	15.0±0.6	±0.8	0.5	0.9	15	11	1.2	16	16

1. Includes theoretical power loss of 0.1 dB at 17 dB coupling.


2. Derate linearly 8W at 100°C

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev	
824.00	0.25	18.40	18.40	13.19	13.24	27.22	27.34	26.50	27.52	
1000.00	0.30	17.07	17.08	13.85	13.88	25.83	26.07	25.35	26.82	
1500.00	0.42	14.87	14.88	17.67	17.63	23.35	23.34	25.52	25.99	
1700.00	0.46	14.45	14.46	20.65	20.43	23.72	23.26	26.46	26.58	
1800.00	0.48	14.32	14.33	22.72	22.36	23.44	22.72	27.48	26.58	
1880.00	0.48	14.25	14.26	24.64	24.13	23.72	22.87	27.72	26.82	
2000.00	0.50	14.22	14.23	27.94	27.40	23.63	23.17	29.06	26.72	
2100.00	0.50	14.26	14.26	28.30	27.88	24.33	23.91	29.31	27.02	
2300.00	0.51	14.54	14.53	21.69	21.71	25.09	24.22	28.13	28.67	
2525.00	0.49	15.18	15.16	15.51	15.42	27.33	26.72	27.50	30.60	

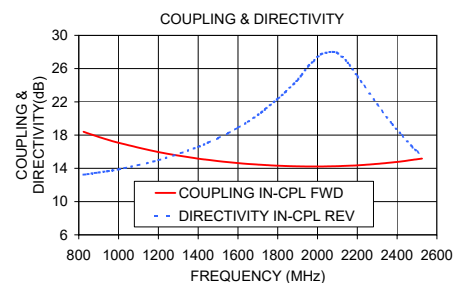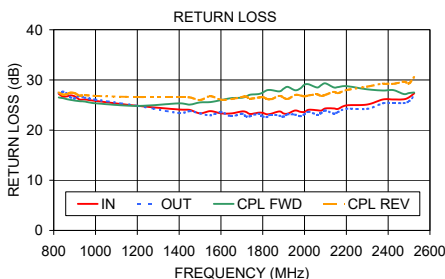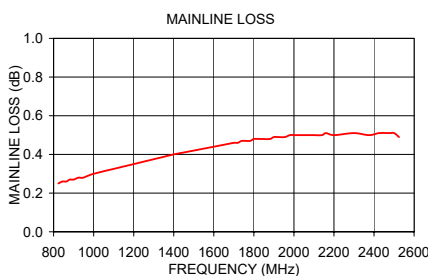


Electrical Schematic




* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)



NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F
ECO-005918
ED-10885/1
BDCN-17-25
AD/TD/CP/AM
210128

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BDCN-17-25+](#)