


**THE BIG DEAL**


- Good Rejection, 25 dB Typ.
- 1206 Surface Mount Footprint
- Power Handling: 1.5 Watts



Generic photo used for illustration purposes only

**APPLICATIONS**

- Harmonic Rejection
- Transmitters / Receivers

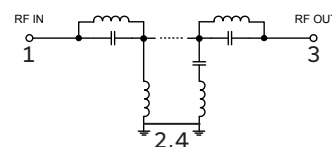**FUNCTIONAL DIAGRAM****PRODUCT OVERVIEW**

Mini-Circuits' BFCN-2910+ LTCC Band Pass Filter is constructed with multiple layers in order to achieve a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 120 MHz passband, these units offer low insertion loss and good rejection.

**KEY FEATURES**

Features	Advantages
Small Size, 1206	Allows for high layout density of circuit boards, while minimizing the effects of parasitics
Wrap around termination	Provides excellent solderability and easy visual inspection capability.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.
Rugged Power handling	Handles up to 1.5 Watts in a small package.



LTCC SURFACE MOUNT

## Bandpass Filter

BFCN-2910+

50Ω

2850 to 2970 MHz

ELECTRICAL SPECIFICATIONS<sup>1,2</sup> AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency <sup>4</sup>	—	—	—	2910	—	MHz
	Insertion Loss	F1-F2	2850 - 2970	—	—	7	dB
	Return Loss	F1-F2	2850 - 2970	7.0	12.7	—	dB
Stop Band, Lower	Rejection	DC-F3	DC - 1550	—	25	—	dB
		DC-F4	DC - 1600	20	—	—	
Stop Band, Upper	Rejection	F5-F6	4200 - 4250	20	—	—	dB
		F6-F7	4250 - 6000	—	25	—	

1. Tested in Evaluation Board P/N TB-BFCN-2910+.

2. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


3. Typical variation  $\pm 5\%$ ABSOLUTE MAXIMUM RATINGS<sup>4</sup>

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input Power <sup>5</sup>	1.5W @25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.25W at +100°C.

## TYPICAL FREQUENCY RESPONSE

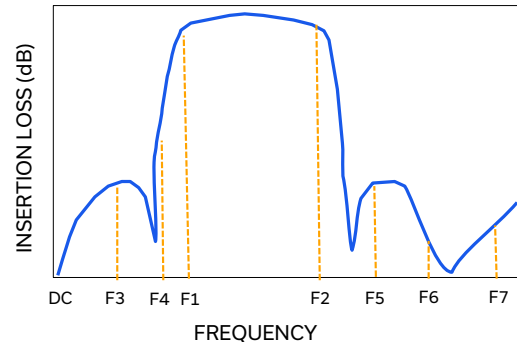



LTCC SURFACE MOUNT

# Bandpass Filter




**BFCN-2910+**

Mini-Circuits


50Ω

2850 to 2970 MHz

## TYPICAL PERFORMANCE GRAPHS AT +25°C

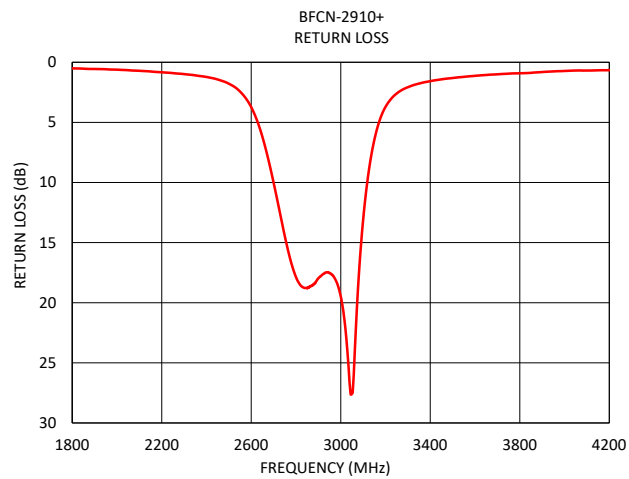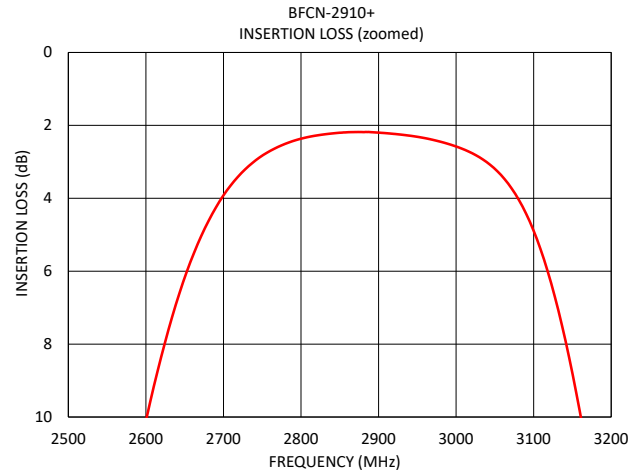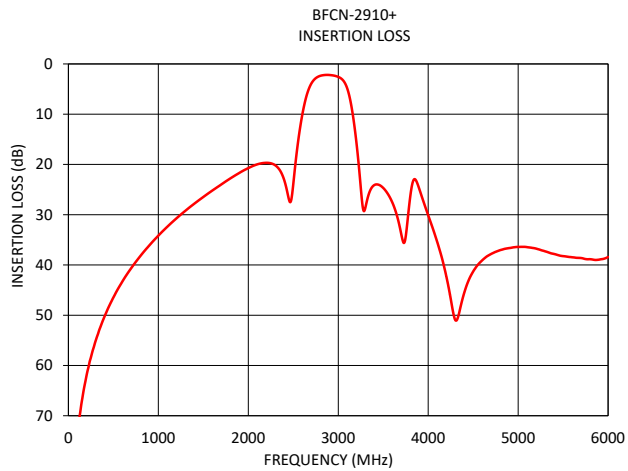

## FUNCTIONAL DIAGRAM

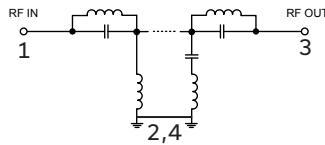



**Figure 1. BFCN-2910+ Functional Diagram**


## PAD DESCRIPTION

Function	Pad Number	Description
RF1 <sup>2</sup>	1	Connects to RF Input Port
RF2 <sup>2</sup>	3	Connects to RF Output Port
GROUND	2,4	Connects to Ground on PCB, (See drawing PL-137)

## SUGGESTED PCB LAYOUT (PL-137)

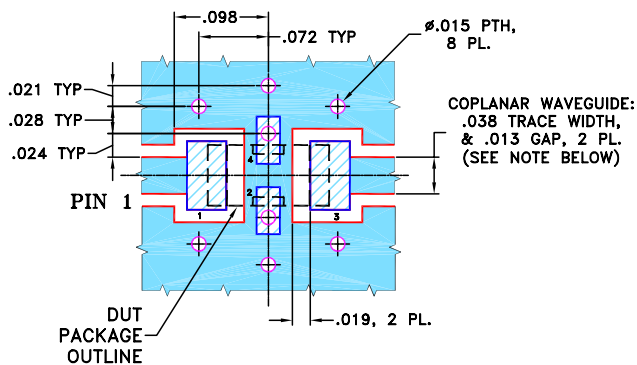


- NOTES:**
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020"  $\pm$  .0015".  
COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- 

DENOTES PCB COPPER LAYOUT WITH SMOBC  
(SOLDER MASK OVER BARE COPPER)
- 

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

**Figure 2. Suggested PCB Layout PL-137**

## CASE STYLE DRAWING

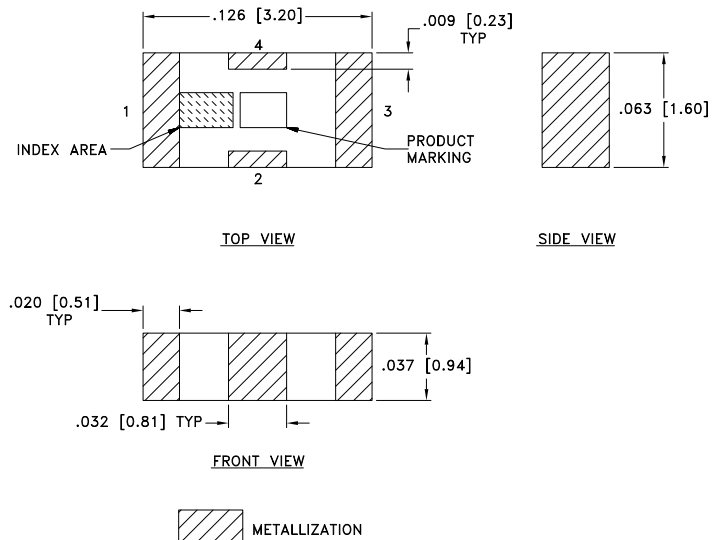

Weight: .020 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl.±.01; 3 Pl. ±.005

**PRODUCT MARKING\*:** N/A

\*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LTCC SURFACE MOUNT

# Bandpass Filter

**BFCN-2910+**

50Ω

2850 to 2970 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	FV1206    Lead Finish: Nickel Tin
RoHS Status	Compliant
Tape and Reel	TR-F71
Suggested Layout for PCB Design	PL-137
Evaluation Board	TB-BFCN-2910+ Gerber File
Environmental Rating	ENV06

## NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BFCN-2910+](#)