

#### **COAXIAL MILLIMETER WAVE**

## Precision Fixed Attenuator **BW-S6-2W263A+**

50Ω 2W 6dB DC to 26 GHz

#### **THE BIG DEAL**

- DC to 26 GHz
- · Precise attenuation
- Excellent VSWR, 1.05 typ.
- · Passivated stainless steel connectors



Generic photo used for illustration purposes only

Model No.	BW-S6-2W263A+
Case Style	FF3336
Connectors	SMA-Fem to SMA-Male

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### **APPLICATIONS**

- Matching
- Instrumentation
- Test set-ups

#### **PRODUCT OVERVIEW**

The BW-SX-2W263A+ Series of precision fixed attenuators achieves ultra-wide frequency range with excellent VSWR. Available in a variety of attenuation values for different requirements, these units support a broad range of system and testing applications. Precise performance, excellent VSWR and wide band features make these models ideal solutions for systems requiring precise attenuation across very wide frequency range.

#### **KEY FEATURES**

Feature	Advantages	
Ultra wideband, DC to 26 GHz	Ideal for an exceptionally wide variety of applications.	
Excellent VSWR, 1.05 typ.	Efficient power utilization with low power reflected back to source.	
Passivated stainless steel connectors	Rugged construction withstands harsh environmental conditions for high reliability and long life of use.	

REV. A ECO-014386 BW-S6-2W263A+ QE/CP/AM 220801



**□** Mini-Circuits


# Precision Fixed Attenuator **BW-S6-2W263A+**

#### **MAXIMUM RATINGS**

Operating Temperature	-55°C to 100°C	
Storage Temperature	-55°C to 100°C**	

Permanent damage may occur if any of these limits are exceeded. \*\* With mated connectors.


#### **OUTLINE DRAWING**

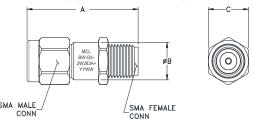

### **OUTLINE DIMENSIONS (Inches)**

dB Value	Α	В	С	Wt Grams (Max.)
0-10	.86 (21.84)	.28	.312	6.0
15,20,30	1.02 (25.91)	(7.1)	(7.92)	6.0

#### **ELECTRICAL SCHEMATIC**




#### **ELECTRICAL SPECIFICATIONS AT 25°C**


Parameter	Condition (GHz)	Min.	Тур.	Max.	Units
Frequency Range		DC		26	GHz
Attenuation <sup>1</sup>	DC - 26	5.25	6.1	6.75	dB
	DC - 6	_	1.02	1.15	
VSWR	6 - 18	_	1.05	1.30	:1
	18 - 26	_	1.09	1.40	
Input Power <sup>2</sup>	DC - 26	_	_	2	W

- 1. At 25°C, accuracy includes frequency and power variations.
- 2. Max. Power at 25°C ambient, derate linearly to 0.5W at 125°C. Peak power 250W max. 5µsec. pulse width, 10% duty cycle.

#### **TYPICAL PERFORMANCE DATA**

TIT TO/LET EITH OTHER THOSE BY TIVE			
Attenuation (dB)	VSWR (:1)		
6.01	1.01		
6.04	1.01		
6.04	1.02		
6.05	1.02		
6.06	1.02		
6.07	1.02		
6.08	1.03		
6.09	1.05		
6.10	1.07		
6.10	1.07		
6.12	1.07		
6.14	1.07		
6.17	1.09		
6.21	1.10		
6.28	1.10		
	Attenuation (dB) 6.01 6.04 6.04 6.05 6.06 6.07 6.08 6.09 6.10 6.10 6.12 6.14 6.17 6.21		

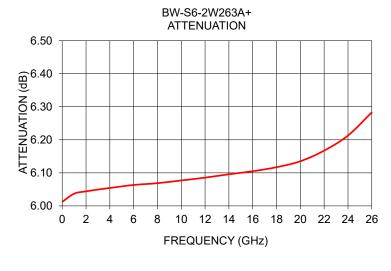

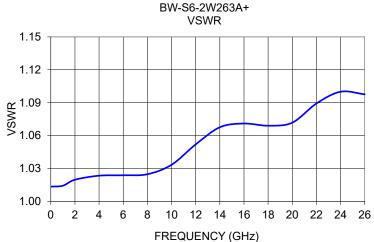

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits:
BW-S6-2W263A+