



Mini-Circuits

MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+

50Ω Output 10 to 22 GHz

THE BIG DEAL

- Ultra-wideband, output from 10 to 22 GHz
- Wide input power range, +12 to +18 dBm
- Low Conversion Loss, 17 dB Typ.
- Good Fundamental and Harmonic Suppression:
F1 > +34 dBc; F2 > +45 dBc; F4 > +50 dBc
- Tiny size, 4 x 4mm 24L



Generic photo used for illustration purposes only

CASE STYLE: DG1847

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- 5G MIMO and Back Haul Radio Systems
- Satellite Communications
- Test and Measurement Equipment
- Radar, EW, and ECM Defense Systems

PRODUCT OVERVIEW

Mini-Circuits' CY3-223+ is an ultra-wideband MMIC Frequency Tripler, converting input frequencies from 3.33 to 7.33 GHz into output frequencies from 10 to 22 GHz. Its wide output range makes this model suitable for broadband systems as well as a wide variety of narrow-band applications. Utilizing GaAs HBT technology, the multiplier comes housed in a tiny 4x4mm 24L MCLP package and offers excellent repeatability, low inductance, and good thermal efficiency.

KEY FEATURES

Feature	Advantages
Broadband, 10 to 22 GHz output	With an output frequency range spanning 10 to 22 GHz, this multiplier supports broadband applications such as defense and instrumentation as well as a wide range of narrowband system requirements including 5G.
Excellent fundamental and harmonic suppression: • F1 +34 dBc • F2 +45 dBc • F4 +50 dBc	Reduces spurious signals and the need for additional filtering.
Wide input power range, +12 to +18 dBm	Wide input power signal range accommodates different input signal levels while still maintaining a low Conversion Loss.





MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+

50Ω Output 10 to 22 GHz

ELECTRICAL SPECIFICATIONS¹ AT 25°C AND $Z_0 = 50\Omega$, UNLESS NOTED OTHERWISE

Parameter		Input Frequency (GHz)	RF Input = +12 dBm			Unit
			Min.	Typ.	Max.	
Multiplication Factor				3		
Frequency Range, Input (F1)			3.33	-	7.33	GHz
Frequency Range, Output (F3)			10	-	22	GHz
Input Power			+12	-	+18	dBm
Conversion Loss		3.33	-	22.0	26.2	dB
		4	-	18.0	22.1	
		5	-	16.4	20.4	
		6	-	18.2	23.0	
		7.33	-	22.1	27.5	
Harmonic Output ²	F1	3.33	-	45.8	-	dBc
		4	-	49.8	-	
		5	-	46.6	-	
		6	-	44.9	-	
		7.33	-	22.1	-	
	F2	3.3	-	86.1	-	dBc
		4	-	71.9	-	
		5	-	55.1	-	
		6	-	45.0	-	
		7.33	-	39.9	-	
	F4	3.33	-	47.9	-	dBc
		4	-	48.9	-	
		5	-	56.2	-	
		6	-	51.7	-	
		7.33	-	40.9	-	

1. Measured on Mini-Circuits Characterization Test Board TB-CY3-223C+.

2. Harmonics of input frequency below the power level of F3.

MAXIMUM RATINGS³

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Input RF Power	+22 dBm (5 minute max)
	+19 dBm (Continuous)

3. Permanent damage may occur if any of these limits are exceeded.





Mini-Circuits



MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+

50Ω Output 10 to 22 GHz

SIMPLIFIED SCHEMATIC AND PAD DESCRIPTION

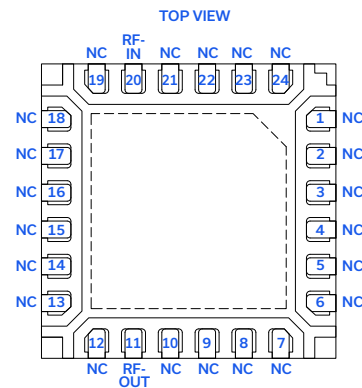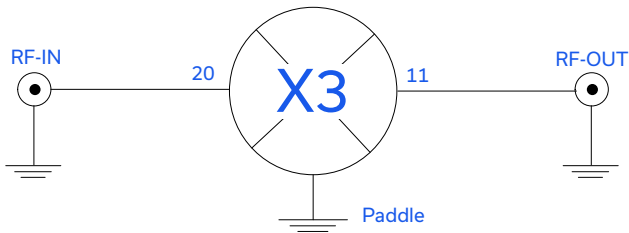

Function	Pad Number	Description
RF-IN	20	RF-Input Pad.
RF-OUT	11	RF-Output Pad.
Ground	Paddle	Connects to ground
No Connections	1-10, 12-19, 21-24	Not used internally. Connected to ground on test board.

APPLICATION AND CHARACTERIZATION CIRCUIT


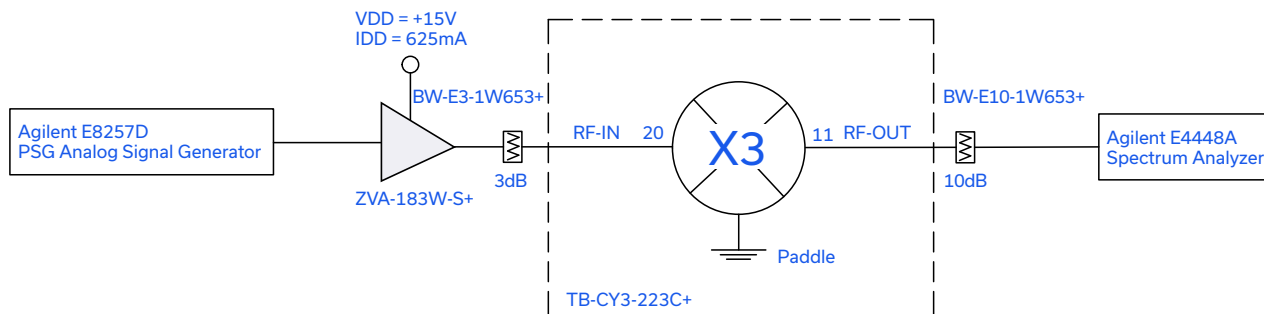


Fig 1. Application and Characterization Circuit

Note: This block diagram is used for characterization. (DUT is soldered and measured on Mini-Circuits Characterization Test Board TB-CY3-223C+) Conversion Loss and Harmonic Output are measured using Agilent E4448A PSA Spectrum Analyzer.

PRODUCT MARKING

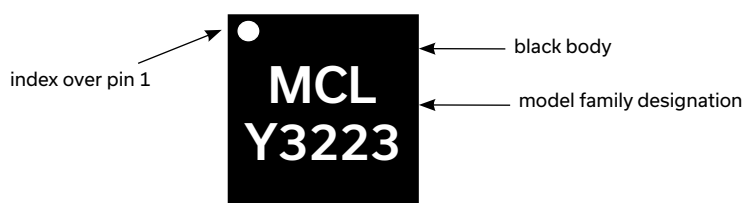

Marking may contain other features or characters for internal lot control





MMIC SURFACE MOUNT

X3 Frequency Multiplier


CY3-223+

Mini-Circuits


50Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
Temperature = +25°C

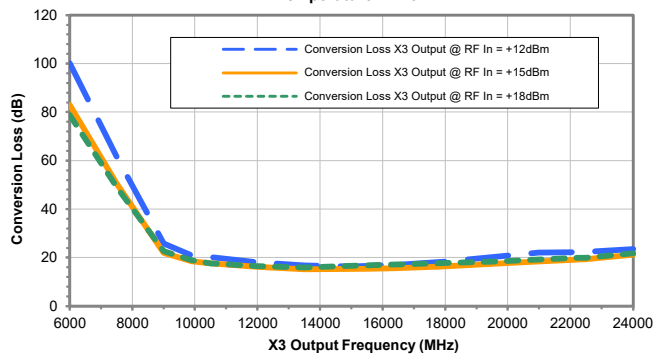


Harmonic X1 Output
Temperature = +25°C

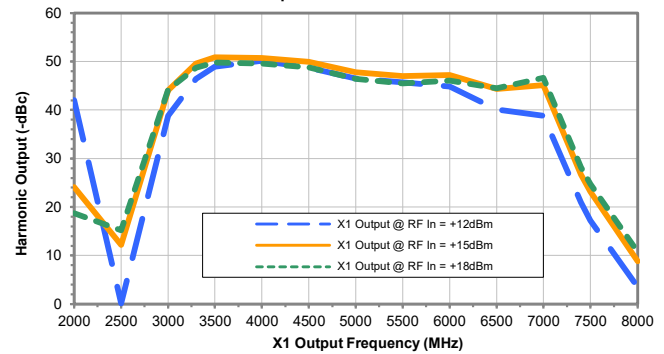

Harmonic X2 Output
Temperature = +25°C

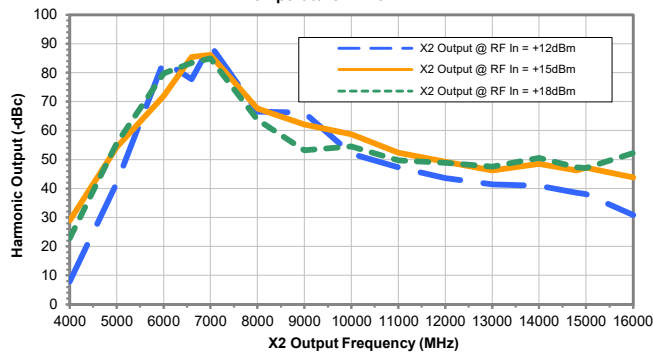

Harmonic X4 Output
Temperature = +25°C

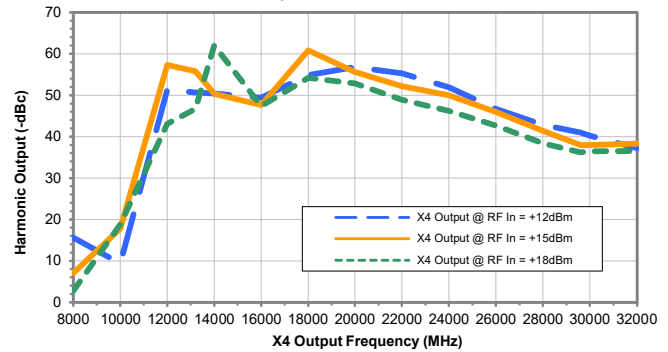



MMIC SURFACE MOUNT


X3 Frequency Multiplier

CY3-223+


50Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
RF In = +12dBm

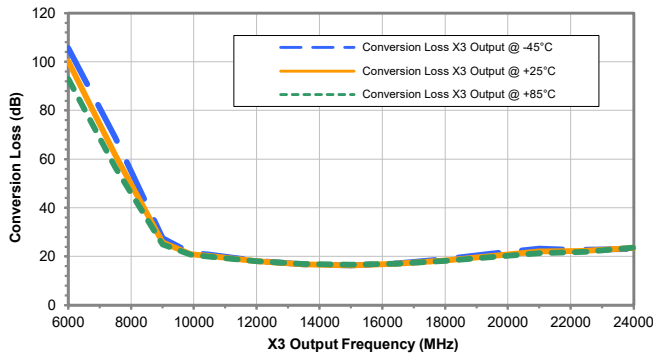


Harmonic X1 Output
RF In = +12dBm

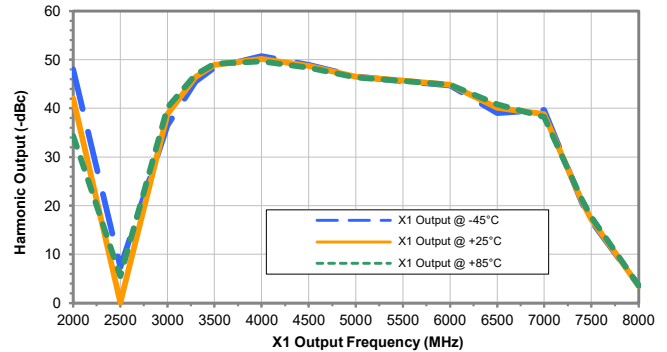

Harmonic X2 Output
RF In = +12dBm

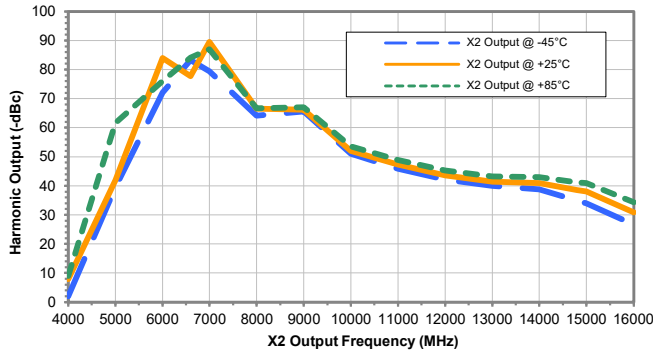

Harmonic X4 Output
RF In = +12dBm

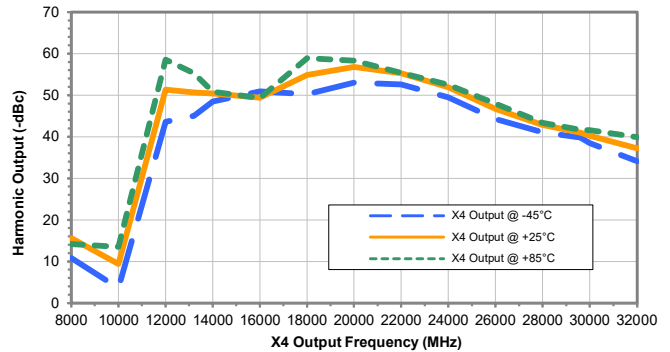



MMIC SURFACE MOUNT

X3 Frequency Multiplier


CY3-223+

Mini-Circuits


50Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
RF In = +15dBm

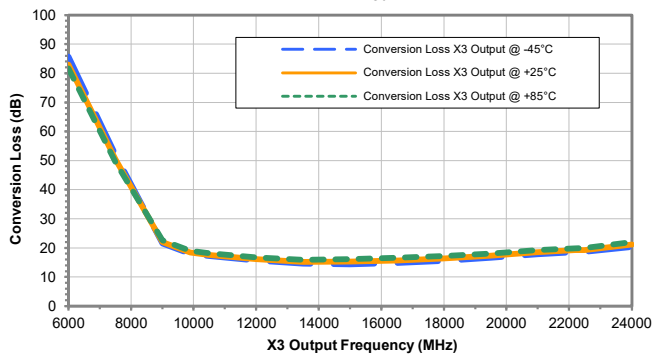


Harmonic X1 Output
RF In = +15dBm

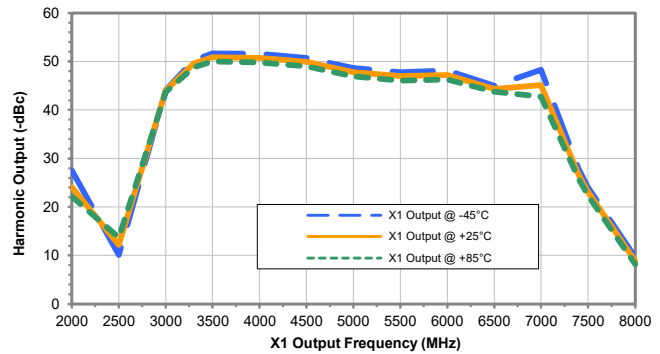

Harmonic X2 Output
RF In = +15dBm

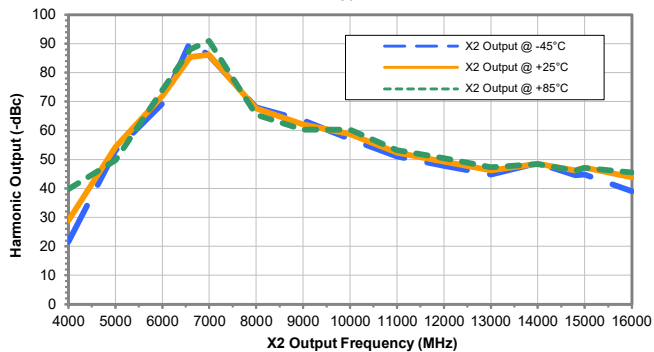

Harmonic X4 Output
RF In = +15dBm

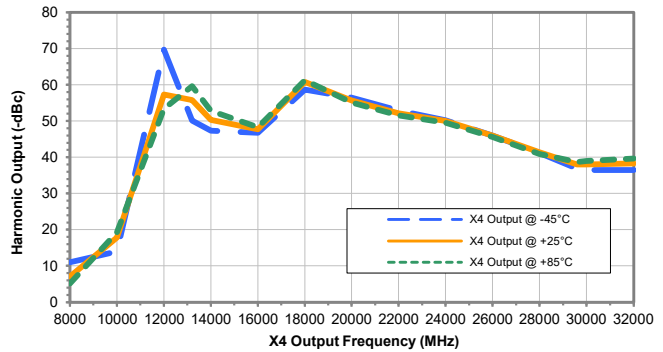



MMIC SURFACE MOUNT

X3 Frequency Multiplier


CY3-223+

Mini-Circuits


50Ω Output 10 to 22 GHz

TYPICAL PERFORMANCE CURVES


Conversion Loss X3 Output
RF In = +18dBm

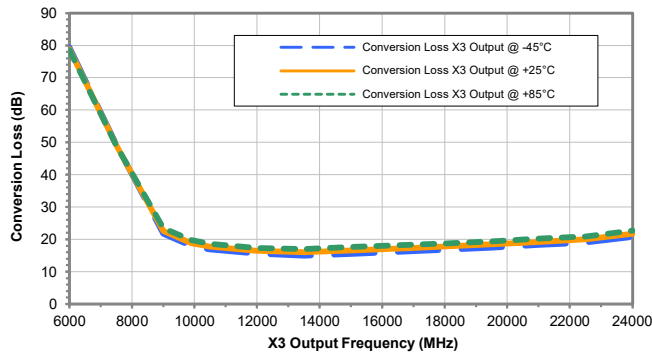


Harmonic X1 Output
RF In = +18dBm

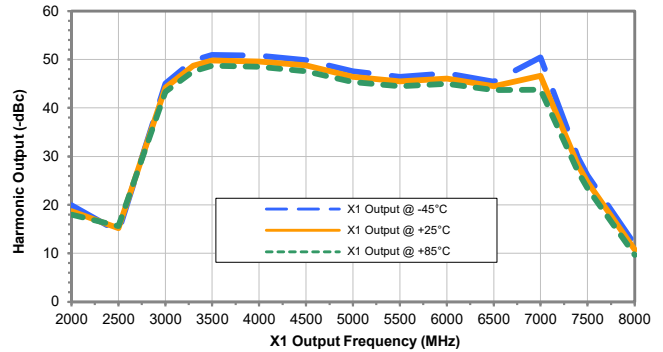

Harmonic X2 Output
RF In = +18dBm

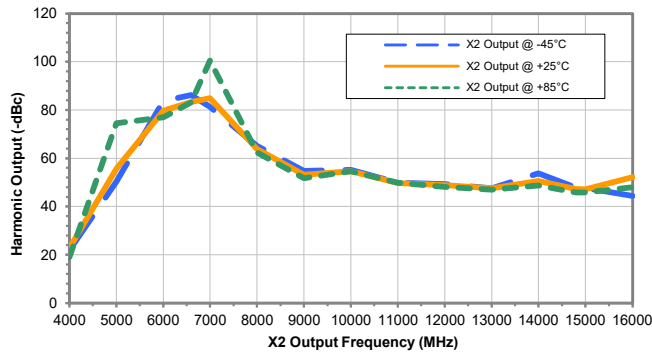

Harmonic X4 Output
RF In = +18dBm

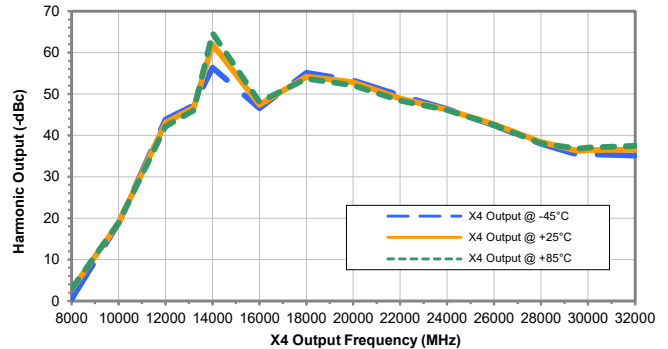



MMIC SURFACE MOUNT

X3 Frequency Multiplier

CY3-223+**50Ω Output 10 to 22 GHz****ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS [CLICK HERE](#)**

Performance Data	Data Table
	Swept Graphs
Case Style	DG1847 Plastic package, exposed paddle, lead finish: Matte-Tin
Tape & Reel	F68
Standard quantities available on reel	7" reels with 20, 50, 100, 200, 500 or 1K and 2k devices
Suggested Layout for PCB Design	PL-732
Evaluation Board	TB-CY3-223C+
Environmental Ratings	ENV08T1

ESD RATING


Human body model (HBM): Class 1B (500V to < 1000V) in accordance with ANSI/ESD 5.1-2001

Charged Device Model (CDM): Class 1B (500V to < 1000V) in accordance with ANSI/ESD 5.2-2001

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

MSL TEST FLOW CHART

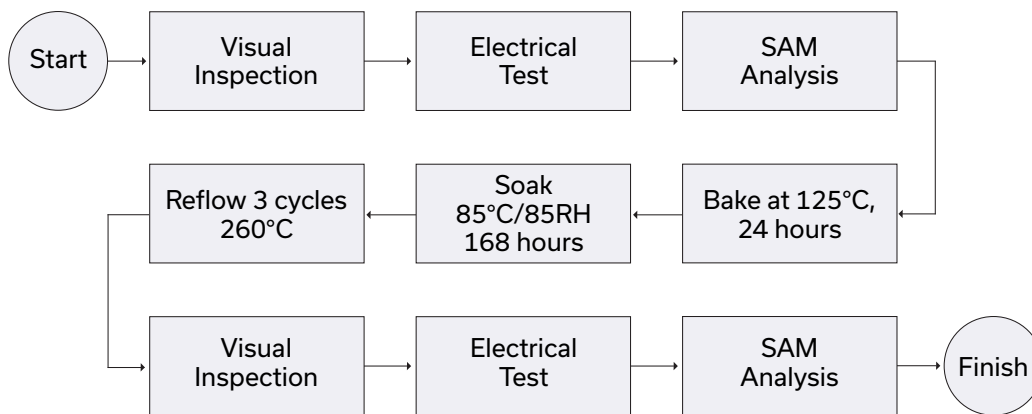

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained there in. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp
- Mini-Circuits does not warrant the accuracy or completeness of the information, text, graphics and other items contained within this document and same are provided as an accommodation and on an As is basis, with all faults.
- Purchasers of this part are solely responsible for proper storing, handling, assembly and processing of Known Good Dice (including, without limitation, proper ESD preventative measures, die preparation, die attach, wire bonding and related assembly and test activities), and Mini-Circuits assumes no responsibility therefor or for environmental effects on Known Good Dice.
- Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation by any such third-party of Mini-Circuits or its products.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[CY3-223+](#)