

Surface Mount Directional Coupler

75Ω 2 to 250 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

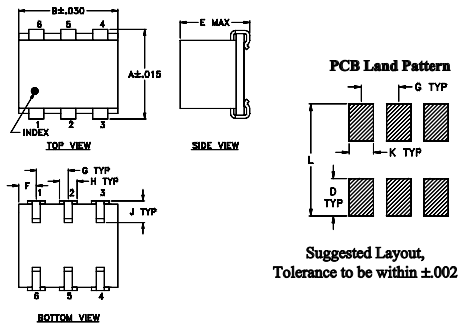


Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-33 Suggested PCB Layout (PL-044)

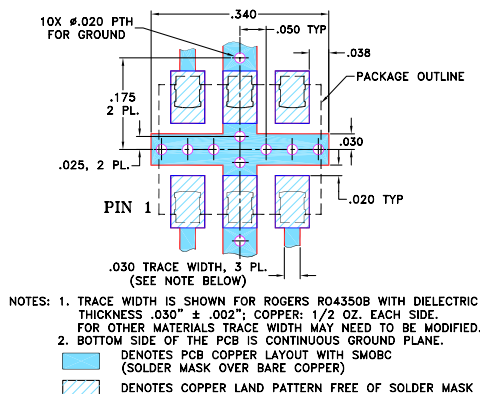

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low mainline loss, 0.3 dB typ.
- high directivity, 30 dB typ.
- excellent solderability

Applications

- communications
- level detecting
- signal sampling
- reflective power measurements

JDC-20-3-75+
JDC-20-3-75



Generic photo used for illustration purposes only

CASE STYLE: BH292

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Directional Coupler Electrical Specifications




FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U				
	f _L -f _U	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.
2-250	19.2±0.5	±0.5	0.4	0.8	0.3	0.7	0.4	0.7	24	16	30	20	20	15	1.1	0.5	1.0

L = 2-20 MHz M = 20-125 MHz U = 125-250 MHz


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
1.00	0.44	19.22	23.26	23.55	24.40	23.02
4.00	0.30	19.23	29.11	28.64	31.07	28.66
7.00	0.28	19.24	30.46	29.97	33.28	30.26
10.00	0.28	19.24	31.30	30.50	34.28	30.94
50.00	0.30	19.26	30.27	31.34	33.32	32.19
90.00	0.32	19.28	27.59	31.42	30.68	33.55
130.00	0.35	19.32	25.09	30.66	28.22	35.94
150.00	0.37	19.35	23.75	29.92	26.97	37.80
180.00	0.40	19.38	22.06	28.50	25.21	41.60
250.00	0.46	19.45	18.52	25.22	21.84	37.78

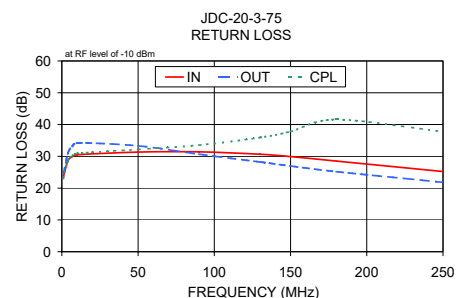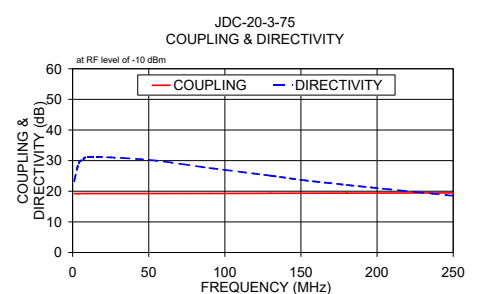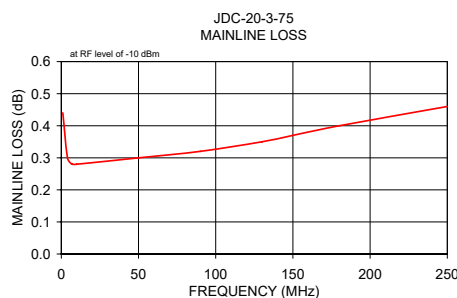

Electrical Schematic

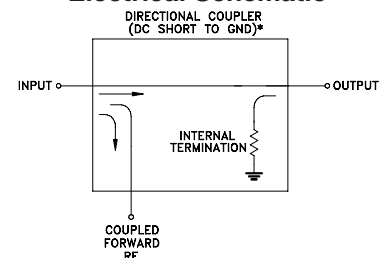

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M151107
ED-5581
JDC-20-3-75
WZ/TD/CP/AM
200413

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[JDC-20-3-75+](#)