

Surface Mount

Phase Shifter

50Ω 180° Voltage Variable 2150 to 2484 MHz

JSPHS-2484+



Generic photo used for illustration purposes only

CASE STYLE: BK276

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm max.
Control Voltage	28V


Permanent damage may occur if any of these limits are exceeded.

Pin Connections

IN	1
OUT	7
BIAS	4,6^
GROUND	2,3,5,8,9,10,11,12,13,14

^ proper operation is achieved with pins 4 or 6 or both connected to BIAS.

Outline Drawing

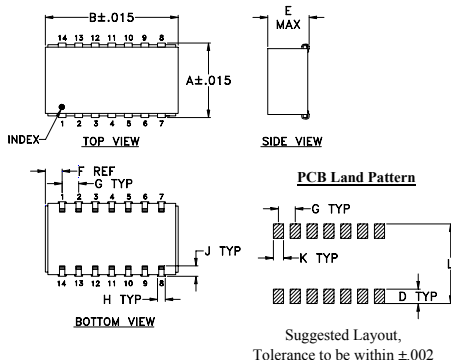


Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.450	.803	--	.100	.250	.102	.100
11.43	20.40	--	2.54	6.35	2.59	2.54

H	J	K	L	wt
.047	.065	.065	.470	grams
1.19	1.65	1.65	11.94	3.0

Demo Board MCL P/N: TB-122 Suggested PCB Layout (PL-030)

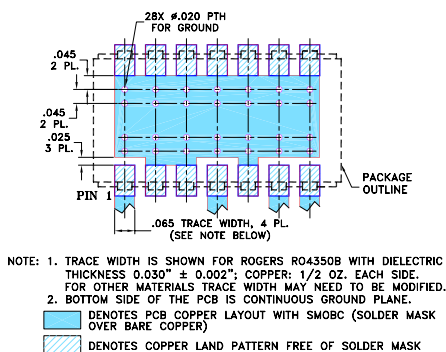

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 2.0 dB typ.
- good VSWR, 1.5:1 typ.
- J-leads for excellent solderability and strain relief
- aqueous washable

Applications

- mobile
- radio location

Phase Shifter Electrical Specifications

FREQUENCY (MHz)	PHASE RANGE (Degrees)	INSERTION LOSS (dB)	CONTROL VOLTAGE (V)	CONTROL BANDWIDTH (kHz)	VSWR (:1)
	Min.	Typ. Max.		Typ.	Typ. Max.
2150-2484	180	2.0 5.6	0-15	DC-50	1.5 2.0




Maximum operating power, 0 dBm

DC input resistance at Control port: 2000 ohms typ.


Typical Performance Data

Control Voltage (V)	Phase Shift* (Degrees)			VSWR (:1)			Insertion Loss (dB)		
	2150 MHz	2300 MHz	2484 MHz	2150 MHz	2300 MHz	2484 MHz	2150 MHz	2300 MHz	2484 MHz
0.0	0.01	0.00	0.00	1.20	1.33	1.46	1.50	1.60	1.87
1.0	5.06	4.69	4.22	1.17	1.31	1.45	1.51	1.60	1.85
2.0	10.50	9.70	8.68	1.15	1.29	1.45	1.53	1.60	1.83
3.0	17.42	16.05	14.29	1.12	1.26	1.44	1.56	1.60	1.82
4.0	27.60	25.25	22.27	1.11	1.21	1.42	1.65	1.63	1.80
5.0	42.79	38.72	33.71	1.17	1.15	1.38	1.83	1.70	1.80
6.0	63.72	56.65	48.52	1.28	1.11	1.31	2.17	1.87	1.84
7.0	89.57	77.62	65.24	1.41	1.18	1.27	2.71	2.16	1.94
8.0	119.07	99.77	82.32	1.46	1.29	1.12	3.35	2.55	2.11
9.0	151.83	122.45	99.06	1.40	1.38	1.07	3.97	2.98	2.34
10.0	187.02	145.74	115.49	1.29	1.42	1.12	4.37	3.39	2.63
11.0	222.21	169.98	135.24	1.27	1.41	1.20	4.44	3.74	2.94
12.0	254.14	195.10	148.56	1.37	1.37	1.28	4.17	3.96	3.27
13.0	280.85	220.25	165.52	1.47	1.32	1.39	3.74	4.02	3.57
14.0	302.85	244.62	183.15	1.53	1.32	1.39	3.27	3.92	3.83
15.0	320.70	266.91	201.15	1.53	1.36	1.41	2.86	3.70	4.02

* Normalized at control voltage = 0V

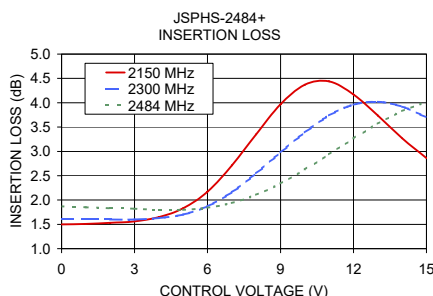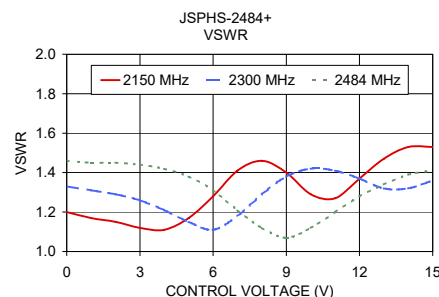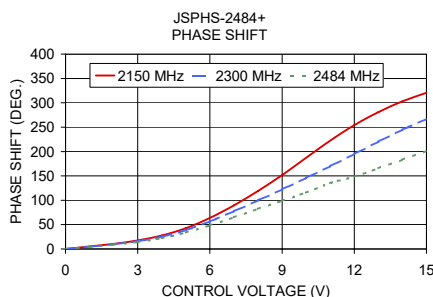

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
JSPHS-2484+
ED-13007/2
DY/CP/AM
200428

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[JSPHS-2484+](#)