



 $50\Omega$ 

DC to 3000 MHz (5000 to 5750 MHz)

## **The Big Deal**

- Low insertion loss
- · High stopband isolation
- Very small size, 0402



CASE STYLE: NK0402C

## **Product Overview**

Mini-Circuits' LDPO-33-53+ is a tiny, surface-mount diplexer with a low pass channel from DC to 3000 MHz and a high pass channel from 5000 to 5750 MHz. This model provides low passband insertion loss, high stopband rejection, and RF input power handling up to 3W. Fabricated using LTCC technology, the unit comes housed in a tiny, 0402 ceramic package with excellent thermal stability from -55 to +125°C.

# **Key Features**

Feature	Advantages
Low passband insertion loss	Ensures low signal loss through both channels
Tiny size	Saves space in dense circuit board layouts and minimizes the effects of parasitics.
Wrap-around terminations	Provides excellent solderability and easy visual inspection.
Wide operating temperature range, -55 to +125°C	Enables reliable performance in extreme environments.

#### Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.ninicircuits.com/MCLStore/terms.jsp

# **Diplexer**

# LDPO-33-53+

#### DC to 3000 MHz (5000 to 5750 MHz) $50\Omega$

#### **Maximum Ratings**


Operating Temperature	-55°C to 125°C
Storage Temperature*	-55°C to 125°C
RF Power Input**	3W

- \*Refer to product storage temperature after installation.
- Suggestion for T&R unused product storage condition: +5~+35°C,
- Humidity 45~75%RH, 12 Month max.
  Permanent damage may occur if any of these limits are exceeded.
- "Derate linearly to 1W at 125°C

#### **Pad Connections**

4
3
1
2


#### **Outline Drawing**



## Outline Dimensions (inch )

wt	G	F	Е	D	С	В	Α
grams	.022	.004	.010	.004	.015	.020	.039
.0007	0.56	0.10	0.25	0.10	0.38	0.51	1.0

#### Evaluation Board MCL P/N: TB-LDPO-33-53+ Suggested PCB Layout (PL-571)



NOTES:
1. POB IS MULTILAYER PCB, SEE STACK-UP DIAGRAM.
2. TRACE WIDTH AND GAP ARE SHOWN FOR FRA, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC HICKNESS. 003-0005. COPPER: 1/2 CZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
3. LAYERS 3 & 40 FTHE PCB ARE CONTINUOUS GROUND PLANES.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER) DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

#### **Features**

- · low insertion loss
- miniature size 0402
- · low cost
- · aqueous washable

#### **Applications**

- ISM Band
- WIFI
- Bluetooth
- Cellular

Generic photo used for illustration purposes only CASE STYLE: NK0402C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



#### Electrical Specifications<sup>1</sup> at 25°C


Par	Parameter		Frequency (MHz)	Min.	Тур.	Max.	Unit	
Pass Band	Insertion Loss	Low Pass	DC - 3000	_	0.8	1.2	4D	
		Band Pass	5000 - 5750	_	2.5	3.0	dB	
		Low Pass	DC - 3000	_	15	_		
	Return Loss	Band Pass	5000 - 5750	_	11	_	dB	
		Common	DC - 3000	_	18	_		
			5000 - 5750	_	15	_		
	·		5000 - 12000	_	17	_	dB	
Stop Band Rejection	Band Pass	DC - 3000	19	25		dB		
		7800 - 12000	15	23	_			

<sup>1.</sup> Tested on Evaluation Board TB-LDPO-33-53+

#### Typical Performance Data at 25°C

., p								
Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)					
	Low Pass Port	Band Pass Port	Common Port	Low Pass Port	Band Pass Port			
10	0.04	70.45	56.56	58.15	0.16			
50	0.08	55.54	45.75	46.53	0.14			
100	0.06	49.20	41.19	42.00	0.08			
500	0.11	35.41	26.09	26.14	0.03			
1000	0.18	30.43	21.17	21.42	0.01			
1500	0.26	28.83	19.97	20.73	0.08			
2000	0.31	29.52	21.54	22.84	0.07			
2500	0.37	35.58	27.11	30.07	0.16			
3000	0.49	31.63	29.21	28.99	0.37			
3500	0.89	17.49	19.25	17.35	0.79			
4000	2.99	7.53	13.12	7.74	2.83			
4500	11.93	2.39	12.19	2.11	9.27			
5000	27.40	1.33	17.31	1.11	14.02			
6000	19.61	1.29	41.28	1.17	22.94			
7000	15.63	7.70	3.57	1.27	2.90			
8000	23.80	26.88	0.55	1.26	0.60			
9000	30.25	20.83	0.12	1.32	0.18			
10000	25.09	22.08	0.13	0.84	0.26			
11000	28.56	25.29	0.22	0.25	0.46			
12000	40.40	31.81	0.03	0.07	0.47			


### **Block Diagram**





- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.


  B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.


  C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

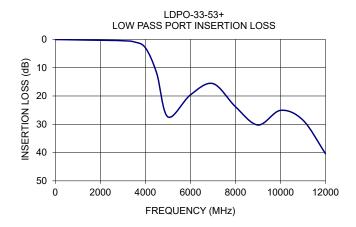

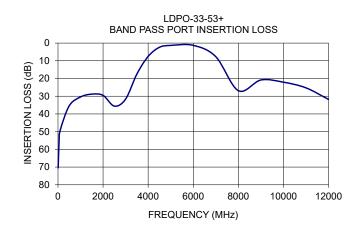

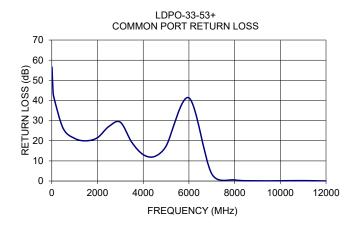

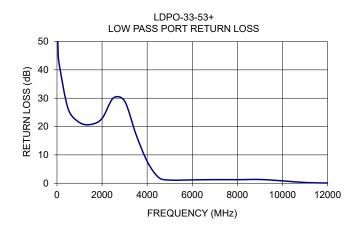

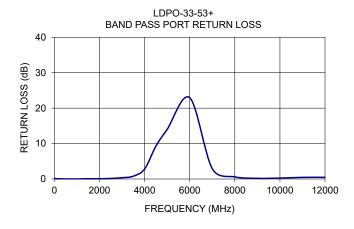

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits: