



Mini-Circuits®

CERAMIC


Low Pass Filter

LFCN-722+

50Ω DC¹ to 7200 MHz

FEATURES

- Excellent power handling, 12W
- Small size 1206 (3.2 x 1.6 mm)
- Temperature stable
- LTCC construction



Generic photo used for illustration purposes only

CASE STYLE: FV1206-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Harmonic rejection
- Transmitters/receivers
- Lab use

ELECTRICAL SPECIFICATIONS^{1,2} AT 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-7200	—	1.9	3.2	dB
	Freq. Cut-Off	F2	7940	—	3.0	—	dB
	VSWR	DC-F1	DC-7200	—	2.0	—	:1
Stop Band	Rejection Loss	F3	8980	—	20	—	dB
		F4-F5	9270-10060	25	35	—	
		F6	15000	—	30	—	

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


2. Measured on Mini-Circuits Characterization Test Board TB-618+.

MAXIMUM RATINGS


Parameter	Ratings
Operating temperature	-55°C to 100°C
Storage temperature	-55°C to 100°C
RF Power Input ³	12 W max. at 25°C

3. Passband rating, derate linearly to 6W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

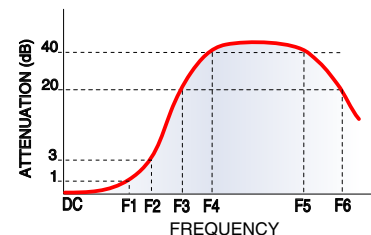

FUNCTIONAL SCHEMATIC

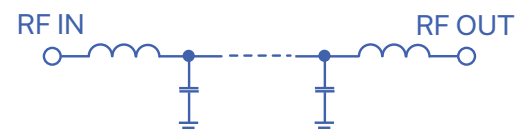

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-011891
LFCN-722+
AD/CP/AM
220209

PAGE 1 OF 3



Mini-Circuits

CERAMIC

Low Pass Filter


LFCN-722+

PIN CONNECTIONS


RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: N/A


DEMO BOARD MCL P/N: TB-618+
SUGGESTED PCB LAYOUT (PL-363)

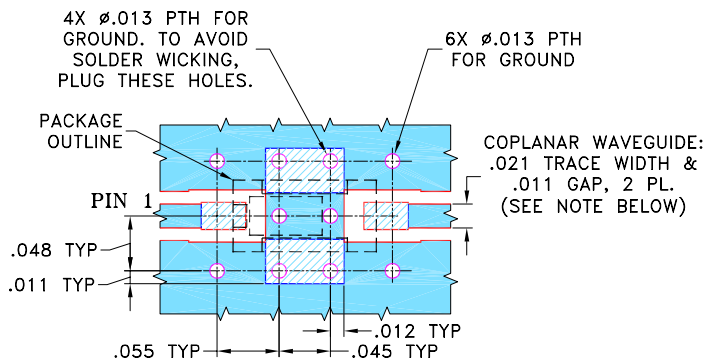

OUTLINE DRAWING

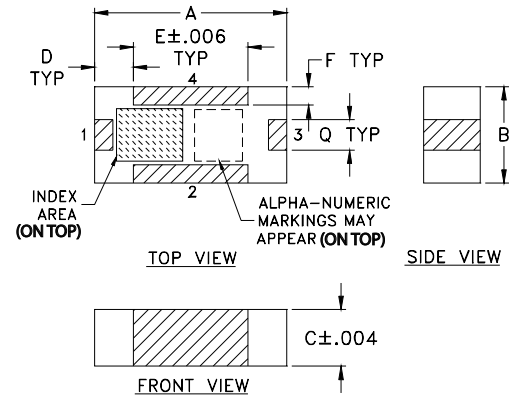

PCB Land Pattern

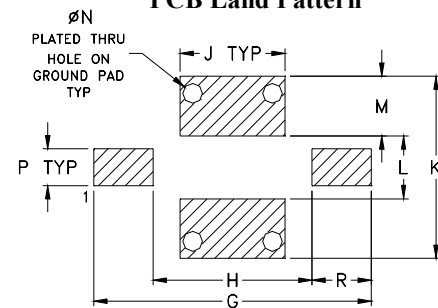

Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G	H	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75
K	L	M	N	P	Q	R	wt	
.119	.041	.039	.013	.024	.020	.039	grams	
3.02	1.04	0.99	0.33	0.61	0.51	0.99	.020	

TAPE & REEL INFORMATION: F75





CERAMIC

Low Pass Filter

LFCN-722+

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.03	1.01
20	0.03	1.01
100	0.04	1.02
500	0.13	1.13
1000	0.24	1.27
3000	0.40	1.06
5000	1.13	2.01
7000	1.61	1.90
7200	1.86	2.04
7940	2.97	1.53
8980	40.03	12.57
9270	35.44	14.95
10060	38.50	17.62
12000	34.37	27.25
13000	33.44	31.09
14000	33.59	25.12
15000	34.09	18.20

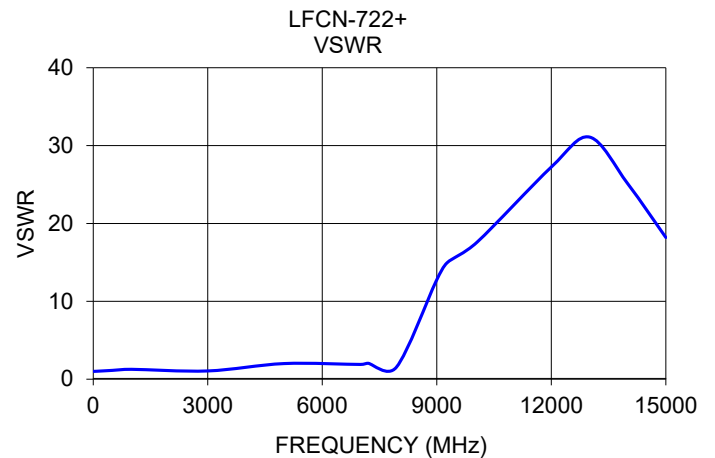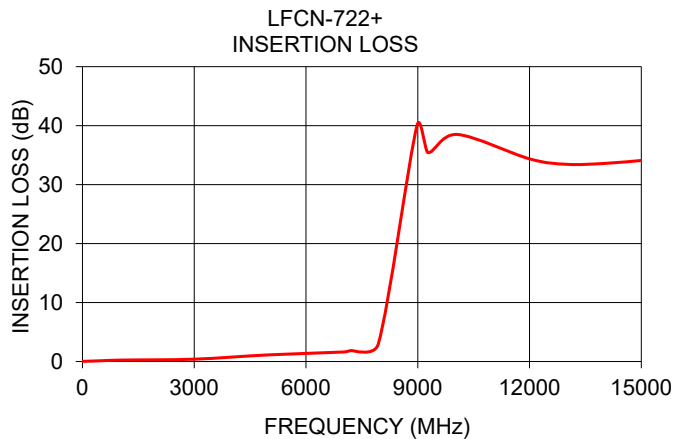

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[LFCN-722+](#)