


LOW PASS FILTERS

Designer's Kit K3-LFCN+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION!

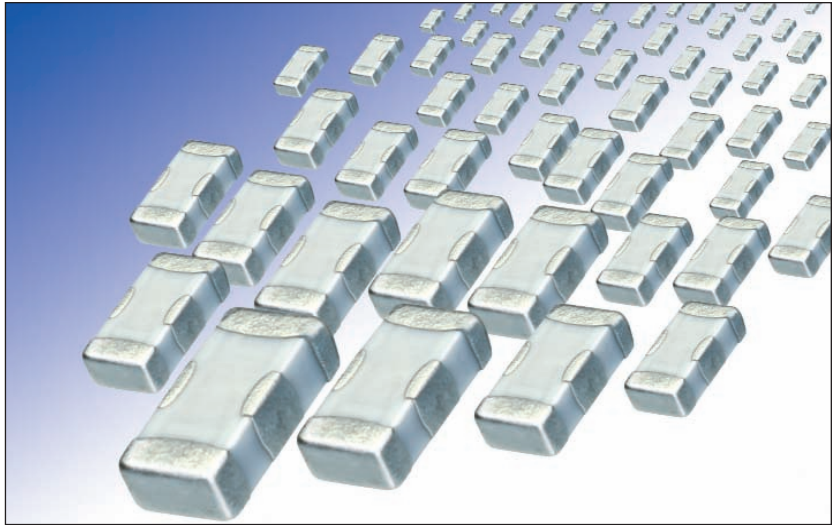

Passband DC to 630MHz

LFCN+ Features

- Wideband, 50 Ω
- LTCC Low Temperature Co-fired Ceramic
- Small size (L)0.12" x (W)0.06"
- Temperature stable
- Repeatable performance
- Excellent power handling
- Hermetically sealed
- 7 sections
- Low cost



All models are
RoHS compliant

Kit K3-LFCN+ Electrical specifications of each model (11 models, 5 of each, 55 total)

Model	Passband (MHz)	fco, (MHz) Nom.	Stopband (MHz) (loss, dB)			VSWR (:1)		Power Input* (W)
	(loss < 1 dB) [†] Max.	(loss 3dB) Typ.	f 20 Min.	40 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.	Max.
LFCN-80+	DC-80	145	200	225-1550	4500	20	1.2	8.5
LFCN-95+	DC-95	165	230	255-1600	4500	20	1.2	8.5
LFCN-105+	DC-105	180	250	265-1650	4750	20	1.2	8.5
LFCN-120+	DC-120	195	280	300-1850	4750	20	1.2	8.5
LFCN-225+	DC-225	350	460	510-2500	5500	20	1.2	8.5
LFCN-320+	DC-320	460	560	640-2500	5300	20	1.2	8.5
LFCN-400+	DC-400	560	660	680-3000	5500	20	1.2	8.5
LFCN-490+	DC-490	650	800	880-2500	6000	20	1.2	8.5
LFCN-530+	DC-530	700	820	945-3000	6000	20	1.2	8.5
LFCN-575+	DC-575	770	900	1050-3200	5500	20	1.2	8.5
LFCN-630+	DC-630	830	1000	1050-3500	6000	20	1.2	8.5

Protected under U.S. Patent 6,943,646

[†] LFCN-530+, -575+, and -630+ Loss < 1.2dB.

* Passband rating, derate linearly to 3.5W at 100°C ambient.

 **Mini-Circuits®**
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

REV. OR
M104869
K3-LFCN+

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[K3-LFCN+](#)