

Coaxial

Adapter, N-FEM to BNC-MALE

50Ω DC to 2 GHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- excellent VSWR, 1.05:1 typ.
- low insertion loss, 0.06 dB typ.
- brass body, nickel plated

Applications

- interconnection of RF cables and equipment
- connector saver

NF-BM50+



Generic photo used for illustration purposes only


CASE STYLE: DJ1011

Connectors	Model
Conn1 N-FEM	Conn2 BNC-MALE NF-BM50+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

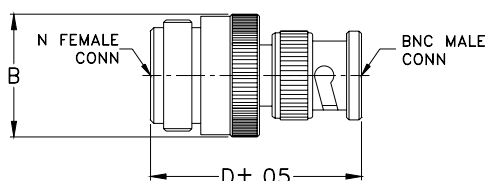

Outline Dimensions (inch/mm)



A	B	C	D	E	wt
--	.68	--	1.36	--	grams
--	17.27	--	34.54	--	31.8

Electrical Specifications T_{AMB}=25°C

FREQUENCY (GHz)	INSERTION LOSS (dB)	VSWR (:1) Max.
f _L -f _U	Typ.	DC-2 GHz
DC-2	0.06	1.15

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		N-FEM	BNC-MALE
0.30	0.08	1.00	1.00
1.00	0.04	1.00	1.00
5.00	0.03	1.00	1.00
10.00	0.03	1.00	1.00
50.00	0.03	1.01	1.01
100.00	0.03	1.01	1.01
200.00	0.04	1.02	1.01
300.00	0.04	1.03	1.01
400.00	0.04	1.04	1.02
500.00	0.04	1.05	1.02
600.00	0.05	1.06	1.02
700.00	0.05	1.06	1.02
800.00	0.06	1.07	1.03
900.00	0.06	1.07	1.03
1000.00	0.06	1.08	1.03
1200.00	0.06	1.08	1.03
1400.00	0.06	1.08	1.03
1600.00	0.07	1.08	1.03
1800.00	0.07	1.07	1.02
2000.00	0.07	1.06	1.01

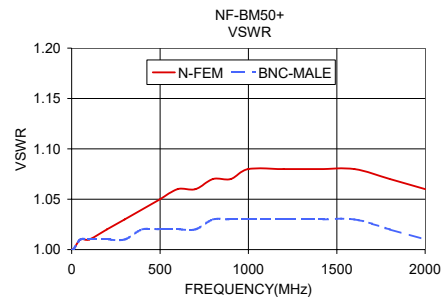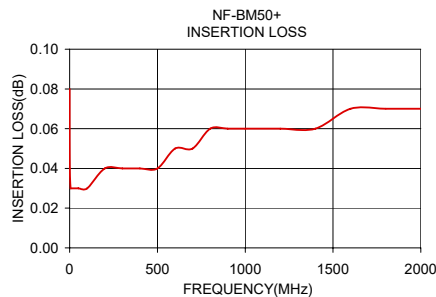

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/VCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
NF-BM50+
SS/TD/AM
200511

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[NF-BM50+](#)