


Power Splitter/Combiner

2 Way-90° 50Ω 800 to 1375 MHz

QCN-12D+



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost
Reel Size 7" Devices/Reel 20, 50, 100, 200, 500, 1000, 3000


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.
* Derate linearly to 7W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3


Outline Drawing

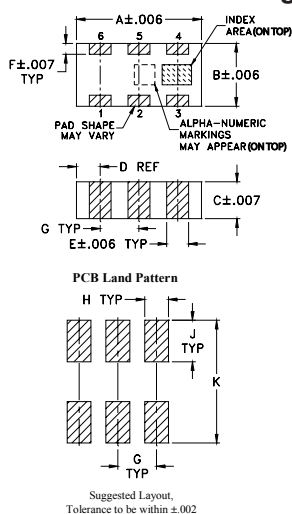

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)

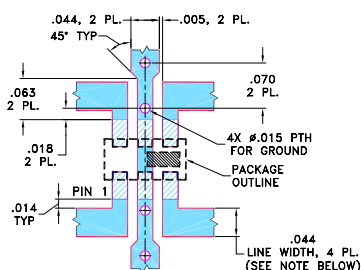

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"

Applications

- cellular
- satellite distribution
- GSM
- balanced amplifiers
- modulators

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)
f_L - f_U	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Typ.
800-1375					
800-1000	19 14	0.4 0.8	9 12	0.4 0.9	1.3
1000-1375	19 14	0.6 1.0	9 13	0.7 1.0	1.5

1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2					
800.00	3.30	3.72	0.42	17.70	82.30	1.26	1.31
810.00	3.33	3.68	0.35	17.77	82.27	1.26	1.31
830.00	3.35	3.60	0.24	17.90	82.14	1.25	1.31
870.00	3.46	3.53	0.07	18.29	82.10	1.24	1.30
900.00	3.52	3.43	0.08	18.58	82.03	1.22	1.29
930.00	3.54	3.38	0.16	18.85	81.82	1.21	1.29
960.00	3.63	3.36	0.27	19.22	81.93	1.20	1.28
990.00	3.63	3.28	0.35	19.52	81.65	1.19	1.28
1040.00	3.72	3.28	0.44	20.15	81.66	1.17	1.27
1100.00	3.73	3.26	0.46	20.91	81.43	1.15	1.27
1160.00	3.69	3.26	0.44	21.62	81.05	1.13	1.27
1220.00	3.68	3.35	0.33	22.25	81.02	1.12	1.28
1280.00	3.61	3.53	0.08	22.51	80.98	1.12	1.29
1340.00	3.45	3.72	0.27	22.12	80.57	1.14	1.31
1375.00	3.39	3.8	0.42	21.66	80.68	1.17	1.33

1. Total Loss = Insertion Loss + 3dB splitter loss.

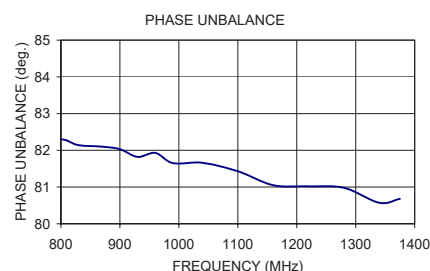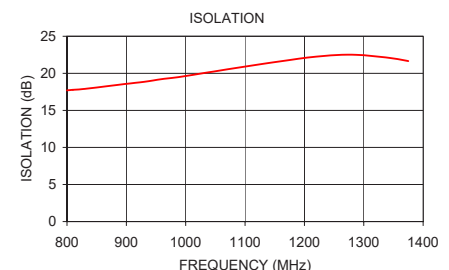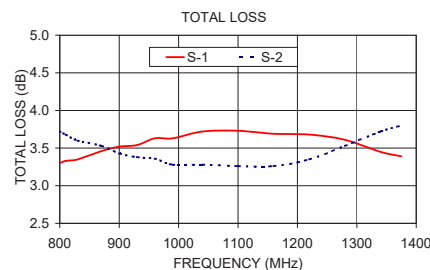

electrical schematic (Note 1)



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. K
M151107
QCN-12D+
ED-10849/2
AD/CP/AM
150923

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[QCN-12D+](#)