


Ultra-Small Ceramic Power Splitter/Combiner

2 Way-90° 50Ω 220 to 470 MHz

QCN-3+



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.
* Derate linearly to 7W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

Product Marking: SB


Outline Drawing

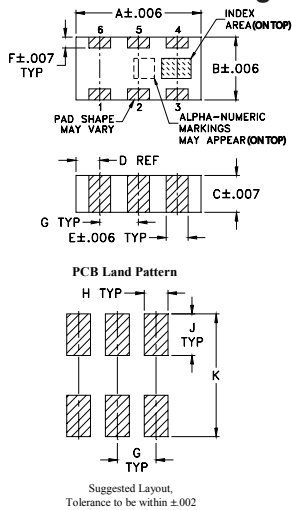

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)

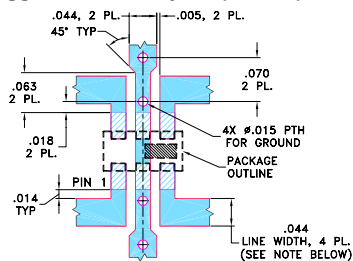

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- high isolation, 25 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"

Applications




- balanced amplifiers
- modulators
- VHF
- defense communication

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		VSWR (:1)
$f_L - f_U$	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.
220-470	24	18	0.6	0.8	1	8	0.5	1.7	1.2
270-350	25	18	0.4	0.7	3	5	0.7	1.0	1.2
350-450	30	20	0.6	0.8	5	8	0.5	1.0	1.2


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
220.00	3.91	3.00	0.91	23.23	90.40	1.07	1.12	1.07
230.00	3.77	3.11	0.67	23.41	90.55	1.06	1.12	1.06
250.00	3.55	3.31	0.23	23.85	90.86	1.05	1.11	1.06
260.00	3.45	3.41	0.05	24.11	91.02	1.05	1.11	1.05
270.00	3.37	3.49	0.12	24.37	91.18	1.04	1.10	1.05
290.00	3.24	3.64	0.39	24.96	91.53	1.04	1.10	1.04
310.00	3.16	3.76	0.60	25.67	91.88	1.03	1.09	1.03
330.00	3.12	3.83	0.72	26.46	92.26	1.03	1.08	1.03
350.00	3.11	3.88	0.77	27.38	92.67	1.04	1.08	1.02
370.00	3.14	3.88	0.74	28.47	93.12	1.05	1.07	1.02
390.00	3.22	3.85	0.63	29.82	93.63	1.07	1.07	1.02
410.00	3.35	3.78	0.42	31.55	94.16	1.09	1.07	1.01
430.00	3.55	3.66	0.11	33.99	94.80	1.11	1.07	1.01
450.00	3.82	3.50	0.32	37.16	95.56	1.14	1.07	1.02
470.00	4.19	3.29	0.90	38.74	96.48	1.17	1.08	1.02

1. Total Loss = Insertion Loss + 3dB splitter loss.

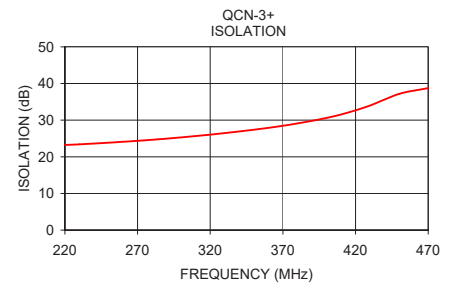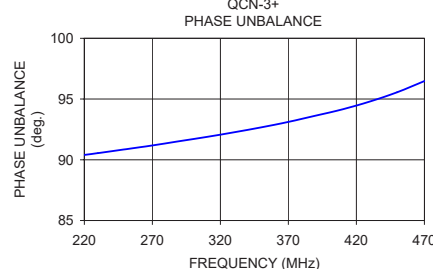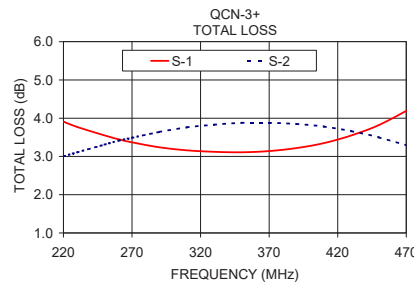

electrical schematic



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M162629
QCN-3+
AD/CP/AM
170627

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[QCN-3+](#)