

Low Pass Filter

50Ω DC to 137 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8

Outline Drawing

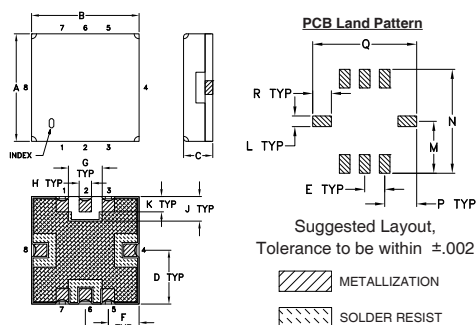



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.91	2.54	2.79	1.02	2.03

K	L	M	N	P	Q	R	wt.
.050	.040	.195	.390	.120	.390	.070	grams
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.25

Note: Please refer to case style drawing for details

Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)

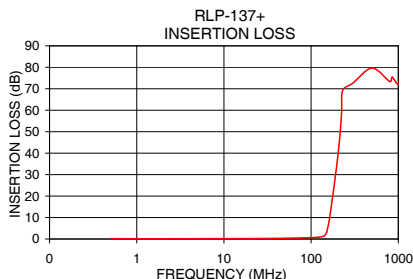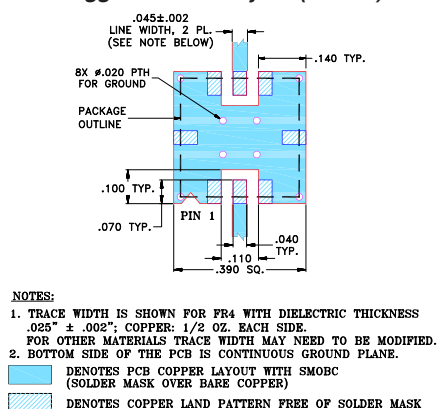

Features

- high rejection
- sharp insertion loss roll off
- excellent VSWR, 1.1:1 typ. @ passband
- aqueous washable

Applications

- wireless communications
- receivers / transmitters

RLP-137+



Generic photo used for illustration purposes only
CASE STYLE: GP731

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500, 1000


Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOPBAND (MHz)		VSWR (:1)	
		(Loss > 20dB)	(Loss > 40dB)	Passband Typ.	Stopband Typ.
DC - 137	150	190 - 215	215 - 1000	1.1	20

Typical Frequency Response



Functional Schematic




Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	$\bar{x}$	σ			
0.5	0.14	0.01	36.14	2.0	4.84
50.0	0.33	0.00	30.73	5.0	4.65
80.0	0.50	0.01	25.48	10.0	4.57
110.0	0.72	0.01	33.01	20.0	4.60
137.0	1.23	0.03	38.14	30.0	4.64
146.0	2.04	0.10	12.80	40.0	4.72
150.0	2.96	0.15	8.23	50.0	4.86
151.0	3.28	0.17	7.33	55.0	4.92
161.0	8.46	0.25	2.36	60.0	5.00
175.0	18.51	0.26	0.93	70.0	5.20
183.0	24.28	0.26	0.72	80.0	5.44
190.0	29.31	0.27	0.63	90.0	5.77
200.0	36.60	0.29	0.53	100.0	6.24
215.0	48.99	0.49	0.45	110.0	6.87
300.0	72.60	3.25	0.27	120.0	7.74
500.0	79.63	5.04	0.14	130.0	9.05
800.0	73.36	5.27	0.13	137.0	10.58
1000.0	72.09	4.99	0.15	140.0	11.46

RLP-137+ RETURN LOSS



RLP-137+ GROUP DELAY

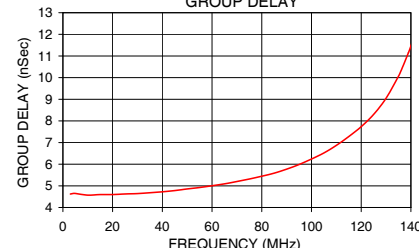

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[RLP-137+](#)