


DC Pass, High Power Bi-Directional Coupler SCBD-20-272HP+

50Ω Up to 100W 1750 to 2750 MHz

The Big Deal

- High power handling, 100W
- Low mainline loss, 0.25 dB
- High directivity, 25 dB
- Excellent return loss, up to 35 dB (input/output/



CASE STYLE: JB1233-1

Product Overview

Mini-Circuits' SCBD-20-272HP+ high-power bi-directional coupler provides high power handling up to 100W, low mainline loss, excellent return loss, and good directivity. Covering frequencies from 1750 to 2750 MHz, it supports a wide variety of applications from PCS and ISM to cable TV relay and more. The coupler is designed into an open printed laminate (0.70 x 0.32 x 0.20") with wrap-around terminations for good solderability and easy visual inspection.

Key Features

Feature	Advantages
Wideband, 1750 to 2750 MHz	SCBD-20-272HP+ supports a wide range of system and lab applications.
Low mainline loss, 0.17 – 0.25 dB	Provides excellent through-path signal power transmission.
High directivity, 25 dB	High directivity allows accurate signal sampling through the coupled port with minimal measurement error.
Excellent return loss, 28 - 35 dB (input/output/coupling)	Provides excellent matching for 50Ω systems and minimal signal reflection.
High power handling, 100W	Usable in systems with a wide range of high-power requirements.
DC current passing up to 2A	Suitable for use in systems where DC power is needed through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



50Ω Up to 100W 1750 to 2750 MHz

Maximum Ratings

Operating Temperature, case -55°C to 85°C

Storage Temperature -55°C to 100°C

DC Current 2A


*Case temperature is defined as temperature on ground leads.
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

INPUT	1,2,3,4
OUTPUT	2,1,4,3
COUPLED IN	4,3,2,1
COUPLED OUT	3,4,1,2
GROUND	5

Product Marking: SCBD-01+

Outline Drawing

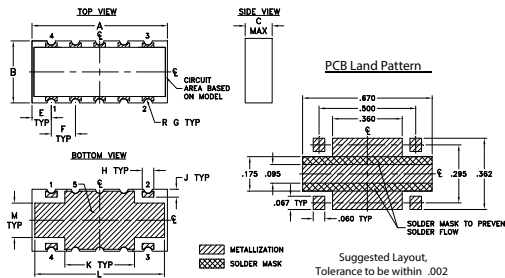


Outline Dimensions (inch mm)

A	B	C	E	F	G
.70	.32	.14	.100	.125	.022
17.78	8.13	3.56	2.54	3.18	0.56
H	J	K	L	M	wt
.060	.040	.360	.670	.175	grams
1.52	1.02	9.14	17.02	4.45	0.80

Demo Board MCL P/N: TB-774+

Suggested PCB Layout (PL-423)**

** Wraparound solder on ground pins may not be shown

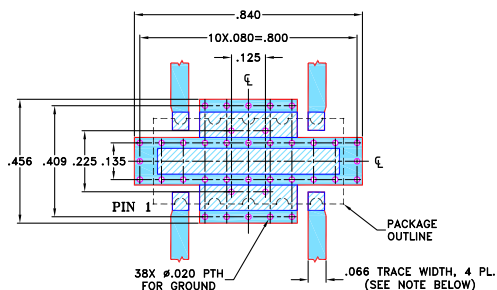

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030"±.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wide frequency range, 1750 to 2700 MHz
- high directivity, 25 dB typ.
- good return loss
- high power, up to 100W
- DC current pass through input to output

Applications

- PCS
- ISM
- cable TV relay
- federal communication



Generic photo used for illustration purposes only

CASE STYLE: JB1233-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		1750		2750	MHz
Mainline Loss ¹	1750-2050	—	0.17	0.25	dB
	2050-2750	—	0.25	0.35	dB
Coupling	1750-2050	—	20.2±0.6	—	dB
	2050-2750	—	18.6±0.8	—	dB
Coupling Flatness (±)	1750-2050	—	0.6	0.9	dB
	2050-2750	—	0.8	1.2	dB
Directivity	1750-2050	22	30	—	dB
	2050-2750	18	24	—	dB
Return Loss (Input)	1750-2050	20	35	—	dB
	2050-2750	20	28	—	dB
Return Loss (Output)	1750-2050	20	35	—	dB
	2050-2750	20	29	—	dB
Return Loss (Coupling)	1750-2050	20	35	—	dB
	2050-2750	20	28	—	dB
Input Power ² (up to +65°C case temp.)	1750-2750	—	—	100	W
Input Power (up to +85°C case temp.)	1750-2750	—	—	64	W

1. Include coupling loss.

2. At 65°C with no DC. Derate linearly to 75W (1750-2750 MHz) at 65°C with 2A DC current.




Electrical Schematic

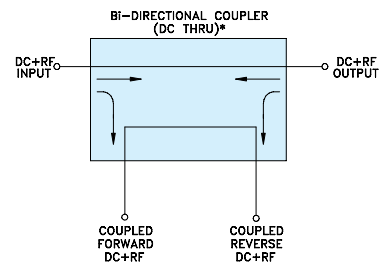

* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
1750	0.11	20.64	20.60	40.44	42.13	50.19	49.60	42.46	47.50
1800	0.11	20.44	20.40	40.37	48.67	43.41	44.78	40.61	53.59
1850	0.11	20.25	20.22	38.93	59.59	38.62	39.50	37.65	45.12
1900	0.12	20.07	20.04	36.34	45.01	36.47	36.38	36.72	39.97
2000	0.12	19.72	19.68	33.04	37.23	32.28	33.08	34.83	35.24
2050	0.13	19.56	19.52	32.68	36.32	31.46	32.10	34.90	33.94
2100	0.14	19.40	19.36	32.66	37.07	31.56	31.91	34.40	32.93
2200	0.15	19.14	19.11	31.67	35.29	31.38	31.40	35.20	31.86
2300	0.17	18.89	18.86	29.24	31.05	33.07	32.32	37.41	32.09
2400	0.18	18.67	18.64	27.18	27.67	34.28	33.65	43.46	33.16
2500	0.19	18.40	18.39	24.12	24.99	39.50	38.35	57.59	36.84
2550	0.19	18.30	18.29	23.35	23.83	48.44	42.96	44.98	39.91
2600	0.21	18.20	18.18	22.36	22.83	78.51	59.89	39.62	45.14
2700	0.21	18.00	17.99	20.69	21.23	36.43	37.12	33.99	42.39
2750	0.23	17.91	17.89	20.07	20.37	33.04	33.50	31.94	37.70

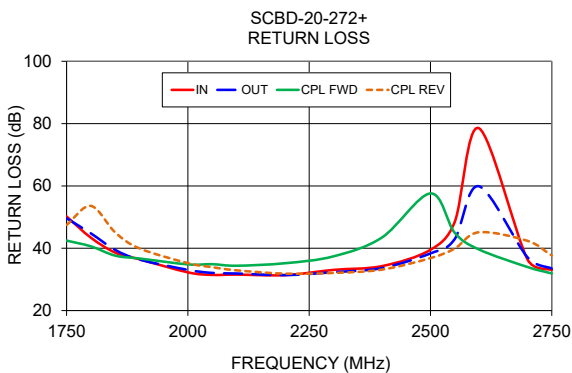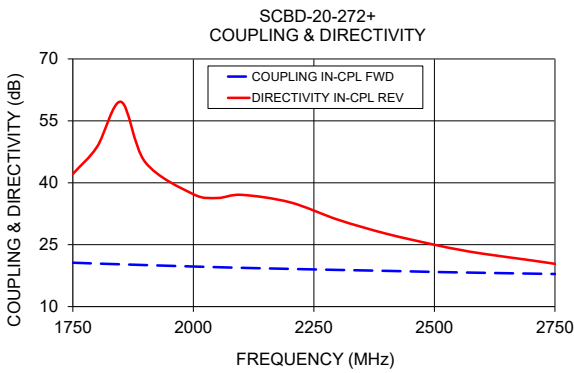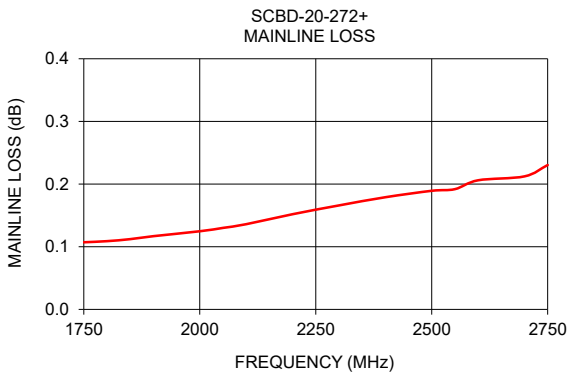

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SCBD-20-272HP+](#)