



Mini-Circuits

CERAMIC

Power Splitter/Combiner

SCG-3-272+

3 Way-0° 50Ω 1800 to 2700 MHz

THE BIG DEAL

- Isolation Resistor, External 150Ω
- Low Insertion Loss, 1.1 dB Typ.
- Excellent Amplitude Unbalance, 0.4 dB Typ.
- Excellent Phase Unbalance, 5 Deg. Typ.
- High Isolation, 16 dB Typ.
- ESD Non-Sensitive
- Temperature Stable LTCC Technology
- Wrap Around Terminations for Excellent Solderability
- Low Cost



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- ISM
- WLAN

PRODUCT OVERVIEW

Mini-Circuits' new LTCC 0° Power Splitter, model SCG-3-272+, offers industry leading combination of operating performance and size. The outstanding phase and amplitude unbalance make this component a versatile building block for use in a variety of systems and sub-system designs.

KEY FEATURES

Feature	Advantages
Small Size	Offered in the package size, SCG-3-272+ offers an industry leading combination of size, power handling, and frequency. The small footprint allows for reduced parasitics in systems with improved performance and simplified layout.
Wrap-Around Terminations	Provides excellent solderability and easy visual inspection.
LTCC Construction	Provides repeatable performance in the rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes.





Mini-Circuits

CERAMIC

Power Splitter/Combiner

SCG-3-272+

3 Way-0° 50Ω 1800 to 2700 MHz

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1800		2700	MHz
Insertion Loss, Above 4.8 dB	1800-2700		1.1	1.7	dB
Isolation	1800-2700	11	16		dB
Phase Unbalance	1800-2700		5	10	Degree
Amplitude Unbalance	1800-2700		0.4	0.85	dB
Return Loss (Input)	1800-2700		10		dB
Return Loss (Output)	1800-2700		13.5		dB


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Power Input (as a Splitter)	2 W ¹ max.

1. Derate linearly to 0.7 W at +125°C ambient, power input as combiner is limited by rating of external resistor 150Ω resistor.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

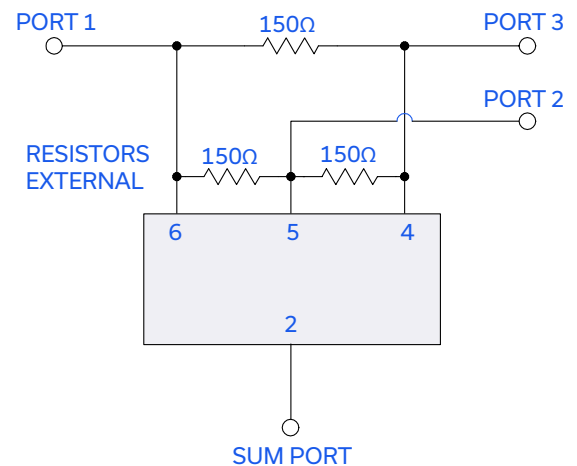



Mini-Circuits®

CERAMIC

Power Splitter/Combiner

SCG-3-272+


3 Way-0° 50Ω 1800 to 2700 MHz

PAD CONNECTIONS

SUM PORT	2
PORT 1	6
PORT 2	5
PORT 3	4
GROUND	1,3
PORT 1-2, 2-3, 1-3	Resistor external 150Ω

PRODUCT MARKING: PN


DEMO BOARD MCL P/N: TB-SCG-3-272+
SUGGESTED PCB LAYOUT (PL-621)

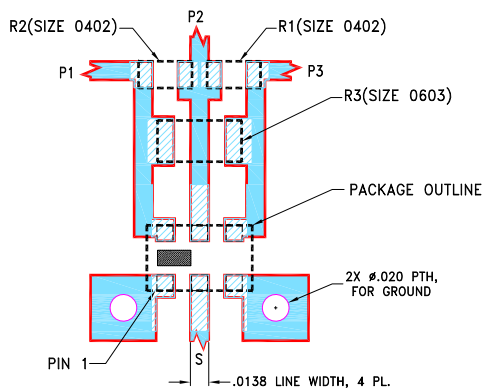

NOTES:

1. LINE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .0066±.0007. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS LINE WIDTH MAY NEED TO BE MODIFIED.
 2. UNIT FOOT PRINT IS OPTIMIZED FOR PERFORMANCE AND IS DIFFERENT FROM CASE STYLE GE0805C-1 RECOMMENDATIONS.
 3. CHIP COMPONENT FOOT PRINT IS SHOWN FOR REFERENCE. FOR COMPONENT VALUE REFER TO TB-1018+.
 4. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

OUTLINE DRAWING

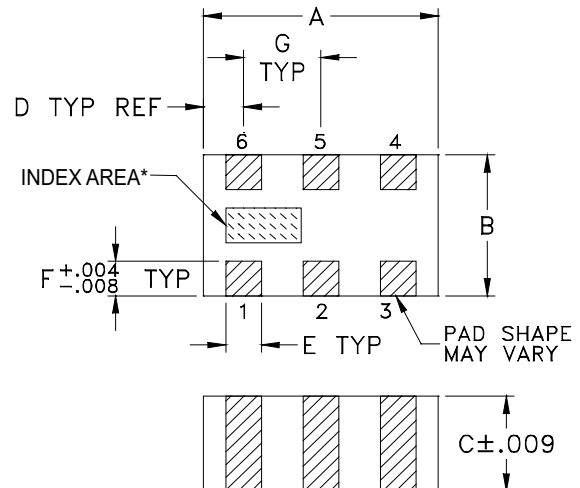

*Shape of index marking may vary

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F	G	wt
.079	.049	.033	.014	.012	.012	.026	grams
2.01	1.24	0.84	0.36	0.30	0.30	0.65	.008

TAPE & REEL INFORMATION: F74



Mini-Circuits

CERAMIC

Power Splitter/Combiner

SCG-3-272+




3 Way-0° 50Ω

1800 to 2700 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ² (dB)			Amplitude Unbalance (dB)	Isolation (dB)			Phase Unbalance (deg.)	Return Loss (dB)		
	S-1	S-2	S-3		1-2	1-3	2-3		S	1	2
1800	5.58	5.53	5.42	0.16	16.52	17.27	17.94	1.86	10.64	26.03	25.23
1900	5.51	5.46	5.34	0.17	17.73	18.86	19.60	1.92	11.55	24.20	23.69
2000	5.46	5.40	5.27	0.18	19.14	20.79	21.67	1.97	12.61	22.68	22.47
2100	5.41	5.35	5.22	0.19	20.80	23.26	24.34	2.02	13.89	21.45	21.35
2200	5.38	5.32	5.18	0.20	22.66	26.32	27.69	2.09	15.19	20.34	20.42
2300	5.37	5.31	5.16	0.21	24.64	29.52	30.82	2.13	16.30	19.33	19.42
2400	5.38	5.32	5.16	0.22	26.03	29.51	29.55	2.19	16.55	18.35	18.52
2500	5.43	5.37	5.20	0.22	25.87	26.39	26.00	2.31	15.68	17.36	17.52
2600	5.51	5.45	5.28	0.23	24.27	23.39	23.04	2.43	14.05	16.36	16.56
2700	5.63	5.58	5.40	0.23	22.32	21.09	20.81	2.55	12.21	15.32	15.51

2. Total Loss = Insertion Loss + 4.8 dB splitter loss.

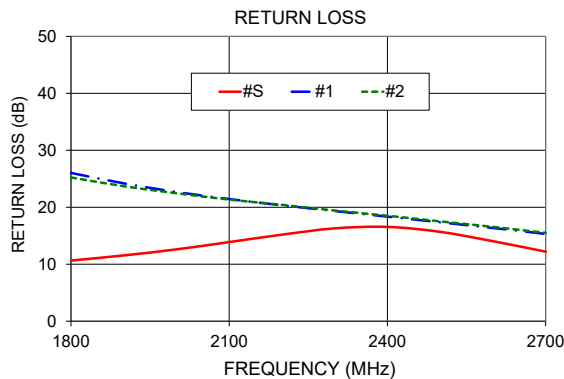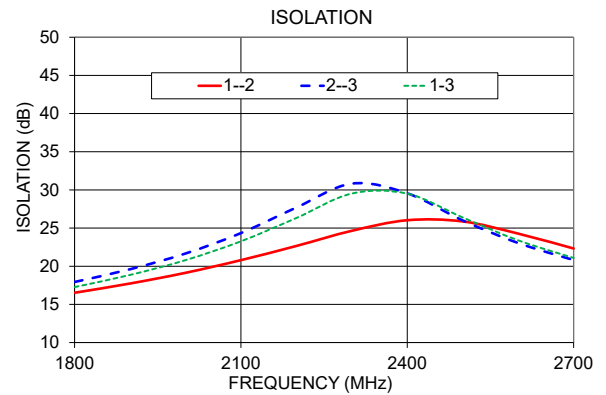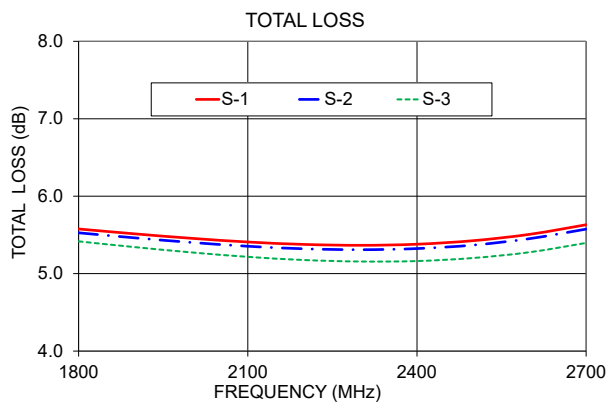

- NOTES**
- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SCG-3-272+](#)