

Coaxial

Low Pass Filter

50Ω DC to 48 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- good attenuation rate, 1.35 typ. 20dB/3dB BW ratio
- rugged shielded case
- other SLP models available with wide selection of cut-off frequencies

Applications

- lab use
- test equipment
- video equipment



CASE STYLE: FF99

Connectors	Model	Price	Qty.
SMA	SLP-50(+)	\$34.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-48	55	70-90 90-200	1.7 18


Outline Drawing

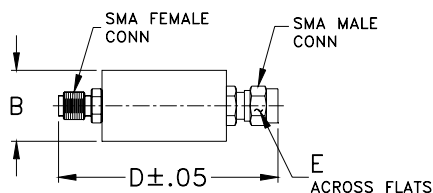

Outline Dimensions (inch/mm)

B	D	E	wt
.67	1.98	.312	grams
17.02	50.29	7.92	42.0

typical frequency response






electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ		
1.00	0.05	0.0	1.00	16.62
15.50	0.23	0.1	8.50	16.73
23.00	0.37	0.1	15.50	17.87
30.50	0.43	0.1	23.00	17.45
38.00	0.40	0.1	30.50	18.79
45.00	0.65	0.1	38.00	21.89
48.00	0.70	0.1	45.00	25.87
52.00	1.46	0.2	48.00	30.56
55.00	4.65	0.3	49.50	33.92
57.00	7.96	0.4	52.00	42.09
61.00	14.84	0.5	53.50	42.83
65.00	20.96	6.0	55.00	38.77
67.00	23.73	0.6	57.00	29.20
69.00	26.33	0.7	59.00	22.03
70.00	27.59	0.7	61.00	16.66
72.50	30.55	0.8	63.00	14.04
80.00	38.67	1.2	65.00	11.17
82.50	41.07	1.4	67.00	10.62
85.00	43.54	1.6	69.00	8.06
87.50	45.78	1.8	70.00	7.57
90.00	47.97	2.2	72.50	7.70
100.00	56.91	4.1	75.00	7.14
133.50	68.38	5.2	80.00	6.57
150.00	67.23	4.2	81.00	4.93
163.00	68.62	4.6	82.50	3.61
170.50	69.35	3.3	85.00	0.84
175.00	69.36	5.8	87.50	1.23
185.50	77.07	8.8	90.00	0.73
192.50	69.51	5.2	100.00	0.70
200.00	71.27	9.7	125.00	0.69

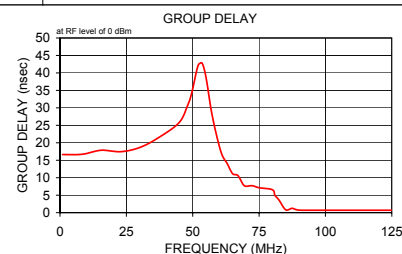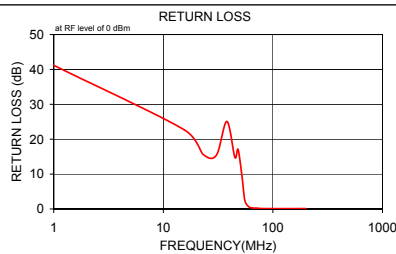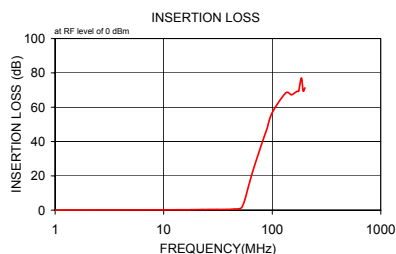

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

ALL NEW
minicircuits.com

REV. A
M98898
SLP-50
070308

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SLP-50+](#)