

50Ω

94 to 108 MHz

The Big Deal

- Flat group delay (10 ns)
- Narrow-band
- Good VSWR (1.2:1 typical)
- Fast roll-off
- Miniature shielded package



CASE STYLE: HF1139

Product Overview

The SXBP-101+ is a narrow-band bandpass filter fabricated using SMT technology. Covering 101 MHz \pm 7 MHz, these units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. It has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
Sharp shape factor	Sharp shape factor helps in adjacent channel rejection and hence increased selectivity.
Flat group delay (10ns typical)	The model has flat group delay of 10ns which ensures that the signal distortion is very less.
Good VSWR, 1.2:1 typical over pass-band	This provides well matched input and output ports.
Small size, 0.44" x 0.74" x 0.27"	The surface mount package enables SXBP-101+ to be used in compact designs.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Bandpass Filter

50Ω

94 to 108 MHz

SXBP-101+



CASE STYLE: HF1139

Features

- Flat group delay over passband
- Good VSWR, 1.2:1 typical in passband
- High rejection, 40 dB
- Shielded case
- Aqueous washable

Applications

- Test equipments
- Harmonic rejection
- Transmitters / receivers
- Military

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	101	—	MHz
	Insertion Loss	F1-F2	—	2.3	3.5	dB
	VSWR	F1-F2	—	1.2	1.7	:1
Stop Band, Lower	Insertion Loss	DC-F3	20	29	—	dB
	VSWR	DC-F3	—	31	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	20	27	—	dB
	VSWR	F4-F5	—	19	—	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.25W max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

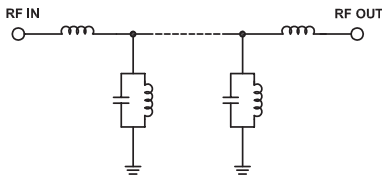

Typical Frequency Response




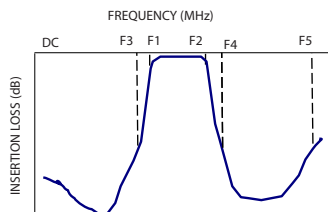


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	87.97	86.86	94.0	48.97
71.0	46.64	48.26	95.0	45.85
80.0	28.90	33.42	96.0	43.59
86.0	13.75	11.61	97.0	42.06
88.5	6.98	4.28	98.0	40.80
90.5	3.51	1.77	99.0	39.77
94.0	2.15	1.26	99.5	39.48
101.0	1.79	1.08	100.0	38.98
108.0	2.05	1.02	100.5	38.82
113.0	4.95	3.01	101.0	38.47
116.0	9.70	6.73	101.5	38.29
120.5	17.09	13.49	102.0	38.18
130.0	28.73	24.14	102.5	37.97
200.0	63.19	69.49	103.0	37.89
400.0	85.27	157.93	103.5	37.85
500.0	76.82	157.93	104.0	37.98
1000.0	69.83	75.53	105.0	38.36
2000.0	63.05	51.10	106.0	38.97
3000.0	40.83	38.61	107.0	40.24
3900.0	44.76	18.70	108.0	41.95

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

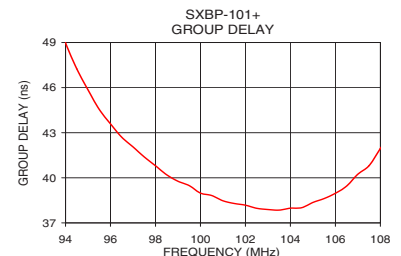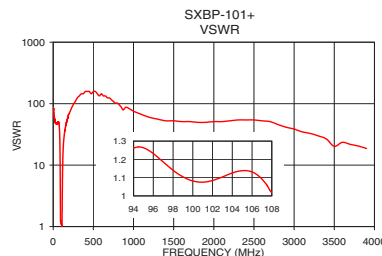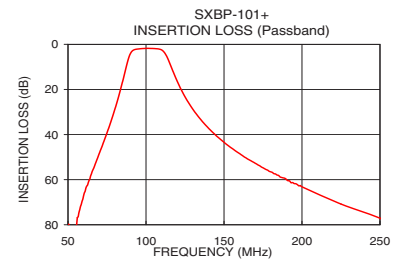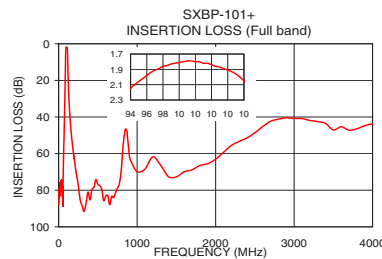

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp





Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

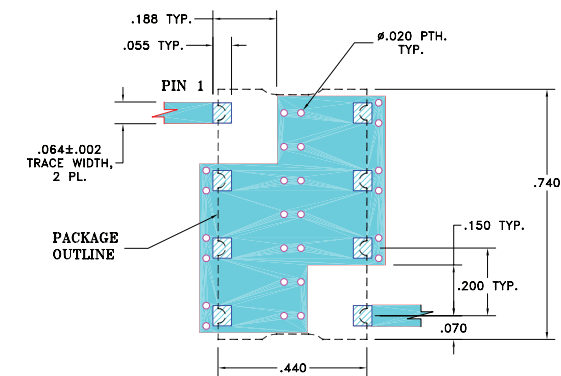
Demo Board MCL P/N: TB-368
Suggested PCB Layout (PL-230)




- NOTE:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025"±.002". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Drawing

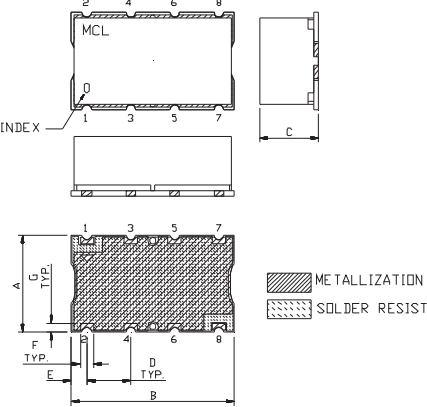

PCB Land Pattern



Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.44	.74	.27	.200	.07	.060	.040
11.18	18.80	6.86	5.08	1.78	1.52	1.02
H	J	K	L	M		wt
.660	.200	.470	.055	.060		grams
16.76	5.08	11.94	1.40	1.52		3.0

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SXBP-101+](#)