

Mini-Circuits

SURFACE MOUNT

RF Transformer

TC1-1G2+

50Ω 1.5 to 500 MHz

FEATURES

- Suitable for tin/lead and RoHS solder systems
- Good return loss
- Usable over 0.4-500 MHz
- Excellent amplitude unbalance, 0.1 dB typ. and phase unbalance, 2 deg typ. in 1 dB bandwidth
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT224-3

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Balanced to unbalanced transformation
- push-pull amplifiers

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			1		Ohm
Frequency Range		1.5		500	MHz
Insertion Loss*	1.5-500		3		dB
	2.5-400		2		
	5-350		1		


*Insertion Loss is referenced to mid-band loss, 0.6 dB typ.

MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. C

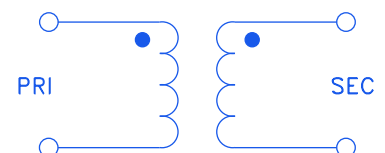

Mini-Circuits




PIN CONNECTIONS


PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

PRODUCT MARKING: N/A

OUTLINE DRAWING

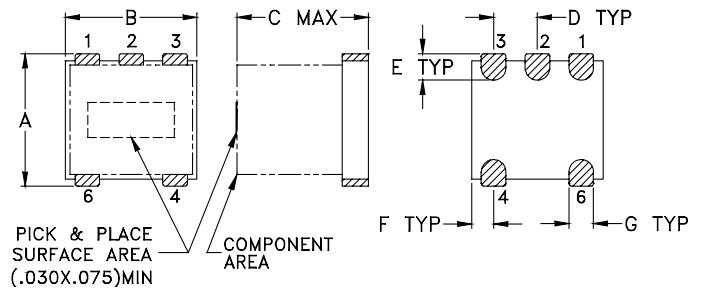


PCB Land Pattern

Suggested Layout,
Tolerance to be within $\pm .002$ OUTLINE DIMENSIONS (Inch
mm)



A	B	C	D	E	F
.150	.150	.150	.050	.030	.025
3.81	3.81	3.81	1.27	0.76	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.10

TAPE & REEL INFORMATION: F17



TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
1.51	1.15	13.64
2.49	0.91	13.85
4.35	0.72	13.75
6.87	0.62	13.76
16.75	0.60	13.91
40.86	0.69	14.35
99.67	0.71	14.31
243.10	1.13	12.92
353.08	1.47	11.62
502.30	2.06	10.10

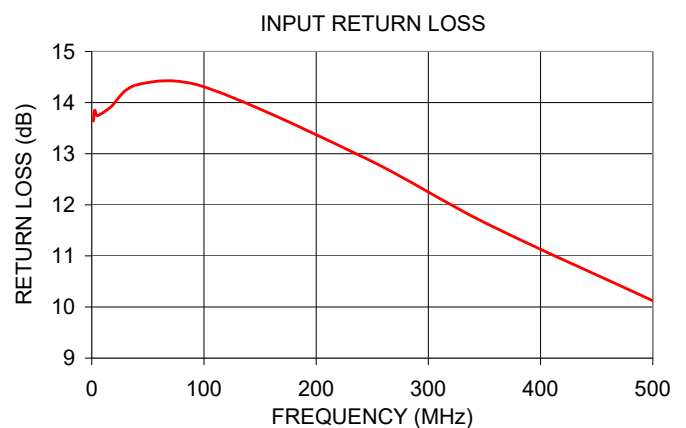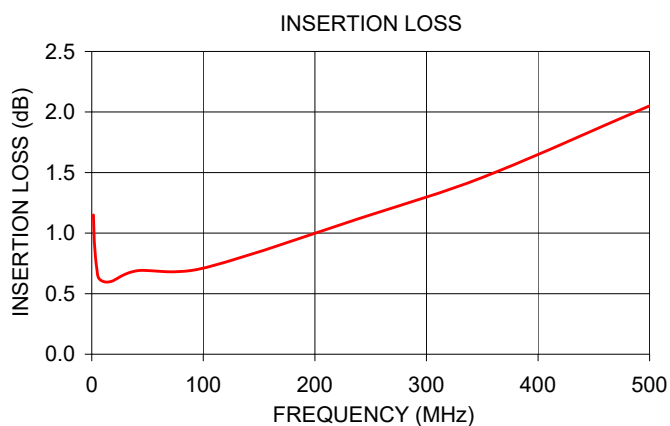

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TC1-1G2+](#)