

Mini-Circuits

SURFACE MOUNT

RF Transformer

TC1-33-75G2A+

75Ω 5 to 3000 MHz

FEATURES

- Suitable for tin/lead and RoHS solder systems
- Wideband, 5 to 3000 MHz
- Balanced transmission line
- Good return loss, 20 dB typ. at 1 dB band
- Excellent amplitude unbalance, 0.3 dB typ. and
- Phase unbalance, 3 deg typ. in 1 dB bandwidth
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT224-3

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- PCS
- Cellular
- Impedance matching
- Balanced amplifier
- Baluns

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			1		Ohm
Frequency Range		5		3000	MHz
Insertion Loss*	2000 - 3000		3.0		dB
	1200 - 2000		2.0		
	5 - 1200		1.0		
Amplitude Unbalance	1200 - 2000		1.0		dB
	5 - 1200		0.3		
Phase Unbalance	1200 - 2000		4.0		Degree
	5 - 1200		3.0		


* Insertion Loss is referenced to mid-band loss, 1.0 dB typ.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. K

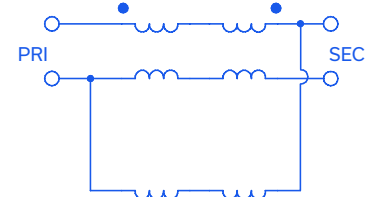

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-022263
TC1-33-75G2A+
MCL NY
240628

PAGE 1 OF 3




RF Transformer

TC1-33-75G2A+

75Ω 5 to 3000 MHz

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

DEMO BOARD MCL P/N: TB-145
SUGGESTED PCB LAYOUT: PL-244

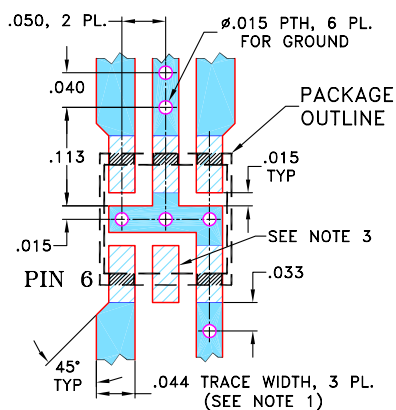

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" $\pm$.0015"; COPPER: 1/2 OZ. ON EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. THIS PAD IS NOT REQUIRED FOR AT224 CASE STYLE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

The diagram shows a three-bay portal frame. The vertical height of the frame is labeled J . The horizontal distance between the centerlines of adjacent bays is labeled K . The horizontal distance from the left support to the first bay centerline is labeled D . The members are labeled as follows: the vertical members are labeled "K TYP" and the horizontal members are labeled "H TYP". The frame is shown with hatched areas representing the members.


Suggested Layout,
Tolerance to be within $\pm.002$

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F
.150	.150	.150	.050	.030	.025
3.81	3.81	3.81	1.27	0.76	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.10



TAPE & REEL INFORMATION: F17





TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1.00	1.85	10.86	0.38	2.91
10.00	0.88	20.01	0.04	0.84
40.00	0.84	21.37	0.00	0.58
100.00	0.86	21.90	0.01	0.92
500.00	0.93	26.20	0.10	3.63
1000.00	0.97	19.72	0.18	4.76
1500.00	1.22	15.43	0.77	3.62
2000.00	1.62	13.94	1.40	0.56
2400.00	2.08	12.54	1.84	4.10
3000.00	3.11	9.59	2.06	12.70

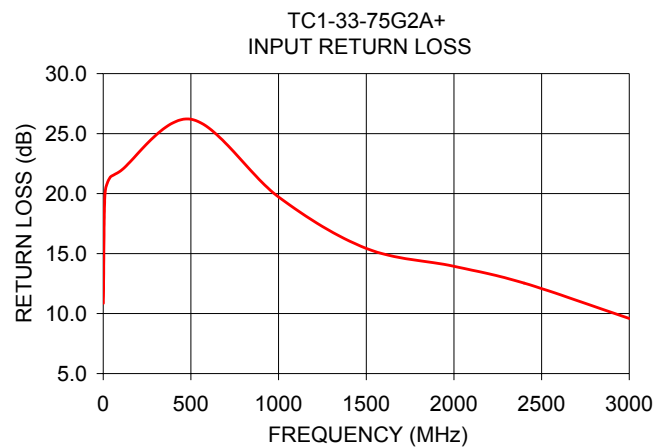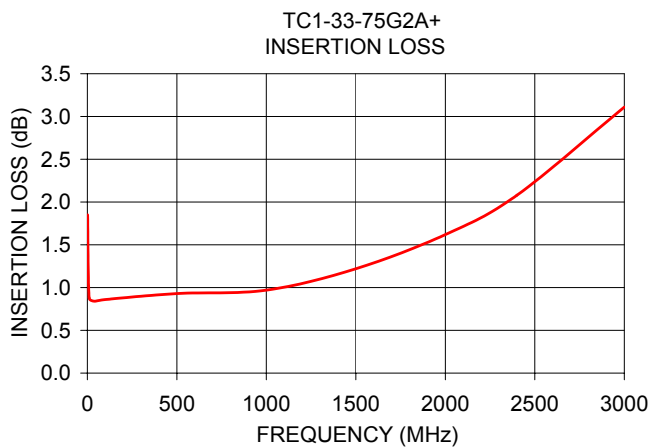

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TC1-33-75G2A+](#)