



Mini-Circuits

SURFACE MOUNT

RF Transformer

TC2-112G2+

50Ω 2 to 1100 MHz

FEATURES

- Suitable for tin/lead and RoHS solder systems
- Wideband, 2 to 1100 MHz
- Good return loss
- Sted-down autotransformer
- Aqueous washable

APPLICATIONS

- Cellular



Generic photo used for illustration purposes only

CASE STYLE: AT224-3

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (Primary/Secondary)			50/25		
Frequency Range		2		1100	MHz
Insertion Loss*	10-800		1.0		dB
	2-1100		2.0		


*Insertion Loss is referenced to mid-band loss, 0.4 dB typ.
Stepdown, 50 ohm primary, 1.5 pF across secondary

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. D



REV. B
ECO-022233
TC2-112G2+
MCL NY
240626





SURFACE MOUNT

RF Transformer

TC2-112G2+

Mini-Circuits


50Ω 2 to 1100 MHz

PIN CONNECTIONS


Function	Pin Number
PRIMARY DOT	6
PRIMARY	3
SECONDARY DOT	1
SECONDARY	3

PRODUCT MARKING: N/A

OUTLINE DRAWING

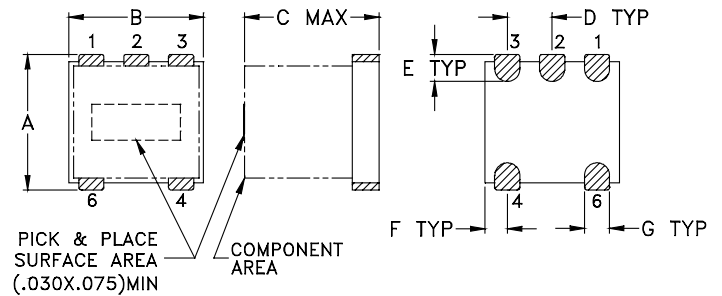

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F
.150	.150	.150	.050	.030	.025
3.81	3.81	3.81	1.27	0.76	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.10

TAPE & REEL INFORMATION: F17





SURFACE MOUNT

RF Transformer



TC2-112G2+

Mini-Circuits

50Ω 2 to 1100 MHz

TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
2.00	0.33	26.71
30.00	0.22	36.55
100.00	0.27	32.51
200.00	0.32	27.91
400.00	0.41	22.57
500.00	0.46	20.75
600.00	0.51	19.23
800.00	0.65	16.60
900.00	0.75	15.41
1000.00	0.86	14.26
1100.00	0.99	13.17

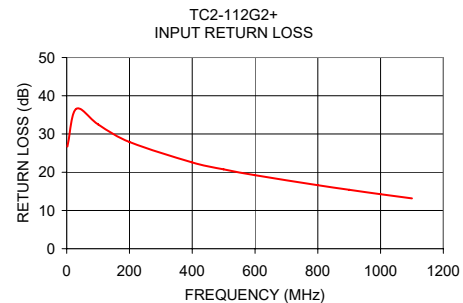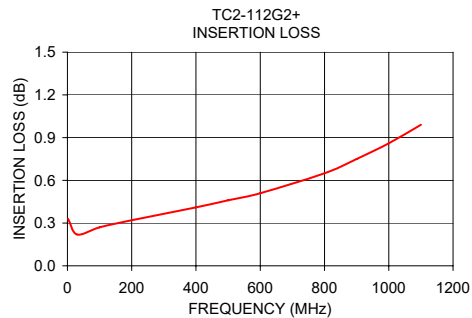

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TC2-112G2+](#)