

## **SURFACE MOUNT**

RF Transformer

50Ω 0.5 to 300 MHz

- \*Addition of Top Hat® feature Benefits
- Allows faster pick-and-place
- · Enables visual identification marking

#### **FEATURES**

- Wide band 0.5-300 MHz, Usable over 0.2-450 MHz
- Good return loss
- · Impedance matching
- · Plastic base with leads
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT224-1A

+RoHS Compliant The +Suffix identifies RoHS Compliance our website for methodologies and qualifi

#### **APPLICATIONS**

CATV

#### **ELECTRICAL SPECIFICATIONS AT 25°C**


Parameter	Frequency (MHz)	Min.	Тур.	Max.	Unit
Impedance Ratio (secondary / primary)			4		Ohm
Frequency Range		0.5		300	MHz
	_		3.0		
Insertion Loss*	0.5-300		2.0		dB
	1.5-100		1.0		

<sup>\*</sup> Insertion Loss is referenced to mid-band loss, 0.3 dB typ.

#### **MAXIMUM RATINGS**

Parameter	Ratings
Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.





#### **SURFACE MOUNT**

## RF Transformer

TC4-1T+


 $50\Omega$  0.5 to 300 MHz

#### **PIN CONNECTIONS**


PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2
NOT USED	5

**PRODUCT MARKING: NA** 

#### **OUTLINE DRAWING**

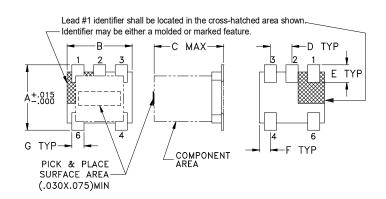

#### **PCB Land Pattern**



Suggested Layout, Tolerance to be within±.002

#### OUTLINE DIMENSIONS (Inch )

Α	В	С	D	Е	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	Н	J	K		wt
G .028	H .065	J .190	K .030		wt grams

**TAPE & REEL INFORMATION: F17** 




# RF Transformer

TC4-1T+

 $50\Omega$  0.5 to 300 MHz

#### **TYPICAL PERFORMANCE DATA**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.50	0.51	16.81
1.00	0.44	20.73
10.00	0.27	30.31
50.00	0.30	32.32
70.00	0.32	30.95
100.00	0.36	28.39
150.00	0.40	24.12
200.00	0.45	20.32
250.00	0.54	17.09
300.00	0.62	14.29

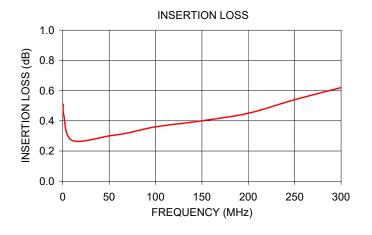



#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Mini-Circuits}}{\text{TC4-1T+}}$