



Mini-Circuits®

SURFACE MOUNT

Directional Coupler

TCD-10-1W+

50Ω 10 to 750 MHz

FEATURES

- Wideband, 10 to 750 MHz
- Low mainline loss, 1.2 dB typ.
- Aqueous washable
- Leads for excellent solderability
- Protected by US Patent 6,140,887



Generic photo used for illustration purposes only

CASE STYLE: DB714

APPLICATIONS

- VHF/UHF
- Signal sampling
- Communications

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range	—	10	—	750	MHz
Mainline Loss ¹	10-100	—	1.3	2.1	dB
	100-350	—	1.2	1.6	
	350-750	—	1.4	2.0	
Coupling		—	10.3±0.5	—	dB
Coupling Flatness (±)		—	±0.8	—	dB
Directivity	10-100	17	22	—	dB
	100-350	14	18	—	
	350-750	—	15	—	
VSWR	10-750	—	13	—	:1
Input Power	10-100	—	—	0.5	W
	100-750	—	—	1.0	

1. Mainline loss includes theoretical power loss at coupled port.


MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C*
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

* Case temperature is defined as temperature on ground leads.

ELECTRICAL SCHEMATIC

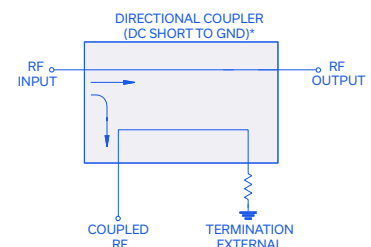

*Electrical schematic is for Directional coupler with internal transformer(s) and external termination

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. K
ECO-014559
TCD-10-1W+
WP/CP/AM
220804
PAGE 1 OF 3



TCD-10-1W+



Mini-Circuits

SURFACE MOUNT

Directional Coupler


TCD-10-1W+

50Ω 10 to 750 MHz


TYPICAL PERFORMANCE DATA

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)	Directivity (dB)	Return Loss (dB)		
	In-Out	In-Cpl		In	Out	Cpl
9.00	1.18	10.17	22.87	17.95	27.94	17.96
15.00	1.18	10.14	22.85	18.48	30.46	18.53
24.00	1.18	10.13	22.75	18.67	31.68	18.74
30.00	1.18	10.14	22.68	18.71	31.90	18.79
50.00	1.20	10.16	22.53	18.77	31.89	18.87
70.00	1.21	10.16	22.38	18.78	31.59	18.90
100.00	1.21	10.17	22.13	18.78	30.97	18.93
300.00	1.25	10.31	19.54	18.13	26.04	18.34
500.00	1.32	10.49	16.70	17.08	22.79	17.34
800.00	1.47	10.73	13.13	15.61	19.73	15.58


MAINLINE LOSS

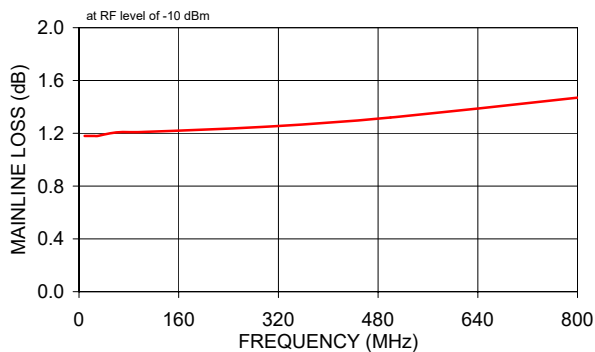

COUPLING & DIRECTIVITY

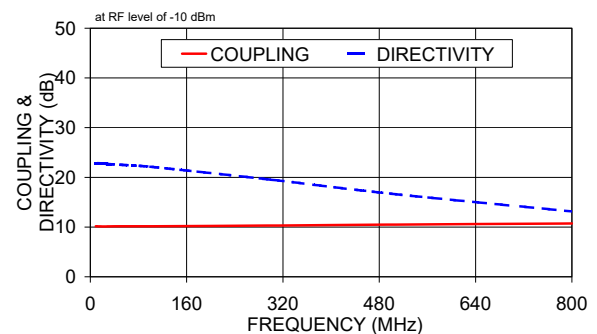

RETURN LOSS

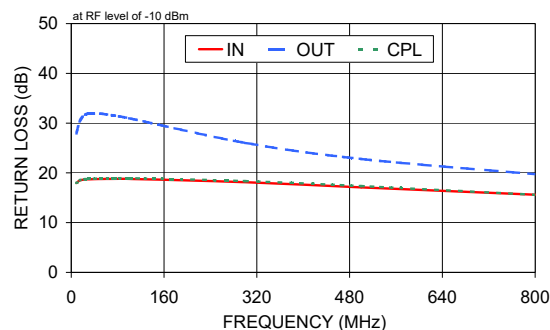

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TCD-10-1W+](#)