Low Pass Filter

VLFX-1350+

DC to 1350 MHz (30 dB Typ.Isolation up to 20 GHz) 50Ω

The Big Deal

- Very good rejection, 30 dB typ. up to 20 GHz
- Excellent power handling, 10W
- Rugged unibody construction



Generic photo used for illustration purposes only CASE STYLE: FF1118

Product Overview

VLFX-1350+ is a 50Ω low pass filter built in rugged unibody construction. Covering DC-1350 MHz bandwidth, these units offer good matching within the passband and high rejection in stopband, 30 dB typical up to 20 GHz. This will find its applications in harmonic rejection, transmitters / receivers and test instrumentation.

Key Features

Feature	Advantages		
Low passband insertion loss	Suitable for high performance application		
Fast roll-off	Provides very good adjacent band rejection		
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups		

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Puchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Low Pass Filter

VLFX-1350+

DC to 1350 MHz (30 dB Typ. Isolation up to 20 GHz) 50Ω




Features

- Very good isolation, 30 dB typ. up to 20 GHz
- Excellent power handling, 10W
- Temperature stable LTCC internal structure
- Re-entry frequency > 20 GHz
- Protected by US patent 6,943,646
- · Rugged unibody construction


Applications

- · Harmonic rejection
- Transmitters/receivers
- Lab use
- · Test instrumentation

Functional Schematic



Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Generic photo used for illustration purposes only CASE STYLE: FF1118

> Connectors Model VLFX-1350+

Electrical Specifications(1) at 25°C

Parameter		F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Insertion Loss	DC-F1	DC-1350	_	1.3	2.0	dB
Pass Band	Freq. Cut-Off	F2	2050	_	3.0	_	dB
	VSWR	DC-F1	DC-1350	_	1.4	_	:1
	Insertion Loss	F3	2425	20	30	_	dB
Stop Band	IIISEITIOII LOSS	F4-F5	2600-20000	_	30	_	dB
	VSWR	F3-F5	2425-20000	_	10	_	:1


(1) In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


Maximum Ratings			
Operating Temperature	-55°C to 100°C		
Storage Temperature	-55°C to 100°C		
RF Power Input*	10W max.		


^{*}Passband rating, derate linearly to 3.5W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.07	1.02
100	0.16	1.05
1000	0.75	1.42
1350	1.16	1.72
2050	2.53	1.46
2100	3.37	1.77
2125	4.07	2.04
2200	8.10	3.74
2300	19.29	8.20
2345	27.00	10.36
2395	38.13	12.61
2425	38.49	13.92
2600	40.05	20.90
5000	84.21	37.21
7500	63.06	35.46
10000	88.83	54.12
12500	63.02	17.76
15000	52.14	2.80
19000	32.39	14.56
20000	62.42	20.41









A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.


B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Puchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Coaxial Connections

INPUT	SMA-Male
OUTPUT	SMA-Female

Outline Drawing

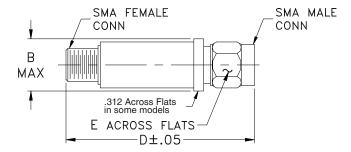

Outline Dimensions (inch mm)

wt.	E	D	В
grams	.312	2.67	.410
17.0	7.92	67.82	10.41

Note: Please refer to case style drawing for details

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms/jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits:

VLFX-1350+