



Mini-Circuits

MMIC SURFACE MOUNT


Power Splitter/Combiner

WP4W1+

4 Way-0° 50Ω 3000 to 4200 MHz

FEATURES

- Excellent isolation, 26 dB typ.
- Good phase unbalance, 2 deg. typ.
- Good amplitude unbalance, 0.15 dB typ.
- Small size, .118" x .118" x .035"
- High ESD level
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Line-of-sight links
- Satellite down link
- WIMAX
- Radar

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		3000		4200	MHz
Insertion Loss* (above 6.0 dB)	3000-4200	—	0.9	1.9	dB
Isolation	3000-4200	17	26	—	dB
Amplitude Unbalance	3000-4200	—	—	0.5	dB
Phase Unbalance	3000-4200	—	—	9	deg.
VSWR (Port S)	3000-4200	—	1.7	—	:1
VSWR (Ports 1,2,3,4)	3000-4200	—	1.3	—	:1


*Includes test fixture loss, 0.3 dB typ.

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-40°C to 85°C
Storage temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

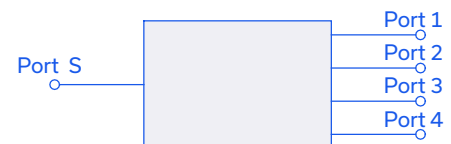

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
ECO-015507
WP4W1+
MCL NY
221025

PAGE 1 OF 3



Mini-Circuits

MMIC SURFACE MOUNT


Power Splitter/Combiner

WP4W1+

4 Way-0° 50Ω 3000 to 4200 MHz

PAD CONNECTIONS

SUM PORT	2
PORT 1	12
PORT 2	10
PORT 3	6
PORT 4	4
GROUND	1,3,5,7,8,9,11, paddle

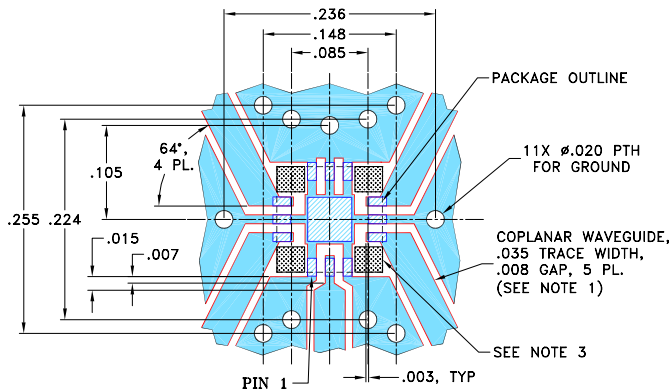
DEMO BOARD MCL P/N: TB-395+
SUGGESTED PCB LAYOUT (PL-259)

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.


- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

PRODUCT MARKING

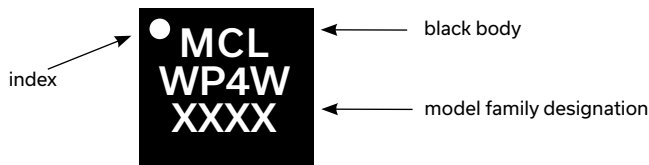


Marking may contain other features or characters for internal lot control

OUTLINE DRAWING

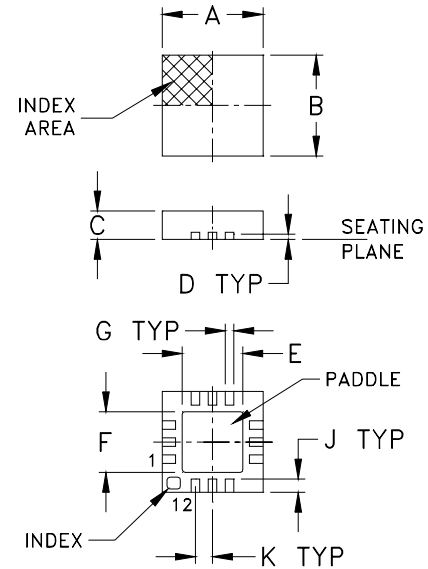

PCB Land Pattern

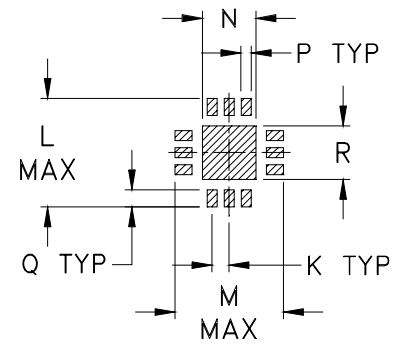Suggested Layout,
Tolerance to be within ±.002OUTLINE DIMENSIONS (Inch
mm)

A	B	C	D	E	F	G	H	J
.118	.118	.035	.008	.057	.057	.009	---	.016
3.00	3.00	0.89	0.20	1.45	1.45	0.23	---	0.41
K	L	M	N	P	Q	R		wt
.020	.127	.127	.049	.010	.020	.049		grams
0.51	3.23	3.23	1.24	0.25	0.51	1.24		0.02

TAPE & REEL INFORMATION: F66

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 3



Mini-Circuits

MMIC SURFACE MOUNT

Power Splitter/Combiner




WP4W1+

4 Way-0° 50Ω 3000 to 4200 MHz

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Total Loss ¹ (dB)				Amplitude Unbalance (dB)	Isolation (dB)			Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
3000.00	7.21	7.24	7.16	7.17	0.07	27.20	25.33	27.63	2.26	1.85	1.47	1.43	1.45	1.48
3100.00	7.09	7.10	7.02	7.05	0.08	28.62	26.85	29.06	1.87	1.72	1.46	1.40	1.42	1.46
3200.00	7.00	6.98	6.90	6.96	0.09	29.80	28.32	30.21	1.54	1.62	1.44	1.37	1.39	1.45
3300.00	6.93	6.89	6.82	6.89	0.11	30.56	29.56	30.83	1.15	1.55	1.42	1.34	1.37	1.44
3350.00	6.90	6.85	6.79	6.87	0.11	30.73	30.02	30.89	1.21	1.53	1.41	1.33	1.35	1.43
3400.00	6.89	6.83	6.76	6.86	0.12	30.74	30.27	30.78	1.40	1.51	1.41	1.32	1.34	1.42
3450.00	6.87	6.81	6.75	6.85	0.12	30.58	30.33	30.51	1.58	1.50	1.40	1.31	1.33	1.42
3500.00	6.87	6.80	6.74	6.84	0.13	30.28	30.15	30.10	1.76	1.50	1.39	1.29	1.31	1.41
3550.00	6.87	6.79	6.73	6.85	0.14	29.86	29.77	29.59	1.99	1.50	1.38	1.28	1.30	1.40
3600.00	6.88	6.79	6.73	6.85	0.15	29.35	29.23	29.02	2.17	1.51	1.37	1.27	1.29	1.39
3700.00	6.90	6.79	6.74	6.87	0.16	28.20	27.89	27.80	2.56	1.55	1.36	1.25	1.26	1.38
3800.00	6.94	6.81	6.77	6.92	0.17	27.00	26.42	26.58	2.93	1.60	1.35	1.23	1.24	1.36
3900.00	6.99	6.85	6.81	6.97	0.18	25.85	25.03	25.43	3.30	1.68	1.33	1.21	1.22	1.35
4000.00	7.05	6.90	6.86	7.03	0.20	24.80	23.75	24.39	3.65	1.75	1.32	1.19	1.21	1.34
4200.00	7.19	7.02	6.97	7.17	0.22	23.03	21.58	22.66	4.34	1.91	1.30	1.17	1.18	1.32

1. Total Loss = Insertion Loss + 6dB splitter loss.

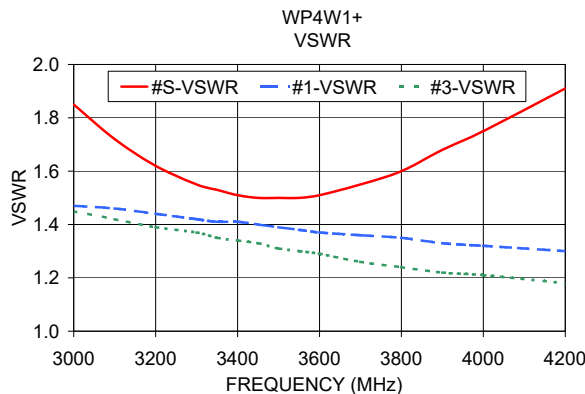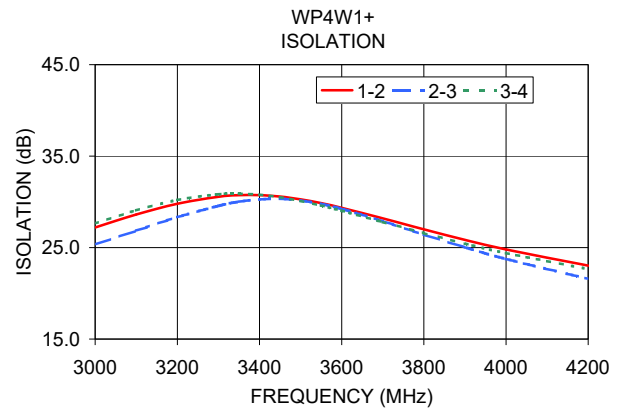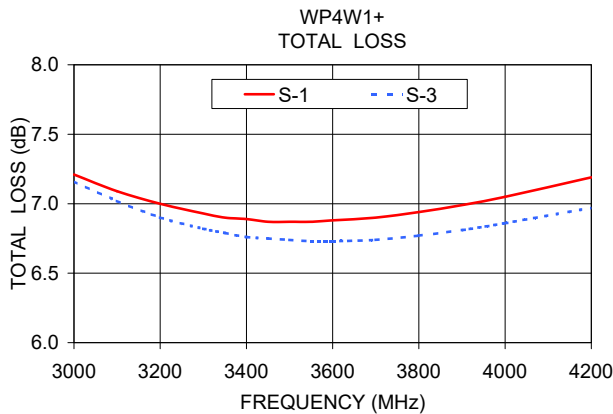

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[WP4W1+](#)