

# Bias-Tee/Diplexer

**Z4BT-2R15G+**

50Ω 10 to 2150MHz (10MHz, 950-2150MHz)

## The Big Deal

- Compact L-Band all-in-one DC and Reference Inject Bias Tee
- Integrated 10 MHz Diplexer and DC Bias-Tee
- DC pass through: 2A, 48V
- Low RF Insertion Loss: 0.5 dB Typ. over 950-2150 MHz



Generic photo used for illustration purposes only  
CASE STYLE: CC1823

## Product Overview

The Z4BT-2R15G+ is a combination of bias tee and diplexer designed to support L-Band communications application. Ideally suited for satellite communication installations, the Z4BT-2R15G+ combines wide band, flat response bias tee performance with additional functionality to inject 10 MHz reference clock in a single compact design. Built in a rugged shielded case, the Z4BT-2R15G+ is equipped with SMA Female connectors for all ports.

The Z4BT-2R15G+ is ideally suited for powering Satellite up converters and LNBs where IF, DC and 10 MHz clock reference are all injected on a single coax cable.

## Key Features

Feature	Advantages
Compact Integration	Combines the features and capability of two coaxial components into one single compact assembly. Bias tee + Reference injection to enable remote LNB / BVC installations.
Filtered 10 MHz Port	Allows easy coupling of 10 MHz signals to coax for PLL reference clocks reducing cable runs. Blocks 10MHz from RF port reducing unwanted 10 MHz leakage.
DC pass through / DC Feed	Enables remote powering of antenna mounted amplifiers while splitting the RF signal. Eliminates additional cable runs. Designed to handle up to 2A at 48 Volts, the Z4BT-2R15G+ can also support a wide variety of remotely powered RF equipment.
Connectors	All connectors are SMA Female.
Bi-Directional Operation	Can be used at both ends of a feed to inject RF, DC and 10 MHz.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Bias-Tee / Diplexer

50Ω 10 to 2150MHz (10MHz, 950-2150MHz)

## Z4BT-2R15G+



Generic photo used for illustration purposes only

CASE STYLE: CC1823

Connectors	Model
SMA FEMALE	Z4BT-2R15G+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	30dBm Max.
Voltage at DC port	+48V Max.
Input Current	2A
DC resistance from DC to RF&REF&DC port	0.50hm Typ.
Permanent damage may occur if any of these limits are exceeded.	

### Coaxial Connections

RF	1 (SMA female)
COMMON (RF+DC+10 MHz)	2 (SMA female)
REF (10 MHz)	3 (SMA female)
DC	S (SMA female)

### Outline Drawing

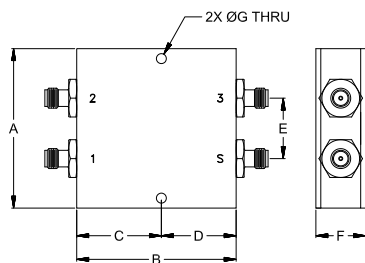

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	Wt.
2.000	2.000	1.062	.938	.758	.624	.125	grams
50.80	50.80	26.97	23.83	19.25	15.85	3.18	99

Note: Please refer to case style drawing for details

### Features

- Integrated multifunctional L-Band+DC Bias-tee + Common reference inject
- DC pass through: 2A, 48V
- Low insertion loss, 0.5dB Typ.
- Good Isolation, 50dB Typ.

### Applications

- Satellite IF band
- Satellite Receivers / Transmitters
- Test accessory


### Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	REF to Common	10	-	0.5	0.8
		RF to Common	950-2150	-	0.7	1.5
	VSWR	Common & REF	10	-	1.4	1.8
		RF & Common	950-2150	-	1.2	1.6
Stop Band Isolation	REF to RF	10	70	90	-	-
		RF to DC	10	27	40	-
		Common to DC	10	27	40	-
		REF to DC	10	27	40	-
	RF to REF	950-2150	35	65	-	-
		RF to DC	950-2150	30	50	-
		Common to DC	950-2150	30	50	-
		REF to DC	950-2150	30	50	-

### Typical Performance Data

FREQ. (MHz)	INSERTION LOSS (dB) With 2A		ISOLATION (dB) With 2A				VSWR (:1) With 2A		
	Port		Port				Port		
	3 to 2	2 to 1	3 to 1	1 to S	2 to S	3 to S	RF	Common	REF
1	2.83	98.66	101.89	98.76	7.05	11.21	24598.95	1.23	2.65
5	0.52	103.97	111.34	108.81	31.78	32.29	14008.37	1.06	1.10
10	0.40	95.25	92.64	106.05	41.07	39.96	28842.40	1.06	1.04
15	0.36	94.08	93.13	97.98	45.75	43.24	6238.07	1.08	1.05
50	0.63	73.02	71.08	107.43	62.49	67.70	1910.14	1.68	1.60
100	5.44	48.68	55.86	99.61	65.95	62.67	730.07	7.76	8.60
500	60.90	2.59	60.07	45.82	48.03	68.19	2.23	2.62	182.44
900	73.17	0.35	73.48	59.78	60.48	72.16	1.12	1.12	102.39
950	71.88	0.35	73.09	60.18	61.63	68.84	1.14	1.14	94.55
1000	71.57	0.36	72.63	60.41	62.45	66.00	1.16	1.16	89.61
1100	71.36	0.37	72.22	60.18	60.31	62.48	1.21	1.22	77.89
1250	68.74	0.41	69.40	58.20	56.23	58.31	1.27	1.29	65.31
1400	64.89	0.45	65.20	54.98	52.89	54.98	1.30	1.33	55.16
1500	62.02	0.47	62.32	52.45	50.27	52.94	1.31	1.35	49.53
1700	56.22	0.54	56.42	48.94	45.60	49.35	1.34	1.38	40.97
1800	53.60	0.57	53.71	48.84	44.20	47.78	1.35	1.40	37.72
1900	51.01	0.60	51.11	49.84	43.57	46.29	1.35	1.40	35.09
2000	48.34	0.62	48.50	49.79	42.92	44.84	1.35	1.39	32.32
2100	45.63	0.65	45.79	47.87	41.50	43.37	1.34	1.39	30.12
2150	44.24	0.67	44.47	46.92	40.54	42.62	1.34	1.38	29.24

### Functional Block Diagram

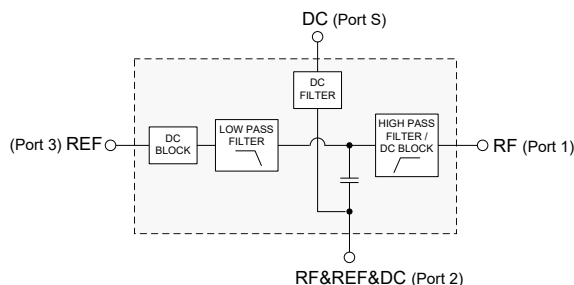


#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)


Z4BT-2R15G+  
RF to Common port  
INSERTION LOSS WITH CURRENT ( $P_{in} = 0\text{dBm}$ )

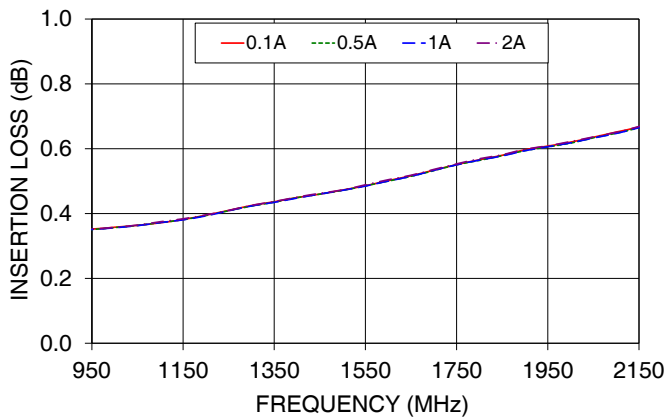


Z4BT-2R15G+  
REF to Common port  
INSERTION LOSS WITH CURRENT ( $P_{in} = 0\text{dBm}$ )

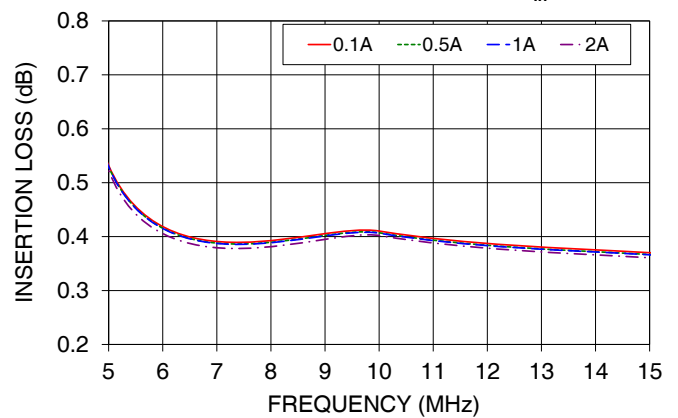


Z4BT-2R15G+  
RF to REF port  
ISOLATION WITH CURRENT ( $P_{in} = 0\text{dBm}$ )

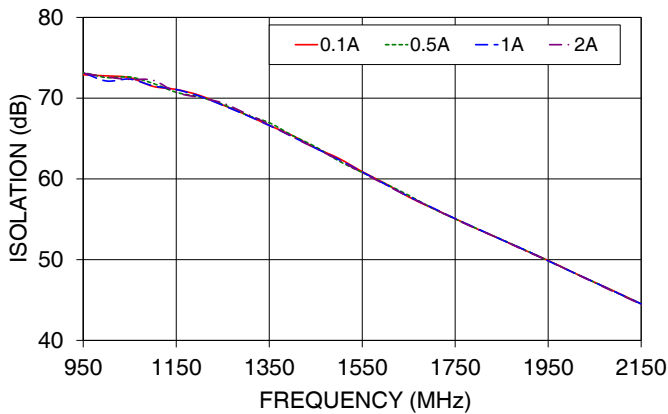


Z4BT-2R15G+  
REF to RF port  
ISOLATION WITH CURRENT ( $P_{in} = 0\text{dBm}$ )

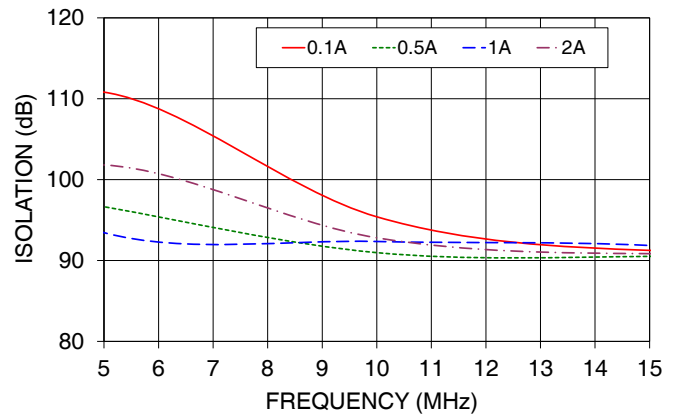

Z4BT-2R15G+  
RF to DC port  
ISOLATION WITH CURRENT ( $P_{in} = 0\text{dBm}$ )

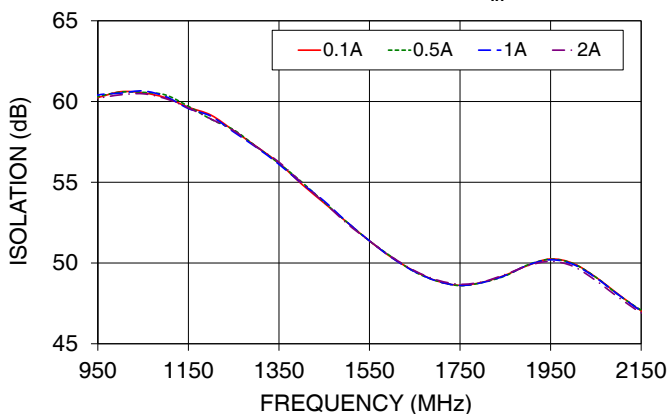







Z4BT-2R15G+  
RF to DC port  
ISOLATION WITH CURRENT ( $P_{in} = 0\text{dBm}$ )

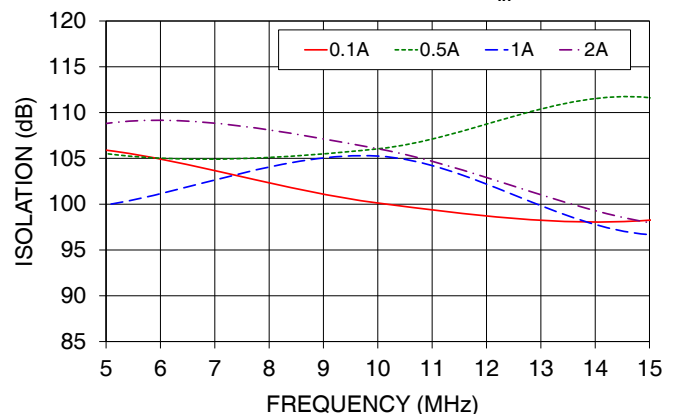

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp)



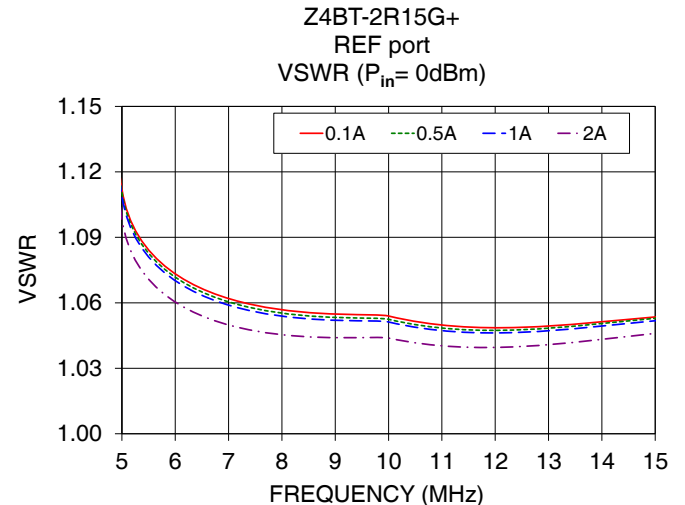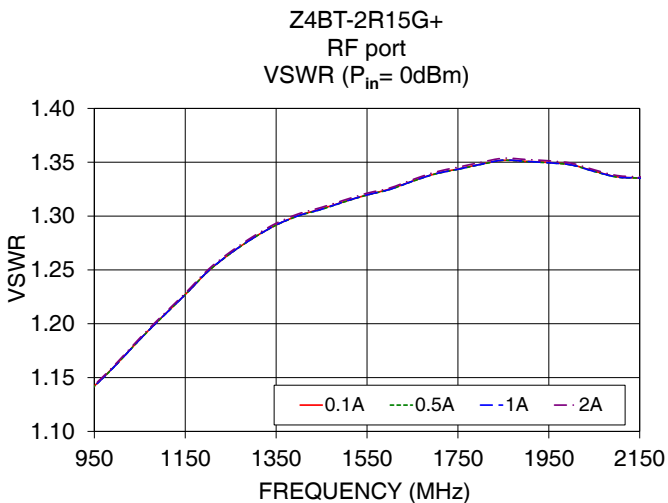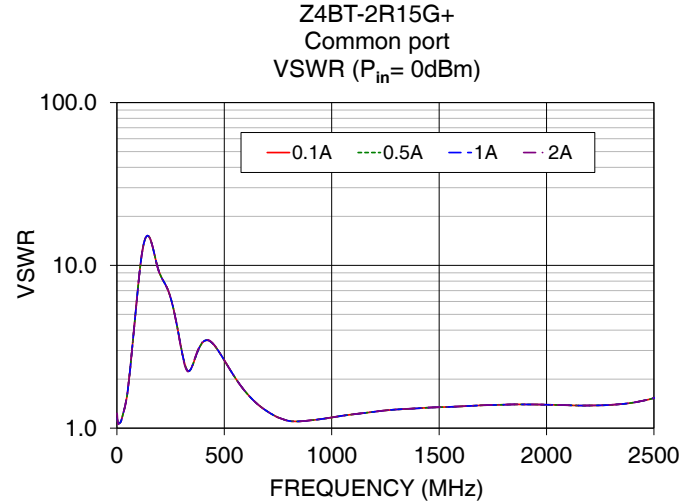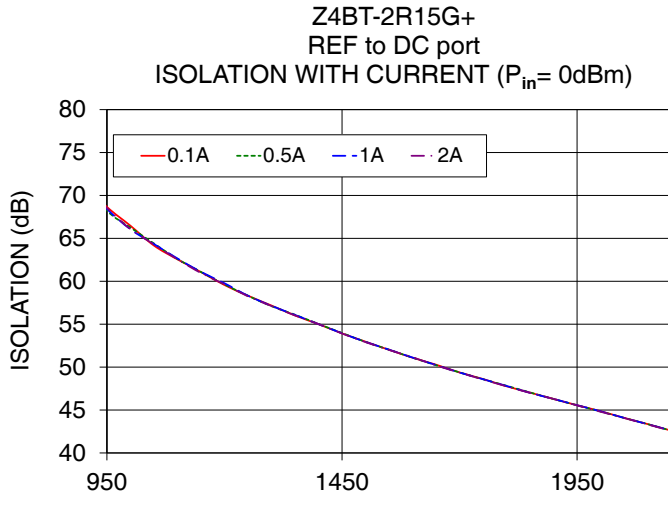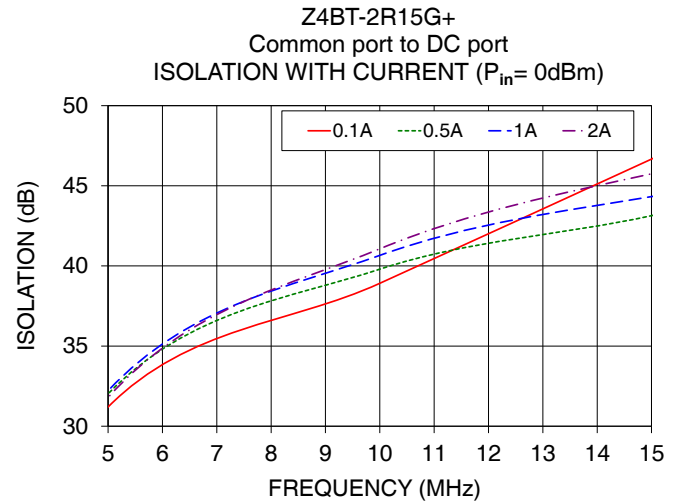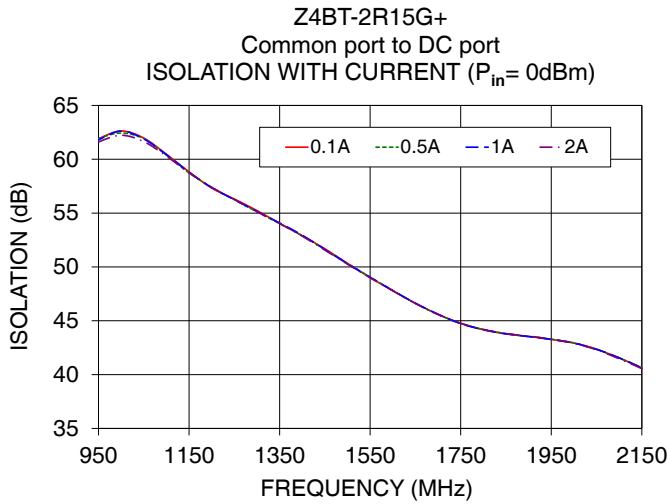

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[Z4BT-2R15G+](#)