

DC Pass

Matching Transformer

Z7550-FFNM+

50/75Ω

DC to 2300 MHz

The Big Deal

- Low matching loss of 0.6 dB typ
- Wideband coverage, DC-2300 MHz
- Maximum DC current handling capacity of 5A
- Connectorized package



Generic photo used for illustration purposes only
CASE STYLE: H795-1

Product Overview

Z7550-FFNM is a DC passing matching transformer that allows impedance matching between 50Ω and 75Ω systems with minimum reflection into the circuit. This matching transformer will find its application in any system where 50Ω-75Ω matching is required.

Key Features

Feature	Advantages
Low insertion loss	This introduced minimum reflection into the circuit.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Matching Transformer

50/75Ω

DC to 2300 MHz

Z7550-FFNM+

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	5A max.
DC Resistance	0.2Ω max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

Input	F-Female
Output	N-Male

Outline Drawing

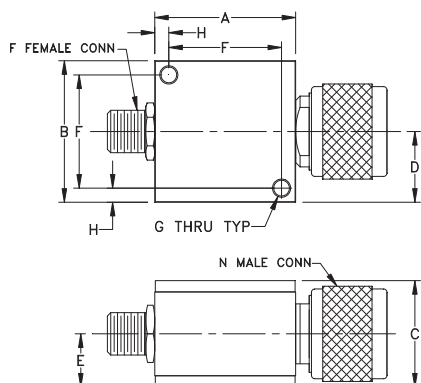


Outline Dimensions (inch mm)

A	B	C	D	E
1.25	1.25	.94	.63	.47
31.75	31.75	23.88	16.00	11.94
F	G	H	wt	
1.000	.125	.125	grams	
25.40	3.18	3.18	67	

Note: Please refer to case style drawing for details

Functional Schematic

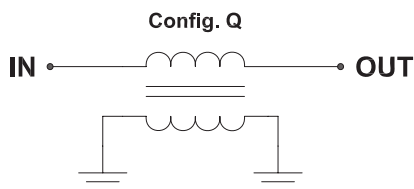

Features

- Low matching loss of 0.6 dB typ
- Wideband coverage, DC-2300 MHz
- Connectorized package

Applications

- Impedance matching



Generic photo used for illustration purposes only

CASE STYLE: H795-1

Connectors	Model
75Ω F-F	Z7550-FFNM+
50Ω N-M	

+RoHS Compliant



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range	-	DC	-	2300	MHz
Insertion Loss	10	-	-	1.0	dB
	950-2300	-	0.6	1.2	
VSWR	10	-	-	1.8	:1
	950-2300	-	-	1.5	
Power	DC-2300	-	-	2.0	W

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR	
		75 Ω	50 Ω
10	0.02	1.50	1.50
50	0.04	1.49	1.51
100	0.08	1.49	1.51
200	0.17	1.48	1.51
450	0.40	1.47	1.47
950	0.34	1.20	1.19
1200	0.37	1.12	1.14
1500	0.44	1.18	1.22
2000	0.52	1.09	1.13
2300	0.55	1.09	1.03

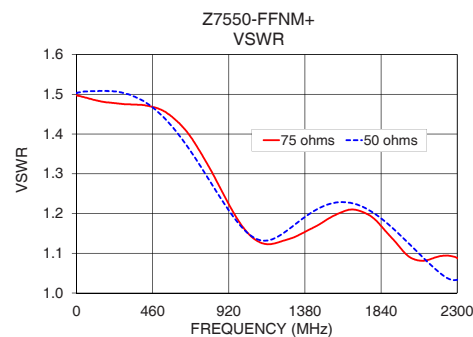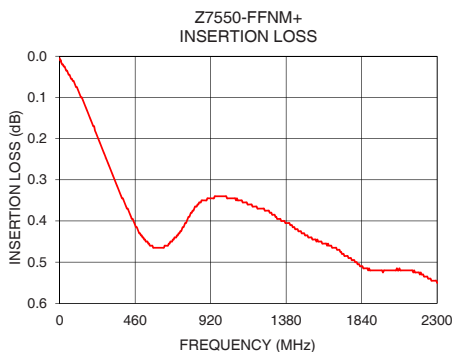

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[Z7550-FFNM+](#)